

The Definitive Guide
for Underground Safety
& Damage Prevention

BEST PRACTICES 22.0

CGASM



Published March 2026
© 2026 Common Ground Alliance.
All rights reserved



BEST PRACTICES

The Foundation of Damage Prevention

The Common Ground Alliance's (CGA) Best Practices Guide represents the collective wisdom of the damage prevention industry, featuring over 160 proven practices covering all phases of the damage prevention process. Each practice is vetted and approved through rigorous consensus from 15 stakeholder groups and CGA's Board of Directors, ensuring real-world effectiveness and broad industry support.

From corporate safety and damage prevention programs to state legislation, CGA's Best Practices Guide serves as the authoritative resource for damage prevention. Through our Damage Information Reporting Tool (DIRT), we continually validate these practices against real-world outcomes and industry data. Organizations accredited through CGA's Damage Prevention Institute (DPI) commit to these foundational practices, recognizing their vital role in protecting lives and underground infrastructure.

Damage prevention is a shared responsibility. Make CGA Best Practices part of your safety program today.

Scan to learn more:



TABLE OF CONTENTS

Chapter 1 Introduction	1
Practice Statements and Descriptions	
Chapter 2 Planning and Design.....	5
Chapter 3 811 Center	15
Chapter 4 Locating and Marking	27
Chapter 5 Excavation	39
<i>NEW Best Practice 5.35: Large/Complex Project Request, page 52</i>	
Chapter 6 Mapping	53
Chapter 7 Compliance.....	59
Chapter 8 Public Education and Awareness	69
Chapter 9 Reporting and Evaluation	77
Chapter 10 Miscellaneous	83
Appendix A Glossary of Terms and Definitions	85
<i>NEW Definitions: Extraordinary Circumstances, page 87; and Waterway, page 89</i>	
Appendix B Uniform Color Code and Marking Guidelines.....	91
Appendix C Sample Forms, Reports and Releases	105
Appendix D Additional References and Endnotes.....	109
Appendix E CGA Member Organizations.....	113

TERMS AND CONDITIONS OF USE

The CGA must make the Best Practices subject to the following limitations:

- 1: The CGA does not endorse any company, technology, technique or product. No inference of endorsement shall be taken from any CGA Best Practice or from the CGA generally.
- 2: The CGA reserves the right to alter, modify or repeal the Best Practices at any time. Further, the CGA reserves the right to fix technical inaccuracies, typographical errors or make other modifications without prior notice.
- 3: Best Practice Guide users must respect CGA's copyrights and trademarks.
- 4: The CGA Best Practices are provided "as is" and without any warranty, either expressed or implied, including any warranty of merchantability fitness for a particular purpose, or non-infringement.
- 5: The CGA Best Practices are presented as a general guide. The CGA encourages all users to consult and consider not only the CGA Best Practices, but also (i) employer practices, (ii) industry practices, (iii) federal and state statutes and regulations, (iv) building and fire codes, and (v) local laws, regulations and ordinances.
- 6: References in each Best Practice are those that were in effect at the time the Best Practice was approved unless otherwise noted. Best Practices are derived from existing multi-industry, governmental and public practices that are determined to be "best" in enhancing safety and damage prevention through rigorous review and evaluation processes developed by the CGA.

CHAPTER 1

Introduction

Best Practices Guide

The Best Practices Guide is the preeminent and trusted resource for underground damage prevention with proven practices that cover all phases of the safe digging process. The practices included within this guide are agreed to by consensus of 15 industry stakeholder groups and are designed to improve worker safety, protect vital underground infrastructure, and ensure public safety during excavation activities conducted in the vicinity of existing underground facilities.

CGA releases a new edition of Best Practices every spring with all approved updates that reflect changes in damage prevention.

Best Practices 22.0 — New Practices and Modifications

During the past year, CGA added and amended practices that appear in Version 22.0. The Best Practices Committee is also actively establishing a set of new Marine Practices, which will appear in future editions of this Guide once completed and approved. The following new practices and modifications were approved by the Best Practices Committee and CGA Board for 22.0:

- Modification of Practice 2-15, *Use of Qualified Designers*
- Modification of Practice 3-16, *Locate Request*
- Modification of Practice 3-17, *Practices/Technology to Optimize Notification Areas*
- Modification of Practice 3-19, *Direct Electronic Locate*
- Modification of Practice 3-24, *Web Services Solution*
- Modification of Practice 3-25, *Identification of Unknown Lines*
- Modification of Practice 3-26, *811 Center Membership*
- Modification of Practice 4-8, *Temporary Facility Markings*
- Modification of Practice 4-20 A, *Locating and Marking in Waterways*
- Modification of Practice 5-23, *Locate Request Updates*
- Addition of Practice 5-35, *Large/Complex Project Locate Request*
- Addition of definitions of “*Extraordinary Circumstances*” and “*Waterway*”
- Modification of definitions of “*Facility*,” “*Facility Owner/Operator*,” and “*Membership*”
- Modification of *Guidelines for Operator Facility Field Delineation* (Appendix B)

History of the Common Ground Alliance

Common Ground Study

In 1998, Congress passed the Transportation Equity Act for the 21st Century (TEA 21), directing the U.S. Department of Transportation (USDOT) to study best practices for enhancing worker safety, protecting underground infrastructure and ensuring public safety during excavation activities nationwide.

The USDOT's Pipeline and Hazardous Materials Safety Administration (PHMSA) convened 162 stakeholders representing oil and gas transmission and distribution, telecommunications, railroads, utilities, electric, water, sewer, cable TV, 811 centers, excavators, locators, design engineers, regulators, and government entities at federal, state and local levels.

A key element was the consensus process: For a practice to become a “best practice,” all stakeholder groups had to agree they could adhere to it. This consensus approach continues to guide CGA’s Best Practices Committee today. The study identified and validated over 130 best practices to enhance safety and prevent damages to underground facilities. In July 1999, the study was presented to the Secretary of Transportation.

Establishment of the Common Ground Alliance

Following the study’s presentation, PHMSA facilitated the Damage Prevention Path Forward. On June 15, 2000, the Common Ground Alliance received its Certificate of Incorporation from the District of Columbia.

CGA’s founding purposes included:

- Preventing damage to underground infrastructure and increasing safety through shared responsibility
- Supporting research and development
- Conducting public awareness and education programs
- Identifying and disseminating stakeholder best practices
- Serving as a clearinghouse for damage data collection, analysis and dissemination

“Damage prevention is a shared responsibility” was and remains a foundational principle of CGA’s work.

CGA Today

CGA’s mission is to prevent damage to underground utility infrastructure and protect those who live and work near these important assets through the shared responsibility of our stakeholders.

Participating stakeholder groups include electric, engineering/design, equipment manufacturing, excavators, gas transmission, gas distribution, insurance, locators, 811 centers, oil, public works, road builders, state regulators, emergency services and telecommunications. Each stakeholder group designates a “Primary” to serve as spokesperson and participate in Best Practices consensus decisions, ensuring that each group’s voice is represented.

In addition to the Best Practices Committee, CGA’s mission is driven by seven other working committees including Data Reporting and Evaluation, Educational Programs and Marketing, Regional Partners, One Call Systems International, Technology, the Damage Prevention Institute Program and Next Practices Advisory.

CGA’s Best Practices Guide remains the primary resource for stakeholders, governments and associated industries addressing safety and damage prevention issues at local, state and national levels.

Best Practices Guide

The Best Practices Committee developed the following Guide based on the Common Ground Study. It includes Chapters dedicated to different functions of the damage prevention system, as well as Appendices with supplementary resources and definitions.

The stakeholders involved with the original Common Ground Study intended that the Best Practices would be a working document that would evolve as more effective and efficient practices and technology advanced. As CGA Best Practices are added, amended or vacated, changes are reflected in annual version updates, numbered sequentially.

Use of Icons

CGA uses icons to assist readers in identifying the practices that pertain to their specific industry/stakeholder group. Throughout the document, the icons appear next to each practice and correspond to the following groups: Project Owners, Facility Owners, Excavators, 811/One Call Centers, Designers and Locators. The icon legend is provided below and also is available at the start of each chapter.



811 Center



Facility Owner



Excavator



Locator



Project Owner



Designer

Feedback and Proposed Modifications

CGA welcomes comments and suggestions on improving the format and updating the content of the Best Practices. To submit a comment or to propose a new practice or practice modification, visit CGA's Best Practices web site at <https://bestpractices.commongroundalliance.com/> to submit a Best Practice proposal.


Process for Developing and Revising Best Practices

Anyone can submit a proposed Best Practice for consideration. The CGA Best Practices Committee evaluates each proposal to determine if it merits formal review.

If accepted for review, the Committee assigns a transaction record (TR) number to the proposal and establishes a Task Team composed of volunteers from multiple stakeholder groups. The Task Team reviews existing practices, reaches internal consensus and drafts recommended wording that is subsequently posted for stakeholder and Best Practices Committee review.

After the 30-day stakeholder review period, the Committee considers the proposal. If consensus is reached by all the Primary Stakeholder Representatives, the Best Practice moves to the CGA Board of Directors for final approval and publication in the CGA Best Practices manual.

Best Practice Review Process

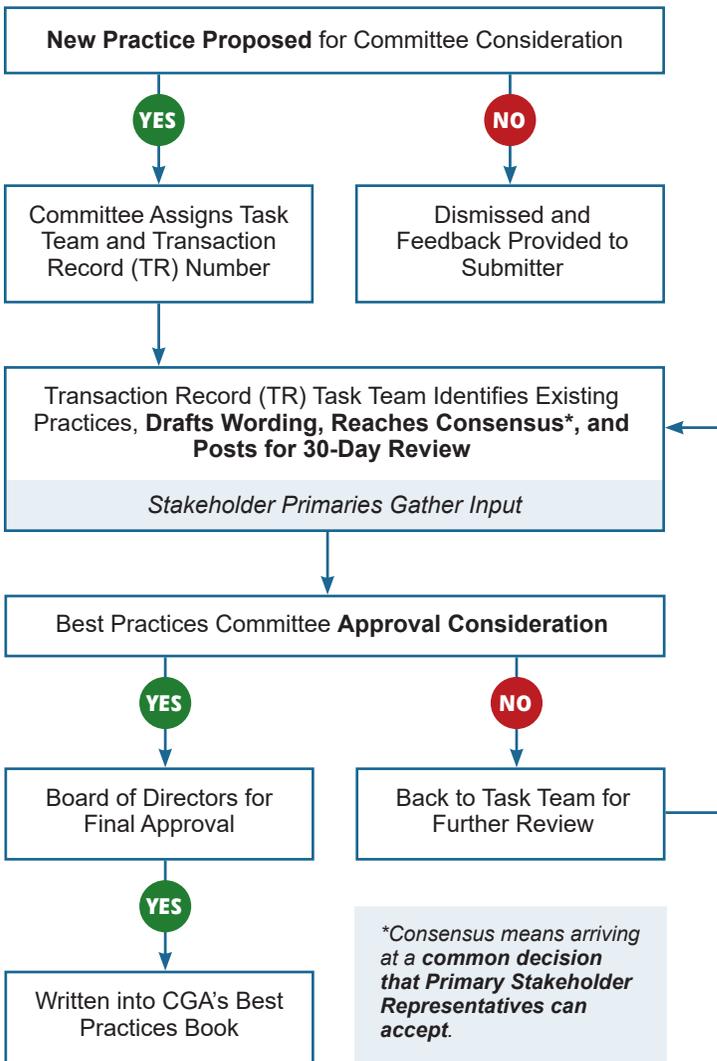

CHAPTER 2

Planning and Design



811 Center



Facility Owner



Excavator



Locator



Project Owner



Designer

2-1: Plat Designation of Existing Underground Facility Easements



Practice Statement: Plats prepared for the development of real property identify and show the alignment of any existing buried facilities and the presence and extent of any existing easements and/or rights of way.^{18/}

Practice Description: Various items are required on the plats filed prior to the development of lands. Where plats are required to be filed, the items required include the identification of the easements of underground facilities traversing the land described on the plat. Identifying easements of underground facilities on the plat increases notice to developers and the public about the existence of the underground facilities. Notifying owners of underground facilities that a plat has been filed alerts underground facility owners/operators of the need to establish communication between the developers and operators that will facilitate a plan and design for the use of the land that complements the underground facility.

Benefits:

Often underground facility owners/operators do not receive notice of developments impacting their facilities until excavation activity has commenced. This compromises the optimal use of the land and potentially compromises the integrity of the underground facility.

References:

- St. Louis County, Minnesota, zoning ordinances

2-2: Gathering Information for Design Purposes



Practice Statement: The designer uses all reasonable means of obtaining information about underground facilities in the area of the planned excavation.

Practice Description: During the planning phase of the project, all available information is gathered from facility owners/operators. This includes maps of existing, abandoned and out-of-service facilities; cathodic protection and grounding systems; as-builts of facilities in the area if the maps are not current; proposed project designs; and schedules of other work in the area. This information is gathered for the purpose of route selection and preliminary neighborhood impacts and as part of the process of impact analysis when evaluating different design possibilities. Methods of gathering information may include contacting entities such as an 811 center, facility owners/operators, coordinating committees/councils, other designers, engineering societies, and governmental agencies to help identify underground facility owners/operators in an excavation area. Gathering information also may include a review of the site for aboveground indications of underground facilities (e.g., permanent signs or markers, manhole covers, vent pipes, pad-mounted devices, riser poles, power and communication pedestals, and valve covers). The 811 center provides a listing of operators directly to the designer or to the designer's subsurface utility engineer. This information is made available in formats that are accessible to all users, such as voice, fax, email or website. Once the operators are identified, the designer contacts the operators directly or uses the one call system. The facility owner/operator may locate the underground facilities or provide locations of the underground facilities to the designer by other means, such as by marking up design drawings or providing facility records to the designer.

Benefits:

- Gathering underground facility information and including this information in the planning phase minimizes the hazards, cost and work to produce the final project.
- Safety is enhanced.
- Unexpected conflicts with facilities are eliminated.
- Facility relocations are minimized.

References:

- Wisconsin Sec. 186.0175 Stats
- Minnesota Statute 216D
- Pennsylvania Act 287 of 1974, as amended by Act 187 of 1996
- See related Finding Number 3, "Identifying Existing Facilities in Planning and Design"
- "Construction Management Interference Control Manual," Consolidated Edison, New York, New York, June 9, 1997
- Subsurface Utility Engineering, Federal Highway Administration (FHWA), February 1999, Office of Program Administration
- Florida Department of Transportation Utility Accommodation Manual, Document No. 710-020-001-d, Section 11.4, January 1999

2-3: Identifying Existing Facilities in Planning and Design^{87/95/}

Practice Statement: Designers indicate the existence of all public and private underground facilities on drawings during planning and design, including if the application of a subsurface utility engineering (SUE) process and appropriate quality level of verification were applied or required for construction.

Practice Description: During the planning phase of the project, facilities are shown on preliminary design plans. The planning documents include possible routes for the project together with known underground facility information. The various facility owners/operators are then given the opportunity to provide appropriate feedback. During the design phase of the project, underground facility information from the planning phase is shown on the plans. If information was gathered from field-located facilities, potholing, underground facility surveys, or subsurface utility engineering (SUE), this is noted on the plans. The designer and the contractor should understand the SUE process and the quality levels of the information included on the plans. If an elevation was determined during information gathering, it is shown on the plan. The facilities shown include active, abandoned, out-of-service, and proposed facilities. The design plans include a summary drawing showing the proposed facility route or excavation, including streets and a locally accepted coordinate system. The plans are then distributed to the various facility owners/ operators to provide the opportunity to furnish additional information, clarify information, and identify conflicts. In the event confirmation is unavailable regarding the physical location of an existing public or private underground facility, a process to identify these facilities is noted on the plan and in bid/contract documents as applicable.

Benefits: Providing complete underground facility information and including this information on design drawings and in bid/contract documents when applicable reduces hazards, simplifies coordination, and minimizes the cost to produce the final project.

2-4: Utility Coordination^{96/}



Practice Statement: Project owners and facility owners/operators regularly communicate and coordinate with each other concerning future and current projects in the planning phase.

Practice Description: Utility coordination requires a tiered approach: initially sharing proposed project information (Coordinate PA tool) that can result in cost sharing opportunities; and a deeper dive once design begins and the physical location of existing facilities becomes critical. It is in this latter state where the damage prevention process begins. Coordination fosters an open exchange of information among private and public facilities, governmental agencies, and construction-related organizations. Utility coordination also promotes cooperation among said groups in the planning, design, and construction of projects affecting the overall good of participating parties, their organizations and customers or constituents, and the general public. The formation of utility coordinating committees (or councils) includes private utilities, public agency utilities, engineering firms, contractor associations, and others with facilities or business interests in public rights-of-way. Coordinating committees function in multiple communities, counties, and states/provinces to promote excavation project coordination. Typical items of discussion include facility excavations in existing and recently paved roadways, disruption of essential facility services, location of utility facilities, environmental impact of damages to utilities, permit procedures, right-of-way access controls, and underground facility damage prevention. Plans of future roadway improvement and of future facility installations are reviewed regularly.

Benefits:

- Wisconsin Administrative Rule Chapter Trans 220 “Utility Facilities Relocations”
- Arizona Utility Coordinating Committee (AUCC) Public Improvement/ Project Guide, December 1996
- Highway/Utility Guide. Publication No. FHWA-SA-93-049. Office of Technology Applications, FHWA, U.S. Department of Transportation, June 1993

References:

- Pennsylvania One Call – Coordinate PA tool

2-5: Markers for Underground Facilities^{63/}



Practice Statement: The presence and type of underground facilities are indicated by permanent aboveground and belowground markers and material.

Practice Description: A combination of aboveground and belowground markers is used to identify and locate underground facilities. The facility is color-coded in accordance with the American Public Works Association (APWA) guidelines to assist in identifying an aboveground or belowground facility.

The purpose of aboveground markers is to identify underground facilities, not to locate for excavation or circumvent the one call process. However, designing underground facilities for future location reduces the risk of an incorrectly marked underground facility during an excavation project. Aboveground markers are developed during the design process and include the company name, type of facility, emergency contact and the one call number. The locations and types of markers are specified in the construction plans. The design provides a marker system that includes, but is not limited to, stream crossings, public road crossings, other facilities’ rights-of-way, railroad crossings, heavy construction areas, and any other location where it is necessary to identify the underground facility location.

If nondetectable facilities are being installed, the design includes a means to accurately locate the underground facility from the surface. Road decals, stencils, tracer tapes, electronic markers or other appropriate systems may mark areas where traditional markers are considered impractical.

The purpose of belowground markers is to identify underground facilities. Belowground markers are used in conjunction with aboveground markers. Belowground markers may include tracer wire, warning tape and/or electronic marking devices. More than one type of belowground marker may be used. Installation of belowground markers should comply with AGA, ANSI, or other industry standards or governing regulations including, but not limited to, using a coated corrosion-resistant wire, installing cathodic protection, proper grounding, marking the end placement or approximate location of belowground markers with aboveground markers, protecting belowground markers from damage during backfill operations, and placement/method of installation.

Benefits:

Provisions to aid in future locating requests are included in the design. In addition, an effective marker system is beneficial to the underground facility owner/operator and first responders to an area involving more than one underground facility or an incident near underground facilities.

References:

- 49 CFR Parts 192 and 195
- Industry standards:
 - AGA *Plastic Pipe Manual for Gas Service*, 2006 Edition
 - APWA, "Guidelines for Uniform Temporary Marking of Underground Facilities"
 - ANSI ASC GPTC Z380 Gas Piping Technology Guide (<https://www.aga.org/gptc>)
 - NFPA-70 (2014), "National Electrical Code"

2-6: Follow All Applicable Codes, Statutes and Facility Owner/Operator Standards



Practice Statement: When planning and designing the installation of new or replacement of existing underground facilities, the designer follows all federal, state/provincial, and local guidelines, codes, statutes, and other facility owner/operator standards.

Practice Description: The designer of a facility project typically considers only national industry codes, regulations and practices applicable to that particular facility and not of adjacent facilities. Regulations, codes, standards and other design documents generally specify depth of cover and horizontal and vertical clearances between adjacent facilities. However, they are not always prescriptive and can be subject to interpretation by the designer. In addition, certain codes allow exceptions to the prescribed minimum clearances, contingent upon approval between the affected facility owners/operators. The designer also must consider the protection and temporary support of adjacent facilities and any interference to existing cathodic protection and grounding systems. Consequently, the designer must provide specifications of safety measures to be taken and procedures for emergency notification and repairs in case an adjacent facility is damaged. Designers are aware of proposed and revised standards and codes that may affect the project.

Benefits:

The designer who reviews codes pertaining to adjacent facilities minimizes any potential conflict of code clearance requirements and facilitates future locating efforts.

2-7: Use of Qualified Contractors

Practice Statement: Qualified contractors are used to excavate on and near underground facilities.

Practice Description: Contractors that excavate on and near underground facilities possess the qualifications necessary to conduct such activities in a manner that is skillful, safe and reliable. The requisite qualification of the contractor serves to protect the public and the integrity of underground facilities in the vicinity of the excavation. Using qualified contractors ensures that all contractors who bid and work on a project employ safe work habits and are capable of performing the requested work. When working with contractors, the project owner is familiar with the contractors' work experience and financial abilities and does not ask the contractors to bid beyond their capabilities. Allowing a competitive bidding process from qualified and competent contractors ensures the best quality and pricing available while reducing damages to underground facilities.

Benefits:

- Enhances safety
- Increases the quality of work
- Reduces damage to facilities

References:

- Florida Law (Chapter 337.14 FS) and Rules of the State of Florida, Department of Transportation, Chapters 14–22
- Duke Energy of Houston, Texas, procedures

2-8: Mandatory Prebid Conferences

Practice Statement: A mandatory prebid conference is held and bids are accepted only from attending contractors.

Practice Description: Depending on the level of impact of proposed construction upon facilities in the excavation area, the project owner or project designer requires potential contractors and facility owners/operators to attend a mandatory prebid conference. This prebid conference is used to discuss, among other things, the particular facilities in the area and the requirements to properly protect, support and safely maintain the facilities during excavation. Official minutes are taken and disseminated as written to all attendees.

Benefits:

Prebid conferences provide a forum for the contractor, owner and other interested parties to discuss a project and record binding changes or clarifications to the scope of the project. The prebid conference also provides an opportunity for all parties to review contract documents, regulatory requirements, schedules and submittal formats. Most large projects involve multiple levels of subcontracting activity, as well as multilayered regulatory oversight. The prebid conferences traditionally address these issues in an open forum so that all bidders are equally aware of the ground rules. The ground rules can be both commercial and technical in nature, covering the spectrum from performance bonds to safety practices.

References:

- Industry and governmental practices
- Florida Department of Transportation
- Duke Energy of Houston, Texas, procedures

2-9: Continuous Interface Between the Designer and Potential Contractors During the Prebid/Bid Phase



Practice Statement: Once a project design is completed, the designer participates in the prebid/bid process.

Practice Description: The designer's continuing involvement during the prebid/bid phase with the potential contractor(s) allows for more effective communications between all parties. The designer can assess whether the interested bidders have the expertise needed and the correct understanding of the intended design.

Benefits:

- By providing quality assurance, this practice minimizes potential safety concerns and delays to project completion.
- The designer would have the opportunity to relay information not readily shown on the plans, such as accommodations of facility adjustments required to construct the project.

References:

- Industry practice
- Expert opinion

2-10: Continuous Interface between the Designer and the Contractor During the Construction Phase



Practice Statement: The designer continues to interface with the selected contractor throughout the construction phase.

Practice Description: This practice allows the designer to be available for preconstruction conferences, unforeseen conditions and design changes, and for postconstruction conferences.

Benefits:

- Potential safety concerns are resolved more quickly, thereby minimizing subsequent modifications to the project design, costs and completion.
- The designer's inspections of the project during different stages are facilitated.

References:

- Industry and government practice

2-11: As-built Drawings



Practice Statement: As-built drawings are prepared and the information is recorded to aid future excavations and locates.

Practice Description: Installation is made in accordance with the approved construction plans. Any deviation to the plans is documented and such changes are indicated on the as-built drawings. As-built information is recorded, retained and made available for subsequent excavation.

Benefits:

As-built drawings serve as an information source for future projects to minimize damage to existing facilities.

References:

- Union Pacific Railroad procedures
- Expert opinion
- Industry and governmental practices

2-12: Supply-line Separation



Practice Statement: When installing new direct-buried supply facilities in a common trench, a minimum of 12 in. radial separation is maintained between supply facilities, such as steam lines, plastic gas lines, other fuel lines and direct-buried electrical supply lines. If 12 in. of separation cannot be feasibly attained at the time of installation, then mitigating measures are taken to protect lines against damage that might result from proximity to other structures. Examples may include the use of insulators, casing, shields or spacers. If there is a conflict among any of the applicable regulations or standards regarding minimum separation, the most stringent are applied.^{6/}

References:

- National Electric Safety Code IEEE C2-2007 (2007 Edition)
- Industry practices

2-13: Trenchless Excavation



Practice Statement: All stakeholders adhere to all best practices and the following general guidelines prior to, during and after any trenchless excavation (as applicable).

Practice Description:

- The project owner and design engineer take prudent measures to make the determination to use trenchless excavation installation.
- The project owner and design engineer coordinate with facility owners to design projects that maintain minimum radial clearances between the new facility and existing facilities. Minimum clearances are equal to or greater than applicable standards.
- The project owner and design engineer establish line and grade of the proposed excavation to maintain the established minimum clearances. (See also Best Practices 4-19 and 5-29).^{13/}

References:

- See Appendix D

2-14: Subsurface Utility Engineering (SUE)^{88/97/}

Practice Statement: When applied properly during the design phase, Subsurface Utility Engineering (SUE) provides significant cost and damage-avoidance benefits and the opportunity to correct inaccuracies in existing facility records.^{19/}

Practice Description: In certain cases and environments, it may be difficult or impossible to determine the locations of all utilities and/or impediments with sufficient accuracy to avoid damage or delay during construction. In these cases, SUE is applied during the design phase to locate, identify, and characterize all existing utility infrastructure (and other relevant non-utility features) found within a given project/area. SUE is applied in a structured manner in accordance with practices and quality levels found in ASCE 38-22 “Standard Guideline for Investigating and Documenting Existing Utilities.” The project owner dictates the required quality levels (QL) as well as the amount of effort expended by the SUE provider on each. Although the standard is more detailed and comprehensive, the following is a brief summary of the quality levels defined therein:

- QL-D involves utility records research and interviews with knowledgeable utility personnel.
- QL-C involves surface survey and identifying and recording aboveground features of subsurface utilities, such as manholes, valves, and hydrants.
- QL-B involves application of “surface geophysical methods,” such as EM-based locating instruments, GPR, radar tomography, metal detectors, and optical instruments, to gather and record approximate horizontal (and, in some cases, vertical) positional data.
- QL-A involves physical exposure via “non-destructive soft digging” (vacuum excavation or hand digging) and provides precise horizontal and vertical positional data.

SUE results are integrated into the design process, in which design engineers use the information to create construction plans that accommodate existing infrastructure, thereby reducing the overall risk of conflicts and/or damage.^{11/}

References:

- U.S. Department of Transportation — FHWA (12/1999). Cost Savings on Projects Utilizing Subsurface Utility Engineering. Pub. No. FHWA-IF-00-014
- U.S. Department of Transportation — FHWA (3/2001). Subsurface Utility Engineering: Enhancing Construction Activities. Pub. No. FHWA-IF-01-011
- ASCE 38-22 Standard Guideline for Investigating and Documenting Existing Utilities
- Pennsylvania state law – Underground Utility Line Protection Act of 1974 as amended

2-15: Use of Qualified Designers^{113/}



Practice Statement: Project owners employ qualified design and SUE providers.

Practice Description: When new utility infrastructure is installed, project owners employ qualified designers and SUE providers. Such providers have knowledge and understanding of applicable CGA Best Practices and of the ASCE 38-22 standard. Providers are qualified in application of the associated design practices and SUE processes. The providers also are knowledgeable of the operation of any involved equipment and interpretation of results where applicable. Use of qualified SUE providers provides higher quality information to designers, who in turn can minimize utility conflicts by better depicting actual subsurface conditions on the construction plans.^{21/}

See also

- Practice Statement 2-3: Identifying Existing Facilities in Planning and Design
- Practice Statement 2-7: Use of Qualified Contractors
- Practice Statement 2-14: Subsurface Utility Engineering (SUE)

References:

- New Jersey Public Service Electric and Gas

2-16: Project Coordination^{25/}



Practice Statement: Large and/or complex projects may require the use of specific processes established to enhance safety and to coordinate buried-facility damage-prevention efforts among all potentially affected stakeholders throughout the life of the project. Such processes are intended to complement, and be used in addition to, standard and customary one call notification and locating practices.

Practice Description: A “large/complex” project is a single project or a series of repetitive, small, related-scope, short-term projects that impact facilities over a long period of time or over a large area. Such projects pose a unique set of safety and damage prevention challenges when using standard one call practices, specifically as they apply to ongoing locating and re-marking requirements. These unique challenges can be addressed by the establishment of special processes, including (but not limited to) the following:

- A method for identifying such projects
- Preplanning and design coordination
- Increased 811 center involvement
- A formalized communication process among all affected stakeholders
- Project-specific marking agreements that address variance scenarios
- Regularly scheduled meetings of, and ongoing communication among, all involved stakeholders
- Positive response

The purposes for establishing such processes are to enhance safety and to optimize the utilization of locating resources on large/complex projects.

References:

- Georgia Utility Protection Center (GAUPC) and Georgia Utility Facility Protection Act (GUFPA)
- Pennsylvania One Call and Pennsylvania Underground Utility Line Protection Act

2-17: Electronically Locatable Lines^{68/}

Practice Statement: When designing and installing new facilities, a means is provided to allow the facilities to be electronically locatable.

Practice Description: Many facilities are damaged due to the fact that they cannot be located electronically. Non-conductive materials, such as PVC, cannot be located using traditional locate methods. When designing and installing non-conductive facilities, the use of a tracer wire or other methods (refer to practice 2-5, Markers for Underground Facilities) is part of that design and installation. This will allow these facilities to be identified, located and marked prior to future excavation activities.

References:

- NC State Statute, Article 8A 87-121 (g)

2-18: Identifying Newly Installed or Under-Construction Facilities^{70/}

Practice Statement: Facility owner or designee identifies with the 811 center an underground facility that has been installed or is under construction but is not in service.

Practice Description: A facility owner provides the 811 center with shape files or other suitable mapping data for the new or under-construction facility that follows an existing or new corridor. A new facility includes facilities installed but not placed into service.

2-19: Underground Electronic Utility Markers^{72/}

Practice Statement: Underground electronic utility markers are an effective way to enable accurate locating and verification of underground facilities. (See Appendix B: Guidelines for Underground Utility Marker Technology)

Practice Description: Facility owners/operators can consider several characteristics in the selection and installation of underground electronic utility markers for locating to ensure consistency among stakeholders' future identification. Various characteristics are included in Appendix B, Guideline for Underground Electronic Utility Marker Technology. Underground utility markers such as electronic markers (EMs), RFID markers, ball markers and magnetic markers are devices that emit a signal to assist in the location of an underground facility. Underground electronic utility markers can be used to locate and identify an underground facility in two ways: (1) the underground utility markers can emit a signal that is a match to a predefined utility type, and (2) the underground utility marker signal can carry identifying data associated with the underground utility/asset type. Underground utility marker selection and examples of frequency ranges by utility and marker type are included in Appendix B, Guideline for Underground Electronic Utility Marker Technology.

References:

- VDOT paper: Electronic RFID Marking and GPS Based Utility As-Built Mapping System
- See Practice Statement 2-5, "Markers for Underground Facilities"
- See Practice Statement 2-17, "Electronically Locatable Lines"
- Publication No. FHWA-HRT-16-019 "Feasibility of Mapping and Marking Underground Utilities by State Transportation Departments"
- Washington Gas, Engineering and Operating Standards, "Underground Plastic Pipe Location Identification"
- Consolidated Edison guideline, "Installation of electronic markers on gas mains and services"
- UGI

CHAPTER 3

811 Center



3-1: Proactive Public Awareness, Education and Damage Prevention Activities^{76/}



Practice Statement: The 811 center has a documented and proactive public awareness, education and damage prevention program.

Practice Description: The 811 center seeks opportunities to promote the need to “Call or Click Before You Dig.” All promotion is intended to enhance awareness of responsibilities to safeguard workers and the public; protect the integrity of the buried infrastructure; foster a cooperative approach between the owners of buried facilities and the excavating community toward the prevention of damage to buried facilities; and promoting its service. Typical 811 center activities include the following:

- Promotional items
- Media advertising
- Maintain a social media presence
- Participation at safety meetings
- Presentations, conferences, seminars, trade shows and other community events
- Excavator awareness and education programs
- Distribution of education material describing how the 811 system works
- Maintaining a database of active stakeholders of the local digging community
- Facilitating meetings between stakeholders
- Participation in local damage prevention or facility location and coordination committees
- Advocacy and inclusion in legislative processes

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states’ 811 centers or existing practices from stakeholders
- 811 center information
- 49 CFR Part 192
- 49 CFR Part 198
- National Transportation Safety Board (NTSB) Safety Study (NTSB/SS-97/01; PB97-917003)

3-2: Specifically Defined Geopolitical Service Area with No Overlap^{77/}



Practice Statement: The 811 centers serving a specifically defined geopolitical area are structured so that an excavator need only make one notification, and a facility owner/operator need only belong to a single 811 center per defined geopolitical area.

Practice Description: 811 programs are designed to promote ease of use for members (facility owners/operators) and excavators. Although this ease of use is enhanced when an 811 center serves a specifically defined geopolitical area that does not overlap with the service area of another 811 center’s service area, non-overlapping service areas are not essential. There are three requirements that an 811 program must meet to be considered as having implemented this best practice:

- The program permits an excavator to use a single point of contact to submit and follow up on a notice of intent to excavate and to notify affected facility owners/operators.
- The program permits a facility owner/operator to join a single 811 center and receive all appropriate notices.
- The program is designed so that all pertinent information is shared among 811 centers in the event more than one exists.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-3: Formal Agreements with Members^{78/}



Practice Statement: Each member of the 811 center abides by state/provincial statute where applicable or written agreement that states the rights and the responsibilities of the excavators, member facility owners/operators and the 811 center.

Practice Description: Operating procedures and bylaws are established. Procedures for the operation of an 811 center are adopted to ensure the timely and accurate communication of locate requests and positive response between the excavator and the member facility owner/operator. The concept is to promote service, not obstructions. Topics for procedures can be classified as general, communications, center operations, reports, expenses and public awareness. These topics can be expanded to include guidelines and whatever else is needed for a particular system. Bylaws vary, depending on the type of organization. In some instances, they may prove unnecessary. If bylaws are adopted, effectiveness is paramount. Items that can be incorporated include sections on membership (including rights), financial matters, meetings, elections and duties of officers. Any other required agreements are documented as clearly as possible to facilitate understanding by all participants. Consideration is given to include "hold harmless" clauses, amounts of liability insurance, errors and omissions insurance, retention of records, cost allocations, reimbursements, area served (with options to expand as planned), and any special arrangements necessary. If an agreement to contract the service to an outside concern is made, it contains controls, checks and balances.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- 811 Center Information
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-4: 811 Center Governance^{81/}



Practice Statement: The 811 center is governed by a board of directors representing the diverse makeup of stakeholders with a process in place for recruiting, onboarding, training and retaining board members. Board members have appropriate industry qualifications and experience, along with policy and financial authority within their own company to best benefit the 811 center and its constituents.

Practice Description: To ensure that an 811 center functions to the best benefit of the entire community, it is governed by a board of directors made up of a diverse representation of stakeholders, such as facility owners/operators, contractors, designers, project owners and government representatives. Each board member has an appropriate executive level of authority within their own company/agency and is knowledgeable in their

own industry, as well as how it interacts with the 811 center and all of the represented stakeholders. The board has a process in place for recruiting, onboarding, training and retaining board members with appropriate qualifications.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-5: Adoption of 811 Three-Digit Dialing and Single Toll-Free Statewide Telephone Number With Nationwide Access^{85/}



Practice Statement: The 811 center adopts 811 three-digit dialing and a single toll-free statewide telephone number with nationwide access.

Practice Description: 811 is used by excavators within every state in the United States to submit locate requests. In addition to 811, the center provides a toll-free number that has nationwide access, meaning that a caller can reach the center from anywhere in the country.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- 49 CFR Part 198
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-6: Hours of Operation^{55/82/}



Practice Statement: The 811 center can process locate requests 24 hours per day, 7 days per week.

Practice Description: The 811 center has a process in place where an excavator who has a locate request can, at any time of the day or night, every day of the year, contact the 811 center and have that request processed.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- 811 Center information
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-7: 811 Center Locate Request Records Retention and Retrieval^{103/}



Practice Statement: Retention of historical records by the 811 center for all data, transactions, communication, and documentation related to locate requests is performed in accordance with the 811 center's records retention policies or state's legislative requirements. Records are retained in a format which enables retrieval of related documentation of locate request activity.

Practice Description: Transaction recordings are a documentation of the events which occurred between all impacted stakeholders and the 811 center. Artifacts could include, but are not limited to, historical records of all data, transactions, communications, and other documentation related to a locate request per 811 center record retention policies or the state's legislative requirements.

A record of all elements which are required to process communications for locate requests is stored to ensure that precise documentation of the

activity is retained. The record is maintained for every contact channel which may include, but not be limited to, Voice, SMS, Chat, Email, and all ticket creation and/or processing applications. This record can be legally supported in court. The 811 center has a procedure for processing requests for records.

These records must be maintained and retrievable minimally until the applicable statute of limitations in the state/province has expired. Laws vary from state to state, so no specific retention period is set forth as a best practice.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- 49 CFR Part 198
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-8: Vacant^{104/}

3-9: Locate Information Communication^{105/}



Practice Statement: The 811 center provides the excavator, in a timely manner, with a ticket number, the names of notified facility owners/operators and detailed information regarding communication sent.

Practice Description: Providing the locate request ticket number and the names of the facility owners/operators who will be notified enhances the efficiency of the 811 process. This information can be provided over the phone and/or through electronic display or communication. When provided the names of the facility owners/operators, the excavator knows which owners/operators will be notified in the area of the planned excavation. This helps the excavator determine if all affected facility owners/operators are notified and have responded to the locate request.

The 811 center delivers a detailed record in response to the excavator's locate request. The excavator can verify accuracy of the information when provided with such a record from the 811 center. This information includes but is not limited to contact information, work type, excavation activity duration, ticket life, ticket attachments, as well as the proposed location of excavation activities.

References:

- One Call Systems International Voluntary Recognition Program
- "Model One Call for the 20th and 21st Century," AT&T (was available when the practice was created but is no longer available)
- Existing operating practices from various states' 811 centers
- 49 CFR Part 198
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)
- Colorado 811, North Carolina 811, Pennsylvania 811, et al
- BP 3-27, Electronic Positive Response
- BP 3-31, Enhanced Positive Response
- BP 4-9, Positive Response is Provided to Facility Locate Requests
- BP 5-8, Positive Response

3-10: Locate Request Records^{106/}



Practice Statement: The 811 center can provide a copy of any locate request for a period of time determined by applicable statutes.

Practice Description: The 811 center maintains its locate request records electronically for a period of time determined by applicable statutes or

retention policies. These records can be accessed in the event of a damage investigation, litigation, or other relevant event.

References:

- One Call Systems International Voluntary Recognition Program
- Existing operating practices from various states' 811 centers
- 49 CFR Part 198
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-11: Vacant^{109/}

3-12: Verification of Data Submitted by Facility Owners/Operators^{110/}



Practice Statement: The 811 center receives digital geographic information from its member facility owners/operators periodically, defining the geographic area for receiving notices. At a minimum, this includes all areas where the member has underground facilities. The 811 center requires the operator to approve their data before activation takes effect.

Practice Description: Each member owner/operator is responsible for identifying the geographic area for receiving notifications. The 811 center has a process in place to receive geographic data from its members and validate changes before they become active in the system. Updates occur and are implemented as frequently as necessary but no less than annually to ensure that all facilities are protected.

The 811 center tracks changes made by each owner/operator and can reproduce a member's service area historically for the same time period for which it retains its records. The 811 center can reproduce what each member's service area mapping was for all historical notifications, in compliance with its data retention policy.

References:

- One Call Systems International Voluntary Recognition Program
- "Model One Call for the 20th and 21st Century," AT&T (was available when the practice was created but is no longer available)
- Existing operating practices from various states' 811 centers
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)
- CGA Best Practices 2.18 and 6.4

3-13: Vacant^{111/}

3-14: Meeting Between the Excavator and Facility Operator(s) Initiated by One Call Notification



Practice Statement: The 811 center has a process for receiving and transmitting requests for meetings between the excavator and the facility operator(s) for the purpose of discussing locating facilities on large or complex jobs.

Practice Description: The 811 center relays requests for job site facility meetings with facility owners/operators to the affected facilities' owners/operators. If a meeting is required to show the limits and schedule of the work, the 811 center indicates that a meeting is requested. The 811 center requires that the excavator provide sufficient information to fully identify the boundaries of the proposed work site. A meeting request does not necessarily eliminate the need for a locate request.

References:

- Existing operating practices from various states' 811 centers
- OCSI Resource Guide 2009
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-15: 811 Center Accepts Notifications from Designers

Practice Statement: The 811 center accepts design requests and has the ability to process them as designated by the facility owners/operators.

Practice Description: To facilitate damage prevention, project designers have a need for access to facility location information from facility owners/operators. If a design request is received, the 811 center provides a listing of facility owners/operators directly to the designer. Once the list is identified, the 811 center processes the request as designated by each facility owner/operator.

References:

- Existing operating practices from various states' 811 centers
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-16: Locate Request^{114/}

Practice Statement: A locate request is a communication process between a requestor, the 811 center, and the facility owner/operator(s) for the purpose of locating underground facilities.

Practice Description: A locate request includes enough information to enable the facility owners/operators to find the location and determine if they have underground facilities in the area. The 811 center captures the following information, at a minimum, on a locate request, in accordance with state/provincial law:

- Requestor's name and contact information as required by statute
- Excavator's name and contact information as required by statute
- For whom the proposed excavation work is being done
- Specific location of the proposed excavation
- Start date and time when the work will begin
- Description of the proposed excavation work

Some 811 centers capture additional information about the dig site location as required by state/provincial law and/or center policy. This information may include but is not limited to:

- Address and/or cross street(s)
- Type of excavation activity (e.g., boring, blasting, trenching, trenchless, etc.)
- The purpose of the proposed work (i.e., what will be installed or built)
- The intended duration of the excavation
- GPS coordinates
- Highway and/or railroad milepost
- Relevant attachments (drawings, images, maps, sketches, photos, etc.)
- Additional remarks

References:^{61/115/}

- "Model One Call for the 20th and 21st Century," AT&T (was available when the practice was created but is no longer available)
- Existing operating practices from various states' 811 centers including Colorado, Iowa, North Dakota, Pennsylvania, and South Carolina
- 49 CFR Part 198
- Kansas One-Call: Excavator's Manual. "Rural Area," pg 9.

- Tennessee 811:
 - Geocall V3 CGAE.28 Rev 012813 “Latitude and Longitude Searches,” pg 1.
 - Geocall V3 CGAE.29 Rev 062713 “Latitude and Longitude Searches,” pg 1.
 - Geocall V3 CGAG.40 Rev 020413 “Latitude and Longitude,” pg 1.
 - Geocall V3 CGAG.41 Rev 020413 “Latitude and Longitude,” pg 2.
- New Mexico 811: Training Manual. 8.14 “How to Use GPS for Mapping a Ticket,” pg 1–16.
- Mississippi 811: Training Manual. “Global Positioning System/Latitude-Longitude,” pg 1.
- Hawaii One Call: ITIC User Manual. “Submit a Locate Request,” pg 16. <http://callbeforeyoudig.org/hawaii/index.asp>
- Montana One Call: ITIC User Manual. “Submit a Locate Request,” pg 16, 23. <http://callbeforeyoudig.org/montana/index.asp>
- Illinois 811: Excavators. “Information Needed”
- CGA Best Practice 5.2

3-17: Practices/Technology to Optimize Notification Areas^{116/}



Practice Statement: The 811 center employs practices and technology designed specifically to ensure the excavation site is appropriate and consistent with the owner’s/operator’s notification area.

Practice Description: The 811 center employs technology that enables the center and the facility owner/operator to determine the desired area of notification by either polygons, grids, or other geospatial designations. Technology enables the following:

- Proposed excavation site buffer which aligns with regional mapping data
- Digital acceptance of the facility owner/operator’s identification of its desired area of notification with any applicable buffer

References:

- “Model One Call for the 20th and 21st Century,” AT&T (was available when the practice was created but is no longer available)
- Existing operating practices from various states’ 811 centers including Colorado, Iowa, North Dakota, Pennsylvania, and South Carolina
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-18: Vacant^{117/}

3-19: Direct Electronic Locate^{118/}



Practice Statement: The 811 center provides users a means of direct, electronic entry of locate requests that maintain comparable ticket quality to an operator-assisted entry.

Practice Description: The 811 center has interactive data communications sufficient to permit remote data entry for members and excavators. Then, the 811 center validates the input information and allows the user to make corrections if necessary. This correction is accomplished by referencing the same geographic database used at the 811 center when taking a voice request. This process ensures that the ticket quality is maintained for all tickets.

References:

- “Model One Call for the 20th and 21st Century,” AT&T (was available when the practice was created but is no longer available)

- Existing operating practices from various states' 811 centers including Colorado, Iowa, North Dakota, Pennsylvania, and South Carolina
- NTSB Safety Study (NTSB/SS-97/01; PB97-917003)

3-20: Vacant^{119/}

3-21: Vacant^{120/}

3-22: Vacant^{121/}

3-23: 811 Center Quality Standards^{24/101/}



Practice Statement: The 811 center establishes and monitors performance standards for the operation of the center.

Practice Description:

A: Customer Quality of Service Performance Measurements

811 centers monitor the quality of service provided to a customer who submits a locate request. Key performance indicators include, but need not be limited to, average speed of answer, service level, hold time, call abandonment rate, handle time (talk time), and quality assurance. Recommendations to help to fulfill a high quality of customer service while promoting accuracy, cost effectiveness, and efficiency are identified below. Measuring performance metrics qualifies as a “best” practice.

1. Average Speed of Answer/Service Level/Hold Time

These metrics measure the amount of time it takes from a call being connected to being answered by an agent or customer service representative (CSR). Some centers include the pre-announcer menu time in this calculation.

2. Abandoned Call Rate

This measures the amount of time a caller is on hold before they hang up or disconnect. Not meeting caller expectations could lead to repeat calls, or worse, encourage callers to excavate without having an 811 notice. Callers have an expectation that all calls will be answered within a reasonable time.

3. Handle Time/Talk Time

This indicates the amount of time it takes an agent/CSR to process a call and complete any locate requests made by that caller. It may include time after the call to properly process the request. While this measures internal efficiencies, higher handle time/talk time can lead to higher levels in other areas such as average speed of answer and abandoned call rate.

The 811 center measures the amount of time each call takes at the individual CSR level. The emphasis is on both quality and efficiency to allow for difficult or complicated locate requests. Handle time may vary based on the level of ticket difficulty.

4. Quality Assurance

811 centers have a defined quality assurance program with measurable targets. The program will ensure the accuracy of locate requests that an 811 center processes. A quality assurance program has processes or standards for both voice requests and electronic/internet requests.

5. Systems Availability

811 centers measure up-time percentages for critical systems. 811 centers receive a high volume of locate requests that are processed through electronic/internet systems. High levels of availability for all systems are crucial components of a successful 811 center. Systems

availability may impact voice and electronic/internet capabilities for processing requests.

B: Notification Transmission

The 811 center establishes and monitors criteria for the transmission of notifications and notification audit reports.

The 811 center can transmit notifications in an electronic format that allows receiving stations to parse/extract data. Typically, notification transmission is immediate.

Notification audit reports are sent to receiving stations at a mutually acceptable frequency. The best practice is to send an audit report at least once every day.

References:

- One Call Systems International Voluntary Recognition Program
- “Model One Call for the 20th and 21st Century,” AT&T (was available when the practice was created but no longer available)
- Existing practices at Arizona 811, Colorado 811, Georgia 811, Iowa One Call, North Dakota One Call, and Pennsylvania 811

3-24: Web Services Solution^{17/122/}



Practice Statement: The 811 center provides a method by which a member operator can receive excavation notifications through a secure Web service that uses an accepted standard for its ticket format, such as Extensible Markup Language (XML), JavaScript Object Notification (JSON), etc.

Practice Description: In addition to all other methods and formats used by 811 centers to communicate excavation notifications to underground facility owner/operators that do not have automated ticket management systems, 811 centers also should provide a method that is consistently secure and reliable. Establishing this method within the 811 centers along with an accepted standard format such as XML or JSON satisfies this practice. Providing e-mail and/or File Transfer Protocol (FTP) communications methods alone does not satisfy this practice.

References:

- Sunshine State One Call of Florida
- Utility Protection Center of Georgia
- Dig Safely New York
- Ohio Utilities Protection Service
- Arizona 811

3-25: Identification of Unknown Lines^{15/123/}



Practice Statement: The 811 center has defined and documented procedure(s) for handling calls from excavators regarding the discovery of an unidentified line.

Practice Description: To facilitate damage prevention, 811 centers have an established procedure that is implemented when an excavator calls and reports an unidentified facility.

References:

- Policies at various 811 centers

3-26: 811 Center Membership^{22/124/}



Practice Statement: Any facility owner/operator that conveys or transports products or services by means of an underground facility is a member of the relevant 811 center.

This includes any facility that:

- Occupies or crosses a right-of-way
- Occupies or crosses a utility easement

This does not include any facility that:

- Is used exclusively to furnish services or commodities on a property for a person who is an owner or tenant of that property, such as homeowners.

Practice Description: Notifying facility owners/operators of the intent to excavate is critical to preventing damage to underground facilities. Membership in the 811 center ensures that notifications are delivered to the owners/operators and prevents damages that risk public safety and endanger excavators who are working near those facilities.

References:

- State one call laws

3-27: Electronic Positive Response^{46/}



Practice Statement: The 811 center provides a method for facility owners/operators to electronically post their positive response status to a notice of intent to excavate.

Practice Description: By hosting an electronic positive response system, the 811 center provides facility owners/operators the best means to communicate the status of their response to a notice of intent to the person initiating the notice.

References:

- BP 4-9 Positive Response Is Provided to Facility Locate Requests
- Existing practice in Arizona, Colorado, Delaware, Florida, Georgia, Iowa, Maryland, Michigan, New Jersey, New Mexico, North Carolina, Ohio, Pennsylvania, Tennessee, Virginia, West Virginia, and Washington, D.C.

3-28: 811 Center Data^{53/107/}



Practice Statement: All 811 centers annually submit their ticket and transmission volumes to the OCSI Data Collection Tool.^{53/}

Practice Description: Ticket and transmission volumes from the One Call Systems International (OCSI) data collection tool are shared with the Damage Information Reporting Tool (DIRT) to make a correlation between 811 center ticket and/or transmission volume to damages or events that have occurred. Many 811 centers currently provide this data to the OCSI data collection tool. Receiving ticket and transmission volumes from all 811 centers allows all stakeholders to review, on a national level, more accurate projections and to determine the cause and possible solutions for damages to subsurface installations.

References:

- All 811 and one call centers throughout the United States and Canada currently participate in data sharing with the OCSI Data Collection tool.

3-29: 811 Center Locate Request Size and Scope^{54/}

Practice Statement: A maximum locate request area that is appropriate for a proposed excavation site is defined for a facility locate request.

Practice Description: Designating a manageable locate request size (work area size/scope) along with clear locate instructions will reduce uncertainty and provide clarity to the utility operators and/or locators as to “what” and “where” needs to be located and marked. This is designed to prevent unnecessary locator effort and allow adequate time to locate and mark the affected underground facilities within the time frame and marking requirement of the appropriate state statute.

References:

- Existing state laws, including Georgia, Indiana, Pennsylvania and South Carolina (as examples)

3-30: Vacant^{108/}**3-31: Enhanced Positive Response^{66/}**

Practice Statement: Enhanced Positive Response is utilized, where available, to provide additional information to the excavator about a performed locate.

Practice Description: This information provided to the excavator, prior to excavation, will help the excavator know more about the utilities and job site prior to dispatching resources to excavate. With this additional information, the excavator will be able to plan the excavation to reduce damage to underground utilities.

This communication may include documentation and any other information that will promote safe excavation, including details about the locate and the facility owner.

It is a common practice for utility operators and contract locators to capture the enhanced information about locates that are performed in response to 811 centers' requests.

Sharing this enhanced information with the excavator, prior to excavation, will help to reduce damage to underground facilities and provide clarification of the location of each utility.

References:

- A pilot program was successfully implemented in 2014 in Montgomery County, MD. The success of the pilot program encouraged utilization of the EPR throughout Washington Gas distribution system. Beginning May 2015, there have been over 1,000,000 EPR packages provided system-wide.
- The proposed practice enhances Locating and Marking BP 4.9 and 4.13. The proposed EPR will provide support for Excavation BP 5.8, 5.10, 5.11, 5.13, and 5.14.
- EPR is in use as a daily process by Washington Gas', UtiliQuest and Miss Utility (OCC) 811 center for all locate requests in Washington, D.C. and MD.

3-32: Communicate Potential for Privately-Owned Facilities



Practice Statement: The 811 center educates individuals submitting a locate request that privately owned and operated service lines/facilities may exist. Owners/operators of those private service lines/facilities who are not members of the 811 center will not be notified.

Practice Description: The purpose of this practice is to make the individual submitting a locate request aware that the 811 center will notify only its members who are obligated to respond. Buried private service lines/facilities that are owned and operated by nonmembers may be present and will not be located.

Best Practice 4-21 in the Locating and Marking chapter recognizes the practice and the obligation of operators to locate and mark their service lines/facilities connected to main lines/facilities.

Practices outlined in Best Practices 2-3 and 2-14 in the Planning and Design chapter should identify public and private lines/facilities at the design phase. The locations of those lines/facilities should be verified and documented before the construction phase.

Entities and individuals who are not members of the 811 center and are not in the business of providing a product or service with service lines/facilities will not be notified. The 811 center explains to individuals requesting a locate or to visitors to their websites that private service lines/facilities may exist and will not be located.

References:

- Arizona 811, Colorado 811, Kentucky 811, Pennsylvania 811, Mississippi 811, Gopher State One Call, Georgia 811, Illinois One Call

CHAPTER 4

Locating and Marking



4-1: Available Records



Practice Statement: Locators use available facility records at all times.

Practice Description: Facility locators use available records at all times. Facility records indicate approximate location, number of facilities and access points for buried facilities within a requested area. The use of facility owner/operator-supplied records is an effective method of identifying facilities as part of the locating process.

4-2: Corrections and Updates



Practice Statement: If a facility locator becomes aware of an error or omission, then the facility locator provides information for updating records that are in error or for adding new facilities.

Practice Description: During the course of a locating activity, a locator may become aware of errors or omissions. Methods are in place to notify a facility owner/operator of that error or omission. The corrections are submitted to the appropriate person or department in a timely manner. The method of notification is determined by the facility owner/operator and includes the following information:

- Name (and company if contracted)
- Contact phone number of the individual(s) submitting the change
- Location (either address or reference points)
- Size and type of facility
- Nature of the error or omission
- Sketch of the change in relation to the other facilities

Omissions and errors may occur as a result of misdrawn records, changes during construction at the job site, repair or abandonment of facilities, and delays in posting new records. Failure to note errors or omissions when found could result in damages to the facility at a later date. The 1994 NTSB Excavation Damage Prevention Workshop stated that “facility operators should be required to update maps when excavation finds errors in the mapping system.”^{1/}

4-3: Color Code



Practice Statement: A uniform color code and set of marking symbols is adopted nationwide.

Practice Description: A national standard is adopted defining color specifications relevant to facility type and marking symbols for identifying facilities. (See Appendix B, “Uniform Color Code and Marking Guidelines.”)^{9/} The December 1997 NTSB safety report cites the use of the APWA/ Utility Location and Coordination Council (ULCC) color code as the model example.

4-4: Vacant^{83/}

4-5: Locator Training



Practice Statement: Locators are properly trained. Locator training is documented.

Practice Description: Minimum training guidelines and practices are adopted for locator training. These guidelines and practices include the following:

- Understanding system design/prints/technology
- Understanding construction standards and practices for all types of facilities
- Equipment training and techniques
- Plant recognition training
- Theory of locating
- Daily operations
- Facility owner/excavator relationships and image
- Safety procedures per Occupational Safety and Health Administration (OSHA) regulations/federal, state/provincial and local laws
- Written and field testing
- Field training
- Annual retesting

The National Utility Locating Contractors Association (NULCA) Locator Training Standards and Practices^{2/} represent an accepted model within the locate industry. Documentation of all training is maintained to ensure that facility locators have been properly trained.

4-6: Safety



Practice Statement: Locates are performed safely.

Practice Description: It is the responsibility of the owner/operator and locator to establish when and how the underground facility will be identified. All hazards associated with performing a locate are identified. Appropriate measures conforming to federal, state/provincial, local and industry standards are established. Employees are made aware of these hazards and are properly trained in worker safety standards.

A: Pre-Work Safety Considerations

- 1: Site Background Data. Site information is gathered to determine hazards, exposures and/or other potential safety problems that might be encountered in connection with on-site locate work. This information may be gathered from the facility records and from visual inspection.
- 2: Site Familiarization. Site characteristics that could affect locate work are analyzed. Areas to be considered include the following:
 - a: Obstructions. The site is analyzed to determine if physical obstructions are present on the property that would make locate work unsafe. Means for working around such obstructions are defined.
 - b: Traffic. Vehicular arteries (e.g., highways, roadways, railways, etc.) at the work site are identified to determine whether such traffic would pose any safety hazard to locating the site.
 - c: Physical Site Conditions. Soil conditions and other factors (e.g., trenches, pits, bores, standing water, etc.) that could affect the safety of the job site are identified. Methods are developed to identify and safely work around these hazards.

- 3: External Resources. Information is gathered about safety-related resources that might be required in the event of an accident or other problem (such as an employee illness). Information needed includes location and contact information for the nearest hospital, fire department, police department and any other public emergency response organization. In addition, access routes and travel plans to emergency response facilities are defined.
 - 4: Work Plan. A work plan in which procedures, employee roles, equipment requirements, time requirements and other factors are considered is developed to define the most efficient means for safely accomplishing required locate work. This work plan considers all of the safety related information developed in connection with paragraphs 4-6.A.2 and 4-6.A.3.
 - 5: Job Briefing. Information developed as discussed in paragraphs 4-6.A.1 through 4-6.A.4 is used to conduct a job briefing prior to commencement of on-site locate work. The job briefing focuses on safety aspects of the required work.
- B: Locate Work Safety Considerations
- 1: Personnel Protection. Watchman/lookout capabilities are provided to ensure the safety of personnel in cases where locate work requires that working individuals disrupt traffic flow or otherwise occupy hazardous positions. All working individuals wear proper safety attire. Such attire provides for adequate visibility of the worker and personal protection against hazards.
 - 2: Equipment. All equipment used in connection with locate work is suitable for the intended uses. Items such as ladders, electrical test devices, and other instruments and items are inspected from a safety perspective prior to use. Safety features such as locking devices, grounding, insulation, etc., are thoroughly inspected.
 - 3: Exposures. In cases where locate work requires personnel to enter into spaces with potentially unsafe conditions, appropriate testing is accomplished prior to entry. During times when such spaces are occupied, adequate monitoring and/or ventilation devices are present and properly operating during occupancy.
 - 4: Work Activities. All locate work activities are conducted with safety given first priority. All employees are thoroughly trained and briefed regarding safety measures such as minimizing exposures to potentially hazardous conditions, avoiding unnecessary risks, and giving priority to personal safety.
- C: Post-Work Safety Considerations
- 1: Termination of Work Activities. After locate work is completed, the site is restored and left in such a condition that no safety hazards associated with the locate work activities remain. All personnel and equipment used in connection with the work are accounted for, and no unsafe conditions remain at the site. Any safety related equipment used in connection with the work is returned/restored to pre-work status.
 - 2: Debriefing. After completion of locate work, a debriefing safety review of work activities is conducted. The review looks at the safety aspects of all applicable work practices to determine if unnecessary exposures may have occurred and where improvements could be made.

4-7: Visual Inspection

Practice Statement: A visual inspection is completed during the facility locating process.

Practice Description: This inspection includes the following:

- All facilities within a facility owner/operator's service area (to evaluate the scope of the locate request)
- Identification of access points
- Identification of potential hazards
- Assurance that plant facilities shown on records match those of the site

A visual inspection helps determine if there are facilities placed that are not on record. It is very important that visual inspections be completed in areas of new construction, where records may not indicate the presence of a facility. The visual inspection is necessary because the time between placing a facility in the field and placing it on permanent records varies by facility owner/operator and location. Evidence of a facility not on record includes, but is not limited to, poles, dips, enclosures, pedestals (including new cables found within the pedestals), valves, meters, risers and manholes.

4-8: Temporary Facility Markings^{125/}

Practice Statement: Facilities are adequately marked for conditions.

Practice Description: Facility locators match markings to the existing and expected surface conditions. Temporary marking mediums may include one or any combination of the following methods: paint, chalk, flags, stakes, whiskers, or offsets. All marks extend a reasonable distance beyond the bounds of the requested area. Proper training for all facility locators includes properly identifying the varying surface and environmental conditions that exist in the field and what marking methods should be used. Conditions that may affect markings are rain, snow, vegetation, high traffic, construction, etc.

Offset markings are considered if site conditions make it difficult or impractical to adequately mark or maintain the centerline of the underground facility. When using offset marks, they are used in conjunction with marks placed over the facility, when practicable. All marks are to be placed in accordance with the APWA's color codes.

To the extent that there are questions or need for additional information related to the locate marks, either party (excavator or locator) may communicate with the other party either directly or through the 811 center where available. This additional communication can be made by any reasonable manner including, but not limited to, face-to-face, phone, or electronic means.

See Appendix B, Uniform Color Code and Marking Guidelines, for further details.

References:

- CGA Best Practice 5.8

4-9: Positive Response to Locate Request

Practice Statement: Positive response is provided to facility locate requests.

Practice Description: All facility locate requests result in a positive response from the facility owner/operator to the excavator. A positive response may include one or more of the following: markings or documentation left at the job site, callback, fax or automated response

system. A positive response allows the excavator to know whether all facility owners/operators have marked the requested area prior to the beginning of the excavation.

4-10: Marking Multiple Facilities in the Same Trench



Practice Statement: Multiple facilities in the same trench are marked individually and with corridor markers.

Practice Description: In general, the number of lines marked on the surface equals the number of lines buried below. In circumstances where the total number of lines buried in the same trench by a single facility owner/operator may not be readily known, a corridor marker is used. The corridor marker indicates the width of the facility. (See Appendix B, “Uniform Color Code and Marking Guidelines.”)^{20/}

4-11: Abandoned Facilities



Practice Statement: Information on abandoned facilities is provided when possible.

Practice Description: When the presence of an abandoned facility within an excavation site is known, an attempt is made to locate and mark the abandoned facility. When located or exposed, all abandoned facilities are treated as live facilities. Information regarding the presence or location of an abandoned facility may not be available because of updating or deletion of records. In addition, abandonment of an existing facility, damage to an abandoned facility, or limited or non-existing access points may render an abandoned line non-locatable. It should be emphasized that recommendation of this practice is not an endorsement of the maintenance of records for abandoned facilities.

4-12: Locating Electromagnetically



Practice Statement A: When locating electromagnetically, active/conductive locating is preferable to passive/inductive locating.

Practice Description: The preferred method of actively applying a signal onto a facility is to use direct connection. Direct connection is the process of connecting a direct lead from the transmitter to the target facility and connecting a ground lead from the transmitter to a ground point to complete a circuit. This process provides the strongest signal on the line and is less likely to “bleed over” to adjacent facilities than other methods of applying a signal. This method allows a greater range of frequency and power output options. It is good practice to use the lowest frequency possible at the lowest power output possible to complete the locate. If direct connection is not possible, use of an induction clamp (coupler) is the most effective method of applying a locate signal onto the target conductor. This method is more limiting for the choices of frequency and power outputs than direct connection. Using an induction clamp is not as effective at transmitting a signal as direct connection, can only be used within certain frequency ranges, and must use a higher power output. The least-preferred method is induction or broadcast mode on a transmitter. This usually results in a weak signal that will “bleed over” to any conductor in the area.

Practice Statement B: When electromagnetic locating is not possible, radar-based technologies can be used.^{10/}

Practice Description: In cases where non-conductive utilities cannot be located using electromagnetic means, radar-based methods such as ground penetrating radar and associated technologies can be used to determine the location of such utilities. It is important to note that

these technologies are not applicable in all areas or conditions, because conductive soils and materials obscure radar signals. Users of these technologies should have the degree of knowledge and training required to operate the associated equipment and/or to interpret the results. Applicable radar frequencies range from 200 MHz to 900 MHz, where higher frequencies provide higher resolution but shallower depth of penetration.

4-13: Facility Owner/Operator Identification



Practice Statement: The facility owner/operator is identified.

Practice Description: When feasible, the owner/operator of a facility is identified by markings at the time the facility is located. This practice facilitates a positive response for all facilities within the requested area. (See Appendix B, "Uniform Color Code and Marking Guidelines.")

4-14: Communication Between Parties



Practice Statement: Communication is established between all parties.

Practice Description: 811 centers, facility owners/operators and excavators all have clearly defined processes to facilitate communication between all parties. If the complexity of a project or its duration is such that a clear and precise understanding of the excavation site is not easily conveyed in writing on a locate request, then a pre-location meeting is scheduled. This pre-location meeting is on-site to establish the scope of the excavation. Written agreements between the excavator(s) and the locator(s) include the following information:

- Date
- Name
- Company
- Contact numbers for all parties
- A list of the areas to be excavated
- A schedule for both marking and excavating the areas
- Any follow-up agreements that might be necessary

Any changes to the areas that are to be located are in writing and include all parties responsible for the excavation and marking of the excavation sites. Locators also schedule meetings if the complexity of the markings requires further explanation.

4-15: Documentation of Work Performed



Practice Statement: Documentation of work performed on a locate is maintained.

Practice Description: A facility locator always documents what work was completed on a locate request. This assists in the locate process by requiring a locator to review what was located and then to verify that all facilities within the requested area were marked. Careful documentation helps ensure that there is an accurate record of the work performed by the locator and helps eliminate confusion over what work was requested by the excavator.

4-16: Damage Investigation



Practice Statement: A damaged facility is investigated as soon as possible after the occurrence of damage.

Practice Description: Anytime a damage occurs, a proper investigation is performed to determine not only the responsible party but also the root cause of the damage. The information gathered from damage investigations is essential in preventing future damages.

4-17: Forecasting/Planning for Workload Fluctuations^{84f}



Practice Statement: A plan including an annual forecast, quarterly review, weekly/monthly engagement, or another agreed-upon frequency is developed to manage ticket volume and locate workload fluctuations.

Practice Description: Facility owners/operators and/or their representatives develop methods to sufficiently forecast and plan for future workloads so that ticket requests may be completed on time. This best practice ensures that adequate personnel and equipment are available to complete all locate requests.

4-18: Quality Assurance



Practice Statement: Underground facility owners/operators have a quality assurance program in place for monitoring the locating and marking of facilities.^{7f}

Practice Description: The process of conducting audits for locates is a critical component to the protection of underground facilities. The recommended components listed below are assembled from multiple sources and are meant to provide general guidelines for auditing the work of locators.

Components:

- A: Conduct field audits and choose some locations to be audited/surveyed purely at random.
- B: Check accuracy to within, governed, contractual and minimum tolerance levels.
- C: Measure timeliness, as defined by regulation/statute.
- D: Check completion of a request.
- E: Check evidence of accurate and proper communication.
- F: Check that proper documentation exists.
- G: Check that an audit/survey is documented.
- H: Communicate results to applicable personnel.
- I: Trace audits for trend analysis.
- J: Verify proper hook-up and grounding procedures where applicable.
- K: Verify the reference material used to document that the locate was up to date (electronic plans or paper plans).
- L: Verify that appropriate safety equipment and procedures were used by the locator.
- M: Verify that tools and equipment are in proper working order and properly calibrated.

References:

- Health Consultants Incorporated; Central Locate Services, LTD; Great Plains Locating, ATCO Gas; Utiliquist

4-19: Trenchless Excavation^{13/}

Practice Statement: All stakeholders adhere to all best practices and the general guidelines stated in the following practice description prior to, during and after any trenchless excavation (as applicable).

Practice Description: Locate in the area of the entrance pit the trenchless excavation path and the exit pit when trenchless excavation is being used. (For additional Information, refer to Practice Statements 2-13 and 5-29.)

References:

- See Appendix D

4-20: Locating and Marking in Waterways**A: Permanent Markers for Underwater Facilities^{12/126/}**

Practice Statement: Due to the risk of excavation damage, permanent markers are placed as close as practicable at the entrance and exit points of submerged and/or submersed facilities.

Practice Description: Permanent markers are used by underwater facility owners (e.g., cable, telecommunication, electric, water, sewer, and oil/gas pipelines, etc.) to indicate the presence of a submerged and/or submersed facility in the area. This is due to the large variety of excavating activities (e.g., dredging, bridge construction, anchors, directional boring, and other activities) that can damage these facilities. The proper placement and maintenance of permanent markers raises the awareness of submerged and/or submersed facilities and reduces the risk and likelihood of damage.

Markers for submerged and/or submersed facilities are in accordance with applicable laws and regulations. For facility types where there are no applicable laws and/or regulations, warning language such as “Do Not Anchor or Dredge,” facility type, name, and 24/7 contact number of the facility operator are recommended.

Marking of facilities that enter, exit or pass beneath a body of water smaller than those defined as “waterway” should be in accordance with Best Practice 4-3 (Color Code) and 4-8 (Facility Marking) associated with buried facilities. This marking should be up to the edge(s) of the smaller body of water.

Benefits:

- By alerting excavators to the presence of submerged and/or submersed facilities, permanent shoreline markers provide additional protection to the excavators, facilities, environment, and the public.
- By alerting vessel operators to the presence of submerged and/or submersed facilities, permanent shoreline markers provide additional awareness in the event a vessel decides to drop anchor, ground or spud.

References:

- Tennessee Gas: 1995 Procedures, Sunshine State One Call of Florida, State of California Code, State of Delaware Code, State of Alabama Code, State of Mississippi Code

B: Temporary Markers for Underwater Facilities^{14/}

Practice Statement: Temporary markers are placed within the areas of proposed excavations as close as practical over facilities that are submerged in bodies of water where facilities are at risk of being damaged without impeding or creating additional hazards.

Practice Description: The technology used to locate and mark the submerged facility is dependent upon the size of the facility, depth of water, material composition of the floor, and the depth the facility is positioned in or on the floor of the body of water. Temporary markers such as buoys, poles or PVC markers are used by underwater facility owners to indicate the presence of an underwater facility in the area. At times these markers may be supplemented with mapping, GPS coordinates and/or fixed high-bank marks. There are many excavating activities, such as dredging, bridge construction, setting of anchors and directional boring, that can damage underwater facilities. The proper placement of visible temporary markers raises the awareness of these facilities and reduces likelihood of damage. Communication between stakeholders is initiated through the 811 center to reduce potential conflicts. It is critical for stakeholders to maintain communication throughout the excavation to ensure the safe and successful completion of the project. Placement and removal of temporary markers for underwater facilities follow local, state, and federal laws and regulations.

Benefits:

- By alerting excavators to the presence of underwater facilities, temporary markers provide additional protection to excavators, facilities and the public.

References:

- Sunshine State One Call of Florida, State of California Code, State of Delaware Code, State of Alabama Code, State of Mississippi Code

4-21: Service Lines^{34/}



Practice Statement: A service line is marked in response to a locate request to the operator who uses the service line to pursue a business that derives revenue by providing a product or service to an end-use customer via the service line. A service line is marked in response to a locate request to a governmental entity that provides a product or service to an end-use customer via the service line.

Practice Description: A service line is a type of underground facility that is connected to a main facility. The service line is used by the following entities:

- An operator who provides a product or service within a right-of-way, an easement, or an allowed access to or through private property while pursuing a business that generates revenue by providing a product or service to an end-use customer (other than another operator of like kind or themselves).
- A governmental entity that provides a product or service via that service line.

The operator or the governmental entity locates and marks these service lines within the bounds of the locate request up to either 1) the point of their operational responsibility, 2) the point the service line enters a building, or 3) where the access to locate the line terminates, as designated by the prevailing law.

References:

- South Dakota Attorney General's official opinion 8/11/08
- Minnesota DPS Rule Ch 7560 – 5/31/05
- Colorado appellate court case: Wycon Construction Co. v. Wheat Ridge Sanitation District, 870 P.2d 496 (Ct. App. Col. 1994)
- Leon County, FL, County Court Case No. 03-SC-6827, Mitchell Properties, Ltd. V. Cornerstone of North Florida, Inc. v. City of Tallahassee
- Oregon PUC Ruling 5/1/98
- State One Calls laws: AZ, GA, MN, OH, PA

4-22: Marking Newly Installed Facilities^{42/}

Practice Statement: Facility operators ensure that new facilities in areas with continuing excavation activity are marked upon installation to indicate their presence.

Practice Description: In areas of continuing excavation, newly installed facilities can be damaged and safety can be compromised if the facilities are not marked. Marking facilities upon installation gives notice to other excavators of the newly installed facilities that may not otherwise be marked in response to a notice of intent to excavate.

References:

- CenterPoint Energy/Minnesota, Michels Construction, WE Energies/Wisconsin

4-23: Trouble Locate (Unlocatable) Resolution Protocol^{98/}

Practice Statement: The operator has a trouble locate resolution protocol that emphasizes the timely and accurate completion of the trouble locate request with communication between the parties and documentation of actions taken.

Practice Description: The practice is intended to be applied in cases where upon initial arrival at the location, the tolerance zone for an existing facility cannot be established with confidence consistent with the operator's compliant mark out criteria.

In this scenario the locate entity/operator:

- Applies any initial locate protocols available to them that may result in establishing the tolerance zone and placing markings to avoid unnecessary escalation.
- After exhausting initial trouble locate protocols, and prior to the required marking date, escalates the trouble locate internally for advanced/enhanced resolution measures, i.e., vacuum truck, line tracer, ground penetrating radar (GPR), in-line 3D gyro mapping technology, etc.
- Attempts to make direct contact with the excavator (cell phone, text, email) and documents the method and message. If a specific interim positive response code is available or comments can be placed in the 811 center system, share why the locate cannot be completed, along with contact information.
- Designates the trouble locate area consistent with their procedures and uses paint, flags or other methods that distinguish the specific trouble area from the locatable areas.
- Prioritizes the completion of the trouble locate and maintains communication with the excavator until resolved. In this communication, the operator should warn of any unique or elevated risk associated with the unlocatable facility (high pressure gas, high voltage electric, high-density fiber, etc.).
- Operator makes the appropriate records/mapping corrections, and when feasible takes action to make the facility locatable going forward (tracer wire, electronic marker system/marker balls, etc.).
- Completes the appropriate positive response in jurisdictions that provide that option.

This practice does not relieve an owner/operator, responding to a valid 811 center notification, from complying with existing statutory language regarding the notification and response time, but rather provides supplemental tools to reduce damage potential and maintain excavator productivity.

Benefits: Enhances communication and documentation between the parties, keeps the excavator working in non-trouble areas when applicable, improves operator's facility records, and reduces damages to at-risk facilities that could otherwise cause a delay.

References:

- Existing practice by Southwest Gas operating in Arizona, California, and Nevada; UGI Utilities, Inc., operating in Pennsylvania and Maryland; NiSource operating in Indiana.

LEFT BLANK INTENTIONALLY

CHAPTER 5

Excavation

 811 Center  Facility Owner  Excavator  Locator  Project Owner  Designer

5-1: 811 Facility Locate Request^{91/}



Practice Statement: The excavator requests the location of underground facilities at each site by notifying the facility owner/operator through the 811 center. Unless otherwise specified in state/provincial law, the excavator contacts the 811 center and requests an excavation start date, which is to be at least two full working days, but not more than fourteen full working days, from the date of notice to the 811 center.

Practice Description: Currently 50 states and 5 Canadian provinces have one call legislation and/or established 811 centers recognizing that excavation performed without prior notification poses a risk to public safety, excavators, and the environment, and can disrupt vital services provided by facility operators. Increased participation in this one call system provides for improved communication between excavators and facility operators necessary to reduce damage.

References:

- Existing state laws, including Ohio and West Virginia

5-2: Delineate Area of Proposed Excavation^{67/79/}



Practice Statement: The excavator delineates the area of proposed excavation **by one or a combination of the following methods:**

- 1: Electronic white lining (where available through the 811 center)
- 2: On-site pre-marking, also known as white lining, with white paint, flags, stakes, whiskers and/or other locally accepted methods {See Appendix B}
- 3: Clear description of the proposed excavation site on the locate ticket

Practice Description: A clearly delineated proposed work area allows facility owners/operators and locators to avoid unnecessary work created by locating facilities that are not affected by the planned excavation, and ensure that underground facilities within the intended work area are well marked. Electronic white lining provides a method where excavators may indicate their defined dig area visually by electronic data entry (lines or polygons) without the need for a physical site visit. Pre-marking, on-site and/or electronically, allows excavators to accurately communicate to the 811 center facility owners/operators, or their locator where excavation is to occur.

References:

- Existing state laws, including California, Missouri, New Jersey and others
- Lambert's Cable Construction, LLC and UtiliQuest, LLC; Verizon Fios drop placement process in VA, MD and DC
- One Call Concepts; Internet Ticket Processing (ITIC) — excavation polygon feature to define entire proposed excavation areas
- Virginia Pilot Project; Phase I — Electronic White Lining Study

5-3: Locate Reference Number

Practice Statement: The excavator receives and maintains a reference number from the 811 center that verifies that the locate was requested.

Practice Description: All calls from excavators processed by the 811 center receive a unique message reference number, which is contained on all locate request messages. The excavator records this number; it is proof of notification to the members. The computer-generated request identifies the date, time and sequence number of the locate request. Each locate request ticket (notification) is assigned a unique number with that 811 center, the requestor and the facility owner/operator. This number distinguishes this ticket from all other tickets so that it can be archived and retrieved upon request to provide the details of that request only.

References:

- Existing state laws, all 50 states have 811 centers and/or state statutes
- Existing operating procedures from various state 811 centers

5-4: Pre-excavation Meeting

Practice Statement: When practical, the excavator requests a meeting with the facility locator at the job site prior to marking the facility locations. Such pre-job meetings are important for major, or unusual, excavations.

Practice Description: The meeting facilitates communications, coordinates the marking with actual excavation and ensures identification of high-priority facilities. An on-site pre-excavation meeting between the excavator, facility owners/operators and locators (where applicable) is recommended on major or large projects. This includes projects such as road, sewer, water or other projects that cover a large area, that progress from one area to the next, or that are located near critical or high-priority facilities. Such facilities include, but are not limited to, high-pressure gas, high-voltage electric, fiber-optic communication, and major pipe or water lines.

References:

- Existing insurance carrier guidelines
- Existing practice among excavators, including Pauley Construction and W.F. Wilson & Sons, Inc.

5-5: Facility Relocations

Practice Statement: The excavator coordinates work that requires temporary or permanent interruption of a facility owner/operator's service with the affected facility owner/operator in all cases.

Practice Description: Any temporary or permanent interruption requires the active participation by the facility owner/operator and the excavator to ensure protection of facilities through a joint preplanning meeting or conference call. 811 centers note on the ticket any special contractor requests for a joint meeting that require the facility owner/operator to initiate the process.

References:

- Existing practice among 811 centers

5-6: Separate Locate Requests

Practice Statement: Every excavator on the job has a separate one call reference number before excavating.

Practice Description: There are often several excavators on a job site performing work. The construction schedule may dictate different types of work requiring excavation from different specialty contractors simultaneously. In these situations, it is imperative for each excavator to obtain a one call reference number before excavation to ensure that the specific areas have been appropriately marked by any affected underground facility owner/operator.

References:

- Existing state laws, including Ohio, Kansas, Michigan, Maryland, Illinois and others

5-7: 811 Center Access (24/7)



Practice Statement: The excavator has access to an 811 center 24 hours per day, 7 days a week.

Practice Description: Utilities service the public needs 24/7 and thus should be protected during that same time. Certain conditions may exist that require excavators to work during off-hours (city/road congestion, off-peak utility service hours). Although most excavators are on the job site during regular work hours, they need to be able to call in future work locations after 5 p.m. This allows them more flexibility to schedule work and to avoid peak hours of locate requests at the 811 center.

References:

- Existing states laws, including Texas, Idaho, Minnesota, Pennsylvania and others (25 participating states or 811 centers with 24/7 access)

5-8: Positive Response^{94/}



Practice Statement: The 811 center notifies the underground facility owner/operator of the proposed excavation area within the time specified. The owner/operator notifies the excavator/contractor of the status of the ticket by providing an electronic positive response through the 811 center.

Practice Description: Once a facility owner/operator marks the location of existing facilities in the proposed excavation area or determines that excavation or demolition is not in conflict with any of its existing underground facilities, it notifies the excavator of the status of the ticket by appropriate response code through the 811 center's positive response system. In addition to positive response, additional communication may be made by any reasonable manner including, but not limited to, face-to-face communications, phone or other electronic means.

The excavator reviews positive response from the notified owner/operator on the ticket before beginning excavation. If an excavator identifies or has knowledge of the existence of an unmarked underground facility, the excavator notifies the 811 center that a conflict exists. Better communication between the excavator and the facility owner/operator is required as an area of excavation becomes more crowded with new underground facilities.

When the excavator makes the request to the 811 center, the excavator is informed which facility owners/operators will be notified. The excavator reviews all positive responses and compares these to the list of all owner/operators notified on the ticket prior to beginning excavation. Upon review, the excavator notifies the 811 center of any discrepancy between the positive responses and the field conditions.

References:

- Existing state laws, including California, Maryland, Nevada, and others
- Existing operating procedure for various 811 centers (over 40 participating states or 811 centers)

5-9: Facility Owner/Operator Failure to Respond^{92/}

Practice Statement: If the facility owner/operator fails to respond to the excavator's timely request for a locate (e.g., within the time specified by state/provincial requirements) or if the facility owner/operator notifies the excavator that the underground facility cannot be marked within the time frame and a mutually agreeable date for marking cannot be arrived at, then the excavator re-notifies the 811 center. Once positive response is received from all operators, or if the appropriate waiting period as defined by state/provincial law has lapsed, the excavator may proceed with excavation, provided the excavator exercises due care in all endeavors.

Practice Description: The facility owner/ operator and the excavator partner together to ensure that facilities are marked in an acceptable time frame to allow for underground facility protection.

References:

- Existing state laws, including Ohio, Kansas, South Carolina, Michigan, California, Pennsylvania and others

5-10: Locate Verification^{93/}

Practice Statement: Prior to excavation, excavators verify that they are at the correct location, verify locate markings have been performed by facility owners/operators who have responded as "marked," and, to the best of their ability, check for unmarked facilities.

Practice Description: Upon arrival at the excavation site and prior to beginning the excavation, an excavator does the following:

- Verifies that the dig site matches the 811 request and that the waiting period has ended as defined by state/provincial law.
- Verifies all facility markings are in agreement with the positive responses.
- Checks for any visible signs of underground facilities, such as pedestals, risers, meters, and new trench lines.
- Checks for any facilities that are not members of the 811 center and contacts responsible parties to request their assistance for locates.

Use of a pre-excavation checklist is recommended by insurers and practiced by responsible excavating contractors.

References:

- Existing practice by excavators, including Pauley Construction, Charge EPC, Inc., and W.F. Wilson & Sons, Inc.
- CGA Best Practice 4-21

5-11: Documentation of Marks

Practice Statement: An excavator uses dated pictures, videos or sketches with distance from markings to fixed objects recorded, to document the actual placement of markings.

Practice Description: In most situations when underground facilities are not properly marked, excavators have no way of knowing where underground utilities are located. If locate markings are adequately documented through the use of photographs, video tape or sketches before excavation work begins, it is easier to resolve disputes if an underground facility is damaged as a result of improper marking, failure to mark, or markings that have been moved, removed or covered. It is important for excavators and locators to document the location of markings before excavation work begins. The primary purpose of this best practice is to avoid unnecessary litigation and expensive legal fees for all parties involved.

References:

- Existing practice by excavators, including Pauley Construction

5-12: Work Site Review with Company Personnel

Practice Statement: Prior to starting work, the excavator reviews the location of underground facilities with site personnel.

Practice Description: Sharing information and safety issues during an on-site meeting between the excavator and the excavating crews helps avoid confusion and needless damage to underground facilities.

References:

- Existing practice by excavators, including Pauley Construction, A&L Underground, and W.F. Wilson & Sons, Inc.

5-13: 811 Center Reference at Site^{69/}

Practice Statement: Except in case of an emergency, the excavator at each job site has available a complete description of the dig site, a list of the facility owner members impacted at that dig site as identified by the 811 center, and the 811 center ticket number.

Practice Description: The availability of locate request details on site is useful because excavators can easily access information about the location and extent of work, the valid start time and the list of operators notified. The documentation also provides an excavator with appropriate information for daily tailgate meetings for crews, provides quick references for excavation equipment operators, and facilitates communications between the excavator and the 811 center with respect to that particular locate request, should it become necessary. When multiple crews are working on the same project at separate locations or when different employers have crews working at the same location, each crew has the information.

References:

- Existing state regulations, including Michigan DOT

5-14: Contact Names and Numbers

Practice Statement: The excavator's designated competent person at each job site has access to the names and phone numbers of all facility owner/operator contacts and the 811 center.

Practice Description: Situations arise on the job site that require immediate notification of the facility owner/operator, 811 center or local emergency personnel. To avoid costly delays, the excavator ensures that the designated job site personnel have all appropriate names and phone numbers. If telephone communication is unavailable, radio communication to the "home office" is available so that timely notification can be made. The "home office" also has immediate access to all appropriate names and telephone numbers.

References:

- Existing state regulations, including Michigan DOT

5-15: Facility Avoidance^{89/}



Practice Statement: The excavator uses reasonable care, such as potholing and other safe excavation practices, to avoid damaging underground facilities. The excavator plans the excavation so as to avoid damage or to minimize interference with the underground facilities in or near the work area.

Practice Description: Foremost on any construction project is safety. Excavators using caution around underground facilities significantly contribute to safe excavation of existing facilities.

References:

- Existing state laws, including Kansas, Ohio, West Virginia and others

5-16: Federal and State Regulations



Practice Statement: The excavator complies with all applicable federal and state/provincial safety regulations, and, when required, provides training as it relates to the protection of underground facilities.

Practice Description: Although most existing state/provincial damage prevention legislation does not include reference to federal and state/provincial regulations, it is important to include reference to worker safety and training in the best practices. Excavators are required to comply with federal and state/provincial occupational safety and health requirements to protect employees from injury and illness. These regulations include reference to training each employee to recognize and avoid unsafe conditions in the work environment, and to control or eliminate any hazards or exposures to illness or injury. Therefore, the excavator's crew, as part of its safety training, is informed of the best practices and regulations applicable to the protection of underground facilities.

References:

- Required by federal and state law
- Existing practice by excavators and facility owners/operators

5-17: Marking Preservation^{99/}



Practice Statement: The excavator protects and preserves the staking, marking, or other designation of underground facilities until no longer required for proper and safe excavation. The excavator stops excavating and notifies the 811 center for re-marks if any facility mark is removed or is no longer visible.

Practice Description: During an excavation project, the marks for underground facilities may need to be in place far longer than the utility marks are durable. Painting, staking, and other marking techniques can be compromised by construction activity, weather and unauthorized removal, and last only as long as they are visible. When a mark is no longer visible, but work is scheduled to continue around the facility, the excavator requests a re-mark to ensure the protection of the facility.

References:

- Existing state law, including Ohio

5-18: Excavation Observer



Practice Statement: The excavator has an observer to assist the equipment operator when operating excavation equipment around known underground facilities.

Practice Description: The excavator designates a worker (an observer) who watches the excavation activity and warns the equipment operator while excavating around a utility to prevent damaging that buried facility.

References:

- Existing state law, including Ohio
- Existing practice among large facility owners/operators, including Southern Natural Gas, Bell South and Columbia Gas

5-19: Excavation Tolerance Zone



Practice Statement: The excavator observes a tolerance zone that is comprised of the width of the facility plus 18 in. on either side of the outside edge of the underground facility on a horizontal plane. This practice is not intended to preempt any existing state/provincial requirements that currently specify a tolerance zone of more than 18 in.

Practice Description: (See Practice Statement 5-20.)

References:

- Existing state laws, including New Mexico, Pennsylvania, South Dakota and others
- Telecommunications Industry Association and Electronic Industry Association (TIA/EIA), “Standard for Physical Location and Protection of Below-Ground Fiber Optic Cable Plant” (ANSI/TIA/EIA-590-A-1996)
- American Public Works Association (APWA), “Guidelines for Uniform Temporary Marking of Underground Facilities”

5-20: Excavation within Tolerance Zone^{90/}



Practice Statement: When excavation is to take place within the specified tolerance zone, the excavator exercises such reasonable care as may be necessary for the protection of any underground facility in or near the excavation area. Methods to consider, based on certain climate or geographical conditions, include pot holing, hand digging when practical, soft digging, vacuum excavation methods, pneumatic hand tools, other mechanical methods with the approval of the facility owner/operator, or other technical methods that may be developed. Hand digging and non-invasive methods are not required for pavement removal.

Practice Description: Safe, prudent, non-invasive methods that require the excavator to manually determine the actual location of a facility are considered “safe excavation practices” in a majority of state/provincial laws. A majority of states outline safe excavation practices to include hand digging and/or pot holing. Some states specifically allow for the use of power excavating equipment for the removal of pavement. Each state/province must take differing geologic conditions and weather-related factors into consideration when recommending types of excavation within the tolerance zone.

References:

- Existing state laws, including Arizona, New Hampshire, Pennsylvania and others

5-21: Mismarked Facilities



Practice Statement: The excavator notifies the facility owner/operator directly or through the 811 center if an underground facility is not found where one has been marked, or if an unmarked underground facility is found. Following this notification, the excavator may continue work if the

excavation can be performed without damaging the facility, unless specified otherwise in state/provincial law.

Practice Description: When an excavator finds an unmarked or inaccurately marked facility, excavation stops in the vicinity of the facility and notification takes place. If excavation continues, the excavator plans the excavation to avoid damage and interference with other facilities and protects facilities from damage.

References:

- Existing state/local laws, including Arizona
- Existing practice among excavators, including W.F. Wilson & Sons, Inc.

5-22: Exposed Facility Protection



Practice Statement: Excavators support and protect exposed underground facilities from damage.

Practice Description: Protecting exposed underground facilities is as important as preventing damage to the facility when digging around the utility. Protecting exposed underground facilities helps ensure that the utility is not damaged and, at the same time, protects employees working in the vicinity of the exposed facility. Exposed facilities can shift, separate, or be damaged when they are no longer supported or protected by the soil around them. Excavators support or brace exposed facilities and protect them from moving or shifting, which could result in damage to the facility. This can be accomplished in different ways; for example, by shoring the facility from below or by providing a timber support with hangers across the top of an excavation to ensure that the facility does not move or bend. In addition, workers are instructed to not climb on, strike or attempt to move exposed facilities that could damage protective coatings, bend conduit, separate pipe joints, damage cable insulation, damage fiber optics or in some way affect the integrity of the facility. The Occupational Safety and Health Administration (OSHA) also has addressed this issue in Subpart P — Excavation Standard 29 CFR 1926.651(b)(4), which states “While the excavation is open, underground installations shall be protected, supported or removed as necessary to safeguard employees.” For example, an unsupported sewer main could shift, causing the pipe joints to separate, which could result in the trench where employees are working to flood, endangering the safety of employees.

References:

- Existing state/local laws, including Washington, D.C., Idaho, Utah, Arizona, Virginia, Pennsylvania, New York and others

5-23: Locate Request Updates^{127/}



Practice Statement: The excavator contacts the 811 center to refresh the ticket when excavation continues past the life of the ticket (sometimes, but not always, defined by state/provincial law). This recognizes that it is a best practice to define ticket life. Most states with a ticket life rule are within the range of 15 to 20 business days, or 21 to 30 calendar days. A ticket life should be set to account for factors including, but not limited to:

- Climate
- Geography
- The natural deterioration of facility location markings
- New installations of facilities during the life of the ticket
- Safety and efficiency

Locate request tickets are staged to minimize the number of locate requests so that the minimum number of locate request updates are

necessary for the duration of a project. After all the excavation covered by a locate request is completed, no additional locate request updates are generated. Communication between excavation project planners, field personnel, and clerical personnel is essential in accomplishing this task.^{36/}

Practice Description: Refreshing the ticket recognizes that markings are temporary and provides notification to facility owners/operators of ongoing excavation when a job is started but not completed. For any excavation that will extend beyond the life of the ticket, the excavator should contact the 811 center to maintain the validity of the ticket. By excavators refreshing the locate ticket, the facility owner/operator or their contract locator has another opportunity to ensure that the site is still fully located. Excellent planning, generation, and updating of tickets enhance safety and reduce the unnecessary use of locate resources.^{37/}

References:

- Existing laws in 34 states and provinces specify a ticket life of either 15-20 business days or 21-30 calendar days

5-24: Facility Damage Notification



Practice Statement: An excavator discovering or causing damage to underground facilities notifies the facility owner/operator and the 811 center. All breaks, leaks, nicks, dents, gouges, grooves, or other damages to facility lines, conduits, coatings or cathodic protection are reported.

Practice Description: A majority of states require notification for damage or substantial weakening of an underground facility (27 states). The possibility of facility failure or endangerment of the surrounding population dramatically increases when a facility has been damaged. Although the facility may not immediately fail, the underground facility owner/operator is provided the opportunity to inspect the damage and make appropriate repairs.

References:

- Existing state laws, including Arkansas, Idaho, Maryland and others

5-25: Notification of Emergency Personnel



Practice Statement: If the damage results in the escape of any flammable, toxic, or corrosive gas or liquid, or endangers life, health or property, the excavator responsible immediately notifies 911 and the facility owner/operator.^{3/} The excavator takes reasonable measures to protect everyone in immediate danger, the general public, property, and the environment until the facility owner/operator or emergency responders arrive and complete their assessment.^{4/}

Practice Description: This practice is already required by many of the states' one call legislation. This practice minimizes the danger to life, health or property by notifying the proper authorities to handle the emergency situation. In these situations, local authorities are able to evacuate as appropriate and command substantial resources unavailable to the excavator or underground facility owner/operator. The excavator takes reasonable measures based on their knowledge, training, resources, experience, and understanding of the situation to protect themselves, people, property and the environment until help arrives. The excavator responsible remains on-site to convey any pertinent information to responders that may help them to safely mitigate the situation.^{4/}

References:

- Existing state laws, including Kansas, Ohio, Oregon and Minnesota

5-26: Emergency Excavation

Practice Statement: In the case of an emergency excavation, maintenance or repairs may be made immediately, provided that the excavator notifies the 811 center and facility owner/operator as soon as reasonably possible. This includes situations that involve danger to life, health or property, or that require immediate correction in order to continue the operation of or ensure the continuity of public utility service or public transportation.

Practice Description: This practice allows excavation to begin immediately to restore service or to stop a hazardous situation from getting worse in the case of a gas or pipeline leak, cut telephone cable or other facility damage.

References:

- Existing state laws, including Colorado, Nevada, West Virginia and others (49 participating states or 811 centers)

5-27: Backfilling

Practice Statement: The excavator protects all facilities from damage when backfilling an excavation. Trash, debris, coiled wire, or other material that could damage existing facilities or interfere with the accuracy of future locates are not buried in the excavation.

Practice Description: Extra caution must be taken to remove large rocks, sharp objects, and large chunks of hard-packed clay or dirt. No trash or pieces of abandoned lines are backfilled into the trench. This helps prevent inadvertent damage to the facility during the backfill process.

References:

- Michigan DOT specification
- Existing insurance carrier guidelines

5-28: As-built Documentation

Practice Statement: Contractors installing underground facilities notify the facility owner/operator if the actual placement is different from the expected placement.

Practice Description: For a facility owner/operator to maintain accurate records of the location of their facilities, it is critical that the contractor installing the new facility be required to notify the facility owner/operator of deviations to the planned installation. Some facility owners/operators do not require a full-time inspector and use a sampling process to ensure that a new facility is correctly installed in compliance with specifications. When this occurs, it becomes much more critical for the contractor to notify the facility owner/operator of changes. For example, it is common for the contractor to make adjustments to the location of the new facility when rocks or other underground obstructions are encountered, or when the location of the new facility conflicts with another existing underground facility. This change in plan can represent changes in horizontal or vertical distances from the specified plans. The facility owner/operator establishes standards that require notification if a deviation is beyond specified tolerances, such as changes in depth of 6 in. or more and lateral measurement changes of greater than 1 ft. When these changes to the expected location are communicated to the facility owner/operator, it is the owner/operator's responsibility to take appropriate action to update their records so that an accurate locate can be conducted in the future.

References:

- Existing operating practice among facility operators, including Ameritech, Sprint, Columbia Gas and others

5-29: Trenchless Excavation^{13f}

Practice Statement: All stakeholders comply with all best practices and the following general guidelines prior to, during and after any trenchless excavation (as applicable).

Practice Description:

- The excavator requests the location of underground facilities at the entrance pit, trenchless excavation path and the exit pit by notifying the facility owner/operator through the 811 center.
- The trenchless equipment operator performs a site inspection, walking the trenchless excavation path prior to commencing work, and has a good understanding of the job.
- The trenchless excavation operator confirms and maintains the path and minimum clearances established by the project owner and design engineer by tracking and recording the path of the trenchless excavation until complete. Means of tracking trenchless excavations include electronic locating/guidance devices, pipe lasers, water levels, visual inspection, etc.
- When existing facilities are known to be present but cannot be potholed as a result of local conditions, the facility owner and the excavator meet to discuss how to safely proceed with the excavation.
- The excavator stops the trenchless excavation operations if an abnormal condition, unknown substructure or other hidden hazard is encountered. The excavator proceeds safely only after making positive identification. (Refer to Practice Statements 2-13 and 4-19 for additional information.)

References:

- See Appendix D

5-30: Emergency Coordination with Adjacent Facilities^{16f}

Practice Statement: Emergency response planning includes coordination with emergency responders and other aboveground and/or underground infrastructure facility owners/operators identified by the Incident Commander through the Incident Command System/Unified Command (ICS/UC) during an emergency.

Practice Description: During emergency situations, there are many stakeholders involved: excavators, locators, owners/operators, first responders, 811 centers and the general public. Any actions taken by one stakeholder could adversely affect other stakeholders. Accordingly, emergency planning and response are coordinated.

References:

- XCEL Energy, Minnesota
- Public Service Electric and Gas, Newark, New Jersey, Gas Emergency Procedure Manual

5-31: No Charge for Providing Underground Facility Locations^{23/}

Practice Statement: Upon notification by 811 centers, locations of underground facilities are provided by operators at no cost to excavators.

Practice Description: It is the basic underpinning of the call-before-you-dig process that persons involved in excavation activities receive facility locates at no charge when they contact their local 811 center to give notice of intent to excavate. This service is critical to maintaining the communication between operators and excavators. Call-before-you-dig education and marketing campaigns, such as 811 and those promoted by 811 centers and associated industries, advise persons involved in excavation activities, including the public, homeowners and professional excavators, that the service is provided by facility operators at no charge to the person providing the notice of intent to excavate.

References:

- Minnesota state statutes, Alberta pipeline

5-32: Vacuum Excavation^{39/}

Practice Statement: Vacuum excavation, when used appropriately, is an efficient, safe and effective alternative to hand digging within the designated underground facility tolerance zone. Use of equipment also follows state/provincial laws and/or local ordinances.

Practice Description: The safe exposure of underground facilities within the tolerance zone is essential to damage prevention. Site conditions may make the use of hand tools to expose underground facilities difficult or even impractical. Vacuum excavation is often an appropriate alternative. Locates must be obtained prior to the commencement of work (see One Call Facility Locate Request). Many underground facility owners/operators have specific criteria for safe excavation/exposure practices around their facilities. Some underground facility owners/operators accept vacuum excavation as equivalent to hand excavation for exposing their facilities, and others have restrictions on its use. Vacuum excavation is an appropriate method of excavating safely around underground facilities, provided that the equipment:

- has been specifically designed and built for this purpose;
- is operated by a worker trained and experienced in its operation;
- is operated in accordance with practices that provide appropriate levels of worker and public safety, and prevent damage to buried facilities; and
- is used in compliance with state/provincial laws and/or local ordinances.

References:

- Existing state laws, including South Carolina and North Carolina
- B.R.S., Inc.

5-33: Facility Owner Provides a Monitor During Excavation^{64/}



Practice Statement: If a facility owner/operator considers it necessary to be on site during excavation activities to work with the excavator in protecting their existing facilities, the facility owner/operator makes arrangements with the excavator to be present during those excavation activities within the time specified by state/provincial law.

Practice Description: The facility owner/operator may determine it necessary to be on site during excavation activities taking place near their facilities to help protect them. A facility owner/operator has access to information and resources that may not be available to the excavator. This practice should be considered in conjunction with Practice Statement 2-4: Utility Coordination.

References:

- North Carolina, Delaware, Florida, Ohio and California regulations

5-34: Designating and Depicting for the Protection of Known Underground Facilities in the Construction Path^{112/}



Practice Statement: Project Owners have a process that identifies the responsibility for preventing damages to existing facilities during the construction and design phase. In cases where projects are moved to the construction phase without adequately accounting for the precise location of known existing public and private underground facilities within the scope of the project, as outlined in Practices 2-2 and 2-3 of this publication, the contractor should follow Practice 5-10 (Locate Verification) or processes as required by state/provincial applicable law. It is important that any associated contract language be specific, so all parties understand and accept their responsibilities.

Practice Description: If the construction plans do not provide the applicable quality level of the SUE process in the planning and design phase, as outlined in Practice 2-14 – Subsurface Utility Engineering (SUE), a process is required that ensures the precise location of facilities within the construction path are adequately accounted for and protected during excavation and backfill operations.

With the adoption of alternative project delivery methods, there is a need to reinforce proven damage prevention best practices and ensure they are understood and accepted. Identifying and verifying the location of existing underground facilities in advance of construction is a proven method to prevent damages and the responsibility should be detailed contractually so there is no ambiguity.

Benefits: The benefits associated with this practice are multiple: service interruptions to customers are minimized, productivity and bid/estimate accuracy are maintained, employee and public safety are achieved by the avoidance of excavation related damage.

References:

- AQUA of Pennsylvania, Design and Construction Requirements
- Pennsylvania, Colorado, and Indiana state law

5-35: Large/Complex Project Locate Request^{12B/}



Practice Statement: The excavator uses a large/complex project locate request for projects that can require additional time and/or different processes for locate requests that are significantly larger, and/or of longer duration, and/or more complex than standard locate requests.

Practice Description: This process is for an excavation notification generated by the 811 center that involves more work than can reasonably be completed within the time requirements often defined in state or provincial law associated with a standard excavation locate request. This practice typically requires enhanced periodic communication between the excavator and impacted facility owners during the course of the project.

These communications and marking agreements can be processed through the 811 center where available.

In some states, design notifications can be considered large projects and can require a subsurface utility engineering process (SUE).

Benefits: Provides a process for improved communication between excavators, project owners, designers, locators, and operators, and more efficient locating by providing adequate time for facility locating to occur on large or extended excavations.

References:

- Existing state laws and/or regulations – Delaware, Georgia, Illinois, Louisiana, Maryland, Pennsylvania, South Carolina
- Voluntary best practices – Iowa, Indiana, Montana, Oregon
- CGA Best Practices 2-2, 2-14, 2-16, Appendix A: Glossary of Terms and Definitions, definition of “Large/Complex Project”

Mapping



The Mapping Team chose to look at mapping practices from the viewpoint of the different areas represented by team members. From this viewpoint, the best practices for mapping can be listed in five distinct areas: 811 Center, Locator, Excavator, Facility Owner/Operator, and Project Owner. By consensus of the Mapping Task Team, all of the findings listed below are best practices.

811 CENTER

An 811 center uses an electronic mapping database system that includes the following:

6-1: Land Base Accuracy



Practice Statement: The land base is accurate.

Practice Description: The land base is the most precise geographical information available to the 811 center. The 811 centers in these states follow this practice: Arizona, Minnesota, North Carolina, Texas and Wisconsin.

6-2: Latitude/Longitude



Practice Statement: The land base and database use latitude/longitude (Lat/Long) coordinates.

Practice Description: The land base and database can produce Lat/Long information based upon street address, street/road name, intersection, milepost marker, etc. It also is possible to determine the street address, street/road name, intersection or milepost based upon Lat/Long information. The translation of Lat/Long information is automatic. A map point (i.e., a rural area not in the immediate vicinity of a road or known map landmark) can be identified by Lat/Long information. The 811 centers in these states follow this practice: Ohio, South Dakota, New Jersey, Missouri and Tennessee.

6-3: Up-to-date Land Base Information



Practice Statement: The land base is up-to-date.

Practice Description: The land base is kept up-to-date, and a process is in place that periodically adds new street information, name changes, aliases and municipal boundaries. The 811 centers in these states follow this practice: Arizona, Ohio and New Jersey.

6-4: Timely Database Updating



Practice Statement: The database is updated by information from facility owners/operators.

Practice Description: The database is promptly updated as information is provided or becomes available from the facility owner/operator. The system can accept information in standard file format with minimal human intervention. The 811 centers in these states follow this practice: Arizona, North Carolina, Ohio, New Jersey and Wisconsin.

6-5: Electronic Mapping Location Area



Practice Statement: The electronic mapping system can produce a ticket for the smallest practical geographical area.

Practice Description: The electronic mapping system can produce a ticket for the smallest practical geographical area. The 811 centers in these states follow this practice: Arizona, Tennessee, Minnesota, Oregon and Wisconsin.

6-6: Availability



Practice Statement: The land base is available to the public.

Practice Description: The land base is available to the public for the identification of the excavation area. The land base and database are available to the 811 center membership for the update of member database information. The 811 centers in these states follow this practice: North Carolina, Ohio and South Dakota.

LOCATOR

Locators use maps to help find the excavation site and to help determine the general location of the buried facility.

6-7: Training



Practice Statement: Locators are trained in map reading and symbology.

Practice Description: Locators are trained in map reading and symbology to help determine the location of the buried facility. The following association trains its members to carry out this practice: National Utility Locating Contractors Association (NULCA).

6-8: Discrepancies



Practice Statement: The locator provides precise facility location to the facility owner/operator when there is a discrepancy.

Practice Description: The locator provides to the facility owner/operator the most precise facility location information obtained from a locate when there is a discrepancy.

References:

- Arizona Blue Stake law

6-9: Feedback



Practice Statement: The locator supplies feedback to the 811 center.

Practice Description: The locator provides to the 811 center feedback on land base mapping and location discrepancies. The following states carry out this practice: Ohio, Tennessee and North Carolina.

EXCAVATOR

6-10: Accuracy of Location Information



Practice Statement: The excavator provides accurate location information to the 811 center.

Practice Description: The excavator takes responsibility for giving accurate location information to the 811 center. This information includes a street address, street intersection, legal description or other appropriately formatted information, and latitude/longitude (if feasible).

6-11: Excavation Area Details



Practice Statement: The excavator provides to the 811 center basic attributes about the excavation area.

Practice Description: The excavator provides details about the excavation area location, such as starting and ending points, the side of the property (north, south, east, west, front, back, rear, sides, etc.) and the side of the street. If the excavator cannot meet the above criteria, the excavator directly coordinates with the 811 center to establish the excavation area.

References:

- Michaels Pipeline Company, Brownsville, Wisconsin
- Hooper Corporation, Pewaukee, Wisconsin
- Intercon Construction, Madison, Wisconsin

FACILITY OWNER/OPERATOR

6-12: Mapping Data



Practice Statement: The facility owner/operator provides mapping data to the 811 center.

Practice Description: The facility owner/operator provides the 811 center with data that will allow efficient and accurate notification of excavation activities near the facility owner/operator's infrastructure. Facility owners/operators in all mandatory one call states follow this practice.

6-13: Access to Mapping Data



Practice Statement: The facility owner/operator provides mapping data access.

Practice Description: The facility owner/operator provides access to a mapping system that can be used by both the locator and the facility owner/operator. These facility owners/operators follow this practice: Atlanta Gas Light, Sprint Long Distance, AT&T, Questar Regulated Services.

6-14: Mapping Standards



Practice Statement: The facility owner/operator adheres to mapping standards.

Practice Description: The facility owner/operator requires the designer to adhere to the facility owner/operator's mapping standards. These facility owners/operators follow this practice: AT&T, Sprint Long Distance.

6-15: Quality of Information

Practice Statement: The facility owner/operator provides consistent, current information to the 811 center.

Practice Description: The facility owner/operator provides consistent, current information to the 811 center for the proper receipt of ticket notification. Basic information includes latitude and longitude, and pertains to a physical attribute where available, such as a milepost marker. This facility owner/operator follows this practice: Sprint Long Distance.

6-16: Information Capture

Practice Statement: The facility owner/operator collects detailed mapping information.

Practice Description: The facility owner/operator captures through the electronic database the following information to ensure project safety in the plan, design, construction, documentation, location and maintenance of their longitudinal utility.

- Any new construction that was entered at the time of installation
- The location of abandoned or sold facilities
- Engineering stationing and milepost/marker post location (with latitude and longitude), using common mapping coordinate systems that allow conversion to latitude and longitude
- Alignment of the utility with engineering stationing at each running line change or point of inflection (PI), including signs and markers
- Bridges, culverts and rivers
- All road crossings; overhead viaducts and underpasses, including name of the street (public or private); and mile-marker/marker-post designation
- Small-scale maps showing the overall utility route
- Physical characteristics and attributes of the system, such as pedestal, pole, transformer, meter number, anode bed, size, material, product and pressure
- The number of utility lines or conduits owned by the facility owner/operator in a corridor, or the size of the duct package bank (universally a general practice of major pipeline and long-distance telecommunication operators and railroads)
- When available, any digital imagery that is used to identify facility locations in relation to the surrounding environment^{35/}

PROJECT OWNER**6-17: Accuracy of Location Information**

Practice Statement: The project owner provides accurate information.

Practice Description: The project owner provides the excavator with accurate location information about the proposed excavation area using mapping information used by the 811 center. This information includes a street address, street intersection, legal description or other appropriately formatted information, such as orthophotography and latitude/longitude (if feasible).^{26/}

6-18: Excavation Area Details



Practice Statement: The project owner determines the excavation area's basic coordinates.

Practice Description: The project owner determines details about the excavation area location, such as starting and ending points, the side of the property (north, south, east, west, front, back, rear, sides, etc.), and side of the street.

References:

- These are general practices of the state departments of transportation regarding highway projects.
- These are general practices of most National Utility Contractors Association (NUCA) members. The references listed in each best practice are not all inclusive.

FACILITY OWNER/OPERATOR

6-19: As-Built Mapping of Underground Electronic Utility Markers^{73/}



Practice Statement: The location of underground electronic utility markers is identified on as-built mapping, GIS mapping and/or other underground facility mapping documents.

Practice Description: Appropriate asset data collection and data management procedures are in place after completion of the underground facility installation. Primary among these is the practice to note in all as-built mapping where path and point markers are installed to increase the awareness of the existence of underground facility markers during the locate process.

References:

- ASCE 38-02 "Standard Guideline for the Collection and Depiction of Existing Subsurface Utility Data"
- See Practice Statement 2-18, "Identifying Newly Installed or Under-Construction Facilities"
- Consolidated Edison guideline, "Installation of electronic markers on gas mains and services"

Emerging Technologies

Technology is rapidly changing. Many of the best practices identified in this chapter could be obsolete in the near future. Although the following technologies are now used in other applications, their use is not widespread in the damage prevention field:

- Geographic Information System (GIS)
- Global Positioning System (GPS)
- Orthographic and satellite imagery

GIS allows the integration of digital maps with other databases to view the relationship of physical features, conducts relational queries and obtains additional information on a particular feature. The GIS infrastructure or base will support all of the advanced technologies of GPS, orthographic and satellite imagery.

Combining orthographic and satellite imagery with an overlay of a line map, street names, addresses and GPS coordinates of utility lines will allow 811 centers, excavators, locators, facility owners/operators and project owners to view the accurate and relative location of utility lines.

Advanced use of these technologies in combination with advances to locating technologies is expected to reduce damage to underground facilities.

CHAPTER 7

Compliance



7-1: Public and Enforcement Education



A: Public Education

Practice Statement: Public education programs are used to promote compliance.

Practice Description: A single entity is charged to promote comprehensive and appropriate programs to educate all stakeholders about the existence and content of the damage prevention laws and regulations. This is not meant to discourage individual stakeholders from providing educational programs.

References:

- New York: “Each one call notification system shall perform the following duties:...(b) Conduct a continuing program to: (1) Inform excavators of the one call notification system’s existence and purpose and their responsibility to notify the one call notification system of proposed excavation and demolition and to protect underground facilities. (2) Inform operators of the responsibility to participate in the one call notification system, to respond to a notice relating to a proposed excavation and demolition, and to designate and mark facilities according to the provisions of this Part.” New York Code, 16 NYCRR Part 753, § 753-5.3(b)(1)-(2)

B: Enforcement Education

Practice Statement: Mandatory education is considered as an alternative or supplement to penalties for offenders of the damage prevention laws and regulations.

Practice Description: When a violation of the damage prevention laws or regulations has occurred, mandatory education is an effective alternative or supplement to civil penalties. Mandatory education as an enforcement tool promotes compliance with damage prevention laws and regulations.

References:

- Arizona: “When a notice of violation (NOV) is issued, the following may be followed: 1. First Time Offenders: A. May be given a warning letter and Item C below...C. Given the opportunity to attend Blue Stake Training Course provided by the Arizona Corporation Commission’s Pipeline Safety Section.” Arizona Corporation Commission policy, “Notice of Violation,” § 1(A) and (C)
- New Hampshire: “Any excavator or operator who does not comply with RSA 374:51-54 shall be required on first offense to go through either a Dig Safe training program or be subject to a civil penalty...” New Hampshire Code, RSA 374, § 374:55(VIII)

7-2: Incentives



Practice Statement: Damage prevention programs include incentives to promote compliance with laws and regulations.

Practice Description: Incentives can include, but are not limited to, ease of access to 811 center, membership and participation considerations, representation on 811 center boards, reasonable enforcement of regulations, safety and liability protection, access to alternative dispute resolution (ADR), and public education.

Incentive — Membership: Membership facilitates communication between an excavator and facility owner/operator, which helps prevent damage to underground facilities.

References:

- Arizona: “If the owner or operator fails to locate or incorrectly locates the underground facility, pursuant to this article, the owner or operator becomes liable for resulting damages, costs, and expenses to the injured party.” Arizona Code, Article 6.3, § 40-360.27(C)
- Minnesota: “Reimbursement is not required if the damage to the underground facility was caused by the sole negligence of the operator or the operator failed to comply with section 216.04, subdivision 3.” Minnesota Code, Chapter 216D.06, Subd. 2(b)
- Pennsylvania: Stakeholders who do not join the 811 system in violation of state law are not permitted to recover damages for injury to their property: “If a facility owner fails to become a member of a One Call System in violation of this act and a line or lines of such nonmember facility owner are damaged by a contractor by reason of the contractor’s failure to notify the facility owner because the facility was not a member of a One Call System serving the location where the damage occurred, such facility owner shall have no right of recovery from the contractor of any costs associated with the damage to its lines. The right herein granted shall not be in limitation of any other rights of the contractor.” Pennsylvania Code, 73 P.S. § 176 et. seq., Section 2(9)

Incentive — Membership Accommodations: To avoid cost being a barrier to membership, several states have made membership accommodations for smaller municipalities and authorities.

References:

- Arizona: “Each one call notification center shall establish a limited basis participation membership option, which may be made available to all members, but which must be made available for any member serving less than one thousand customers or any member irrigation or electrical district. A facility owner who elects limited basis participation membership will provide to the one call center the location of its underground facilities by identifying the incorporated cities and towns, or for unincorporated county areas, by identifying the townships, in which it has facilities. The service level provided to the limited basis participation members by the one call notification center is limited to providing excavators with names and telephone numbers the excavator should contact to obtain facilities location. Each one call center shall establish fair and reasonable fees for limited basis participation members, based on customer count, areas occupied or miles of underground facilities.” Arizona Code, Article 6.3, § 40-360.32. Note, Arizona’s system somewhat defeats the purpose of “one call,” but is successful because Arizona 811 goes the extra mile to assist the excavator in contacting the small facility owners, many of which do not have a manned telephone line.
- Minnesota: The Gopher State One Call Center instituted a no-locate-required policy, which credits the facility operator those charges for “not-involved” tickets. It results in cost savings to the facility owners/operators because 811 center membership rates are based on the number of tickets received by the facility owners/operators.
- New York: “3. Costs. The costs of operating the system shall be apportioned equitably among the members of the system, with the exception of municipalities and authorities that operate underground facilities and any operator of underground facilities that provides water service to less than four thousand customers. In apportioning such costs, the system shall take into account the number of customers, extent of underground facilities, and frequency of use.” New York General Business Law Article 36, § 761

- Pennsylvania: “Operation costs for the One Call System shall be shared, in an equitable manner for services received, by facility owner members as determined by a One Call System’s board of directors. Political subdivisions with a population of less than two thousand persons or municipal authorities having an aggregate population in the area served by the municipal authority of less than five thousand persons shall be exempt from payment of any service fee.” Pennsylvania Code, 73 P.S. § 176 et. seq., Section 2(8)

Incentive — 811 Center Board of Directors: Boards are composed of representatives of all stakeholders. Representation of all stake holders in the governance of the 811 center (although not necessarily in the administration of the 811 center) ensures that the viewpoint of all stakeholders will be considered in the policies and programs of the 811 center.

References:

- Minnesota: “The nonprofit corporation must be governed by a board of directors of up to 20 members, one of whom is the director of the office of pipeline safety. The other board members must represent and be elected by operators, excavators, and other persons eligible to participate in the center...” Minnesota Code, Chapter 216D.03, Subd. 2(a)
- Pennsylvania: “A one call system shall be governed by a board of directors, to be chosen by the facility owners. No less than twenty percent of the seats shall be held by municipalities or municipal authorities. The board shall include the following: (1) The Chairman of the Pennsylvania Public Utility Commission or his designee. (2) The Director of the Pennsylvania Emergency Management Agency or his designee. (3) The Secretary of Labor and Industry or his designee. (4) The Secretary of Transportation or his designee. (5) A contractor or industry representative. (6) A designer or industry representative.” Pennsylvania Code, 73 P.S. § 176 et. seq., Section 7.1(b)

Incentive — Safety and Liability Protection: Compliance with 811 center requirements promotes worker safety and public safety, and reduces exposure to liability.

References:

- New York: “The penalties provided for by this article shall not apply to an excavator who damages an underground facility due to the failure of the operator to comply with any of the provisions of this article nor shall in such instance the excavator be liable for repairs as prescribed in subdivision four of this section.” New York Code, 16 NYCRR Part 753, § 765(b).
- Pennsylvania: “The designer who has complied with the terms of this act and who was not otherwise negligent shall not be subject to liability or incur any obligation to facility owners, operators, owners, or other persons who sustain injury to person or property as a result of the excavation or demolition planning work of the designer.” Pennsylvania Code, 73 P.S. § 176 et. seq., Section 3(7).

Incentive — Reasonable Enforcement of Regulations: Reasonable enforcement of regulations refers to actions by enforcement authority officials and enforcement processes, both of which aim to fairly arrive at rational outcomes, such as education and penalties that correspond to the gravity of the violation, without imposing unnecessarily high transaction costs on any participant, including the enforcement authority.

References:

- In Massachusetts, a state where a violator’s “history” is considered when addressing a violation, repeat offenders of the one call law can attain first-time offender status if they demonstrate compliance for a solid year. “Any person, contractor, excavator, or company found by the Department to have violated any provision of the Dig Safe law or regulation adopted by the Department thereunder shall be subject to a civil penalty not to exceed \$500 for the first offense and not less than \$1,000 nor more than

\$5,000 for any subsequent offense within a 12 month period after the Department issues a remedial order or executes a consent order for the first offense. Any excavator whose subsequent violation occurs after 12 consecutive months of no violations shall be subject to a civil penalty of \$500.” Massachusetts Regulation, 220 C.M.R. § 99.12(1)

7-3: Penalties



Practice Statement: Compliance programs include penalties for violations of the damage prevention laws or regulations.

Practice Description: Within the context of one call statutes, there exists specific provisions for penalties for failure to comply with the damage prevention laws and regulations. Performance and penalty incentives are equitably administered among stakeholders subject to one call provisions.

A **penalty system** includes education as an alternative or supplement to civil or other penalties.

References:

- New Hampshire: “Any excavator or operator who does not comply with RSA 374:51-54 shall be required on first offense to go through either a ‘Dig Safe’ training program or be subject to a civil penalty...” New Hampshire Code, RSA 374, § 374:55(VIII)

A **penalty system** also uses a tiered structure to distinguish violations by the level of severity or repeat offenses (e.g., warning letters, mandatory education, civil penalty amounts).

References:

- Arizona: “When a notice of violation (NOV) is issued, the following may be followed: 1. First Time Offenders: A. May be given a warning and Item C below or B. May be fined \$250 per violation and C. Given the opportunity to attend a Blue Stake Training Course provided by the Arizona Corporation Commission’s Pipeline Safety Section. Note: the investigator may use the NOV as a warning, if they feel a warning would suffice. 2. Second Offense: A. May be fined \$250 per violation and B. Given the opportunity to attend a Blue Stake Training Course provided by the Arizona Corporation Commission Pipeline Safety Section. 3. Repeat Offenders: A. Third Time: May be fined \$500 per violation. B. Four or More Times: Could be fined up to \$2000 per violation. Flagrancy or magnitude of offense could cause pipeline safety to deviate from this policy. Any deviation to the above-stated policy will jointly be determined by the Chief of Pipeline Safety and the Investigator.” Arizona Corporation Commission policy, “Notice of Violation,” section 1-3
- New York: “Warning letters: Upon determining that a probable violation(s) of a provision of Part 753 has occurred or is continuing, the Department may issue a warning letter notifying the Respondent of the probable violation and advising him or her to correct it, if it is correctable, and to comply henceforth, or be subject to enforcement actions under this Part.” NY Public Service Commission policy (proposed code § 753-6.3)

A **penalty system** also establishes mitigating and aggravating factors for determining the penalty for a violation by statute or regulation.

References:

- Massachusetts: “In determining the amount of the civil penalty, the Department shall consider the nature, circumstances, and gravity of the violation; the degree of the respondent’s culpability; the respondent’s history of prior offenses; and the respondent’s level of cooperation with the requirements of this regulation.” Massachusetts Regulation, 220 C.M.R. § 99.12(2)

- Minnesota: “In assessing a civil penalty under this part, the office shall consider the following factors: A. the nature, circumstances, and gravity of the violation; B. the degree of the person’s culpability; C. the person’s history of previous offenses; D. the person’s ability to pay; E. good faith on the part of the person in attempting to remedy the cause of the violation; F. the effect of the penalty on the person’s ability to continue business; and G. past reports of damage to an underground facility by a person.” Minnesota Rules, 7560.0800, Subpart 3
- New Hampshire: “In determining the assessment, the following factors shall be considered: (1) Severity of the consequences resulting from the violation: the more severe the consequences, the higher the civil penalty; (2) Mitigating circumstances: i.e., how quickly actions were taken to rectify the situation, how much control the company had over the situation, and other circumstance which would tend to less fault; and (3) Prior violations of Puc 800.” New Hampshire Regulation, Chapter Puc 800, § Puc 805.06(b)(1)-(3)
- New York: “...the commission shall determine the amount of the penalty after consideration of the nature, circumstances, and gravity of the violation, history of prior violations, effect on public health, safety or welfare, and such other matters as may be required and shall send a copy of its determination to the excavator, operator, commissioner of labor, and attorney general.” New York Public Service Law, § 119-b(8)
- Virginia: “In determining the amount of any civil penalty included in a settlement, the nature, circumstances, and gravity of the violation; the degree of the Respondent’s culpability; the Respondent’s history of prior offenses; and such other factors as may be appropriate shall be considered.” Virginia “Rules for Enforcement of the Underground Utility Damage Prevention Act,” § 6

A **penalty system** does not allow any violator or class of violators to be shielded from the consequences of a violation (i.e., all stakeholders should be accountable).

References:

- New Hampshire: “Any excavator or operator who does not comply with RSA 374:51-54 shall be required on first offense to go through either a ‘Dig Safe’ training program or be subject to a civil penalty...” New Hampshire Code, RSA 374, § 374:55(VIII)

7-4: Damage Recovery



Practice Statement: State damage prevention laws and regulations recognize the right to recover damages and costs resulting from noncompliance.

A: Right of Recovery

Practice Description: The statute recognizes an injured party’s right to recovery when damages and/or costs are incurred as the direct result of an entity’s failure to comply with the one call laws and regulations. For example, Arizona endorses an injured party’s right to recover damages when the other party has failed to comply with the one call law.

References:

- Arizona: “If an underground facility is damaged by any person as a result of failing to obtain information as to its location, failing to take measures for protection of the facilities, or failing to excavate in a careful and prudent manner as required by this article, the person is liable to the owner of the underground facility for the total cost of the repair of the facility.” Arizona Code, Article 6.3, § 40-360.26(A)

- Arizona: “If the owner or operator fails to locate or incorrectly locates the underground facility, pursuant to this article, the owner or operator becomes liable for resulting damages, costs, and expenses to the injured party.” Arizona Code, Article 6.3, § 40-360.28(C)

B: Alternative Dispute Resolution

Practice Description: Avenues for settlement of disputes include alternative dispute resolution. Minnesota endorses ADR through the state court system, New Jersey endorses ADR in construction contract documents, and the federal government endorses ADR through the federal courts.

References:

- Minnesota: “The Supreme Court shall establish a statewide alternative dispute resolution program for the resolution of civil cases filed with the courts. The Supreme Court shall adopt rules governing practice, procedure, and jurisdiction for alternative dispute resolution programs established under this section. Except for matters involving family law, the rules shall require the use of nonbinding alternative dispute resolution processes in all civil cases, except for good cause shown by the presiding judge, and must provide an equitable means for the payment of fees and expenses for the use of alternative dispute resolution processes.” Minnesota Code, Chapter Title: District Courts, § 484.76
- New Jersey: “All construction contract documents entered into in accordance with the provisions of P.L. 1971, c. 198 (C.40A:11-1 et seq.) after the effective date of P.L. 1997, c.371 (C.40A:11-50) shall provide that disputes arising under the contract shall be submitted to a process of resolution pursuant to alternative dispute resolution practices, such as mediation, binding arbitration, or non-binding arbitration pursuant to industry standards, prior to being submitted to a court for adjudication. Nothing in this section shall prevent the contracting unit from seeking injunctive or declaratory relief in court at any time. The alternative dispute resolution practices required by this section shall not apply to disputes concerning the bid solicitation or award process, or to the formation of contracts or subcontracts to be entered into pursuant to P.L. 1971, c. 198 (C.40A:11-1 et seq.)” New Jersey Code, Title 40A, § 40A-11-50
- Federal: “Congress finds that (1) alternative dispute resolution, when supported by the bench and bar, and utilizing properly trained neutrals in a program adequately administered by the court, has the potential to provide a variety of benefits, including greater satisfaction of the parties, innovative methods of resolving disputes, and greater efficiency in achieving settlements; (2) certain forms of alternative dispute resolution, including mediation, early neutral evaluation, minitrials, and voluntary arbitration, may have potential to reduce the large backlog of cases now pending in some federal courts throughout the United States, thereby allowing the courts to process their remaining cases more efficiently; and (3) the continued growth of Federal appellate court-annexed mediation programs suggests that this form of alternative dispute resolution can be equally effective in resolving disputes in the federal trial courts; therefore, the district courts should consider including mediation in their local alternative dispute resolution programs...Each United States district court shall authorize, by local rule adopted under section 2071(b) 2071(a), the use of alternative dispute resolution processes in all civil actions, including adversary proceedings in bankruptcy, in accordance with this chapter, except that the use of arbitration may be authorized only as provided in section 654 [(1) the action is based on an alleged violation of a right secured by the Constitution of the United States; (2) jurisdiction is based in whole or in part on section 1343 of this title; or (3) the relief sought consists of money damages in an amount greater than \$150,000.]” Alternative Dispute Resolution Act of 1998, enacted October 1998.

7-5: Enforcement

**A: Authority**

Practice Statement: An authority is specified through state statutes and given the resources to enforce the law.

Practice Description: The enforcement authority in each state has the resources to enforce the laws and regulations. Experience has demonstrated that enforcement of the one call laws and regulations that did not identify a specific authority other than the attorney general has not been effective.

Characteristics of such an authority include the following:

- A process for receiving reports of violations from any stakeholder
- An operating budget source other than fine revenue, such as a line item in the state budget, excluding fines as a source of income for the authority
- Stakeholder involvement in periodic review and modification of enforcement processes
- Resources to respond to notifications of alleged violations in a timely manner
- A method of investigating alleged violations prior to issuing a notice of probable violation
- Impartial authority adjudicating violations
- An initial informal means of contesting a notice of violation
- A published violation review process and violation assessment considerations

References:

- Arizona: The Pipeline Safety Division of the Arizona Corporation Commission is funded by the Commission budget. “Any penalties received by the state shall be deposited in the general fund.” Arizona Code, Article 6.3, § 40-360.28
- Massachusetts: “... Any other person may report a suspected violation of M.G.L. c. 82 s. 40 to the Department. All such reports shall be in a form deemed appropriate and necessary by the Department.” Massachusetts Regulation, 220 C.M.R. §99.01(1)
- Massachusetts: The Massachusetts Department of Telecommunications and Energy investigates all complaints received from excavators and facility owners/operators and conducts random field investigations. The Department then issues a Notice of Probable Violation if, based on the investigation, it has reason to believe that a violation has occurred or is occurring. “The Department may begin a proceeding by issuing a notice of probable violation (“NOPV”) if the Department has reason to believe that a violation of the M.G.L. c. 82, § 40, has occurred or is occurring... The NOPV shall state the factual basis for the allegation of a violation...” Massachusetts Regulation, 220 C.M.R. § 99.07(1)
- Minnesota: “The office shall issue a notice of probable violation when the office has good cause to believe a violation of Minnesota Statutes, sections 216D.01 to 216.D.09 of this chapter has occurred...A notice of violation must include: A. a statement of the statute or rule allegedly violated by the person and a description of the evidence on which the allegation is based.” Minnesota Rules, 7560.04000, Subp.1 - Subp. 2(A)
- Minnesota: See also Minnesota Rules, 7560.0400, Subp. 1, Notice of Violation; 7560.0500 Response Options; 7560.0600, Director Review; 7560.0800 Civil Penalties; Subp. 3, Assessment considerations
- New Hampshire: “Upon receipt of the NOPV [Notice of Probable Violation] the respondent shall either: (1) Submit in writing, within 30 days, evidence refuting the probable violation referenced in the NOPV; or (2) Request in writing within 30 days, an informal conference with commission staff to examine the basis of the violation, at which time the respondent may

be represented by an attorney or other person; or (3) Waive procedural schedule by signing a consent agreement.” New Hampshire Regulation, Chapter Puc 800, § Puc 805.02

- New Hampshire: See also New Hampshire regulations, Chapter Puc 800, sections Puc 805.01, “Notice of Probable Violation”; Puc 805.02, Alternative Responses to Notice of Probable Violation; Puc 805.03, Notice of Violation; Puc 805.04, Response to Notice of Violation; Puc 805.05 Commission Action; Puc 805.06, Civil Penalties
- Virginia: The Advisory Committee, which is established by statute to include “representatives of the following entities: Commission staff, utility operator, notification center, excavator, municipality, Virginia Department of Transportation, Board of Contractors, and underground line locator,” meets one day annually (in addition the monthly hearings) for “issue day,” a day to discuss issues and make recommendations to the State Corporation Commission (SCC) administrative three-judge panel on issues related to damage prevention. Sub-teams of the Advisory Committee are also formed to develop recommendations. “The purpose of the Committee is to...make recommendations with regard to Public Education and Awareness Programs that further public safety by the reduction of damage to the underground utility facilities in the Commonwealth and to monitor, analyze, influence, propose, support, or oppose programs or regulations that directly affect damage to underground facilities serving the citizens of the Commonwealth.” Bylaws of the Advisory Committee, Article II
- Virginia: “Upon receipt of a report of a probable violation, the Commission staff (“Staff”) shall conduct an investigation to examine all the relevant facts regarding the reported probable violation. The investigation may include, among other things, records verification, informal meetings, teleconferences, and photo-documentation. Upon completion of the investigation, the Staff shall review its findings and recommendations with the Advisory Committee established in accordance with 56-265.31 of the Act.” Virginia “Rules for Enforcement of the Underground Damage Prevention Act,” § 3

B: Structured Review Process

Practices Statement: A structured review process is used to impartially adjudicate alleged violations.

Practice Description: Two types of review processes currently used are outlined below. These type of processes differ in terms of 1) who receives reports of alleged violations, 2) who investigates the reports, 3) possible outcomes of the investigation, 4) who conducts first tier (informal) hearings, 5) possible outcomes of first tier hearings, and 6) appeal rights following a second tier (formal) hearing. It is important that review processes are constructed to avoid abuses of authority and prevent any individual, industry, stakeholder or agency from exercising undue power or influence over the process.

Type 1: Traditional Enforcement Authority — This system is currently used in Arizona, Connecticut, Massachusetts, Minnesota, New Hampshire, New Jersey, New York and Pennsylvania. Reports of alleged violations are sent to the State Agency. A state investigator investigates the reports. If the investigator decides not to issue a NOPV (Notice of Probable Violation), the matter is concluded. If not, the NOPV is issued, and the investigator conducts an informal hearing or review. If the investigator determines that no violation was committed, the matter is concluded. If the investigator determines that a violation was committed, the NOV (Notice of Violation) is issued. If the alleged violator does not contest the NOV, the alleged violation is bound by the facts, findings, orders and penalties set forth in the NOV. If the alleged violator so requests, the State Agency conducts a formal hearing. The alleged violator may appeal the decision reached in the formal hearing to the state court system.

Type 2: Advisory Committee (made up of stakeholders) partnered with

State Agency — This system is currently used in Virginia. Reports of alleged violations are sent to the State Enforcement Agency. The State Agency investigates the alleged violations and reports to an advisory committee. The committee is made up of stakeholders representing the following statutorily mandated fields: excavators, facility owners/operators, notification centers, contract locators, local governments, State Department of Transportation, the Board of Contractors, and the State Enforcement Agency. If the advisory committee decides not to issue a NOPV (Notice of Probable Violation), the matter is concluded, possibly with a “letter of concern” containing one call information. If the advisory committee decides to issue an NOPV, it is issued by the State Agency. If the alleged violator does not request a hearing, the alleged violator is bound by the enforcement action set forth in the NOPV. If the alleged violator so requests, an informal hearing is held by the advisory committee. If the advisory committee decides that no violation was committed, the matter is concluded, subject to the right of the State Agency to contest that decision in an administrative proceeding conducted by the agency. If not, the NOV is issued. If the alleged violator then settles the matter with the advisory committee, the settlement is subject to approval by the State Agency in an administrative proceeding. If there is no settlement, the State Agency conducts a formal administrative hearing. The alleged violator may appeal the decision reached in the formal hearing to the state court system.

LEFT BLANK INTENTIONALLY

CHAPTER 8

Public Education and Awareness



8-1: Marketing Plan



Practice Statement: An effective damage prevention education program includes a comprehensive, strategic marketing/advertising plan.

Practice Description: A comprehensive, strategic marketing/advertising plan enables better implementation, control and continuity of advertising/public relations programs, and ensures the most effective and efficient use of limited resources. These plans focus on setting realistic goals and allocating sufficient resources required to achieve those goals within a specified time frame. The marketing plan is a set of action steps based on a comprehensive situation analysis that clearly states the following:

- What is to be achieved
- How it will be achieved
- When it will be achieved
- Who is responsible for achieving each goal
- What amount of resources (time, people and money) will be allocated to achieving each goal

References:

- Louisiana 811 Systems, Inc. Project 2000, 1998 Marketing Plan
- Public Awareness Marketing Plan for Underground Utility Damage Prevention, prepared for the Damage Prevention Quality Action Team by The Daily Planit, November 20, 1997
- Underground Protection Center (UPC) of Georgia
- Various 811 centers, including AL, AZ, CT, GA, IL, IA, KY, MO, NM, NY (City), NC, OK, OH, OR, WV, and WI

8-2: Marketing 811 — A National One Call Number^{32/}



Practice Statement: An effective damage prevention education program includes promoting the national 811 number and awareness campaign by communicating the number and “call before you dig” process to excavators and the general public.

Practice Description: Practice Statement 8-1 identifies the need for a marketing plan and specifies that the plan include the promotion of the 811 number.

- Stakeholder and marketing groups include the following:
- 811 notification centers
- Owners and operators of underground facilities
- Construction industry
- Regulatory agencies

Product and services representatives from the one call industry actions that lead to a successful incorporation of 811 into your marketing plan include the following:

- Inclusion of the 811 logo on websites and newsletters
- Placing the 811 logo on owner/operator vehicles and equipment
- TV and radio promotions and public service announcements
- Billboard advertising
- Inclusion of the 811 logo on products and in service promotions

References:

- State 811 centers
- Krylon Industries
- Colonial Pipeline

8-3: Target Audiences and Needs^{32/100/}

Practice Statement: An effective damage prevention education program identifies and implements a plan that addresses individual needs, including languages other than English where appropriate.

Practice Description: Identification of target audiences ensures maximum impact for the Dig Safely message. The following target audiences are identified as examples:

- Professional designers
- Surveyors
- Equipment suppliers, distributors, and rental companies
- Construction management officials
- Excavation equipment operators
- Excavation equipment rental stores
- Excavators
- Public works excavators
- Locators
- Railroads
- Participating facility owners/operators
- Non-participating facility owners/operators (i.e., not one call members)
- Agricultural industry members
- Public officials
- Planning, zoning, licensing, permitting, and code enforcement officials
- Public utility board members
- Homeowners and associations
- Schools
- Landscape companies
- Geotechnical and environments soil testing laboratories
- Insurance industry members
- Marine operators
- Children
- Property owners/tenants
- Emergency responders/local emergency planning committee members
- News media

When target audiences are identified, their specific needs can be more readily addressed. This helps identify which media (e.g., free advertising, advertising, brochures, meal meetings, handouts, door hangers, yard cards, etc.) can most effectively be used to deliver the message. This also facilitates customization of the message itself. Coordination with other strategic partners can assist in reaching the greatest number of people.

References:

- Various 811 centers, including AL, AZ, CO, CT, GA, FL, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, TX, VA, WV, and WI
- NUCA and various NUCA state chapters
- API, INGAA, and AGA member companies
- Associated General Contractors (AGC) chapters
- Door hangers from TCS Communications, LLC, of Florida
- Yard cards from Ohio Utilities Protection Service

8-4: Structured Education Programs^{65/}

Practice Statement: An effective damage prevention education program is structured to accommodate the needs of stakeholder audiences.

Practice Description: Organizations that implement damage prevention programs need flexibility in selecting communication tactics based on demographics, damage events, effectiveness measurements and other relevant factors. A wide range of methods and tools, including mailings, in-person meetings, events, mass media communications, educational videos, and electronic and social media, may be considered for damage prevention messaging. Examples for target audiences are provided below:

- **CONTRACTORS, ROAD BUILDERS and EXCAVATORS** — Local and national trade shows and state/local chapters of contractor trade associations may provide opportunities for outreach. Group meetings focused on damage prevention education conducted by vendors and 811 centers, as well as local utility coordinating committee (UCC) meetings, may also be valuable options for sharing damage prevention information. Consider educational materials that are portable and suitable for a mobile workforce.
- **FARMERS and RANCHERS** — Messages for this audience should focus on damage prevention during agricultural-related activities, such as fencing and tiling. Local agriculture extension offices and state/local chapters of agriculture trade associations may be helpful in promoting education and messaging. Local farm days and county/state fairs can provide opportunities for broader outreach.
- **SCHOOL ADMINISTRATORS** — Contacting 811 prior to any digging on school property is an important message for administrators. Arbor Day and Earth Day are natural opportunities to promote safe digging messages at schools. Boards of education and local parent/teacher organizations (PTOs) may also provide support and resources.
- **SCHOOL STUDENTS** — Schools provide an opportunity to “grow” damage prevention awareness among younger audiences and their families. School education programs, offering a damage prevention curriculum and guest speakers, provide structured learning. Local scouting troops and student clubs focused on safety, environment and civics may also provide opportunities for damage prevention education.
- **LOCATORS** — Locator training programs sponsored by 811 centers, utility operators or third-parties provide opportunities for damage prevention education. Locator trade associations and locator safety meetings may also be leveraged to provide outreach. Consider educational materials that are portable and suitable for a mobile workforce.
- **PUBLIC OFFICIALS** — Public officials can influence local damage prevention procedures in their communities. Focus messaging on suggestions for including 811 in local permitting requirements to keep communities safer. Tours of 811 centers and local utility facilities can also improve awareness among this audience.
- **EMERGENCY RESPONDERS** — Outreach to emergency responders can leverage existing public awareness programs, such as meetings with local emergency planning committees (LEPCs), local associations of fire chiefs and sheriffs, and organized group meetings. Focus messages on 811 requirements and recognizing the signs of an un-ticketed excavation, such as a lack of flags, paint or utility personnel at dig sites, to raise responder awareness of damage prevention in their communities.
- **GENERAL PUBLIC AND HOMEOWNERS** — Homeowner/neighborhood association meetings provide opportunities for sharing the damage prevention message. Also consider attending and/or exhibiting at local home and garden shows. Social media messaging may also provide options for communication of damage prevention messages to this audience.

- **MEDIA** — Promoting damage prevention through the media helps to broaden awareness. Events such as 811 Day, National Safe Digging Month and local planned events can be communicated through press releases, print, TV and radio interviews. As appropriate, media tours of operator facilities may also be useful.
- **EQUIPMENT SUPPLIERS, DISTRIBUTORS and RENTAL COMPANIES** — Equipment points of sale or points of rental provide opportunities to educate potential excavators about 811 and damage prevention. It may be helpful to provide these companies with damage prevention brochures, 811 stickers for equipment, etc., to provide “just in time” reminders about the importance of calling 811 before digging.

References:

- Various 811 centers, including AL, AZ, CO, CT, GA, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, TX, WV and WI
- Current industry materials, programs and practices
- National Land Improvement Contractors Association
- American Petroleum Institute (API), Interstate Natural Gas Association of America (INGAA), and American Gas Association (AGA) member companies
- Industry associations, including AGC chapters, NUCA, and National Telecommunications Damage Prevention Council (NTDPC)
- Various contract locating firms
- American Petroleum Institute (API) Recommended Practice (RP) 1162, “Public Awareness Programs for Pipeline Operators”

8-5: Target Mailings



Practice Statement: An effective damage prevention education program communicates vital damage prevention, safety and emergency response information to target audiences through periodic mailings.

Practice Description: Target mailings can effectively communicate essential damage prevention, safety and emergency response information.

- Direct mailings containing local information can be mailed to residents and businesses that lie within a specified area. Such mailings are especially useful for reaching those residents and businesses that are in the corridor of the underground facility or proposed excavation route. Some examples are listed below:
- Direct-mailed billing statements are ideal for including inserts provided by the 811 center because the connection between underground facilities and Dig Safely can be readily made by the consumers.
- Additionally, space for a damage prevention message can be dedicated on the facility owners/operators’ newsletters that are often included with the billing statements.
- Direct mailings, either in the form of letters or newsletters, are effective in targeting audiences such as lumber yards and stores, hardware stores, heavy equipment sellers and rental equipment stores. These mailings can offer support materials, such as point-of-purchase brochure displays for sales counters, posters for retail aisles where digging equipment is found, and key chains for rental equipment ignition keys.
- An annual excavator newsletter, originated and mailed directly by the 811 center to all identifiable excavators in the call center’s jurisdiction, keeps the customer base involved and informed of changes to the damage prevention system.
- Specialized brochures or letters can be mailed directly to address such issues as failure to follow local damage prevention laws, guidance to homeowners to understand the damage prevention process, and special requirements when excavations occur in agricultural or rural settings.

- Target mailing lists are developed using a combination of facility owners/operators' and the 811 center's internal sources, support partner mailing lists, and ZIP-code + 4/SIC code mailing lists. There are numerous software applications and databases available in the marketplace to support this.

References:

- Various 811 centers, including AL, AZ, CT, GA, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, WV and WI
- API Recommended Practice 1123
- 49 CFR Parts 192, 194, and 195

8-6: Paid Advertising



Practice Statement: An effective damage prevention education program includes paid advertising to increase damage prevention awareness and practices.

Practice Description: Paid advertising through event sponsorships, radio, television and print media is an effective means for communicating 811 center information and safe digging requirements to target audiences. Paid advertising is particularly effective for reaching general excavators, construction designers and managers, equipment operators, property owners and tenants, farmers, facility owners/operators, and the general public. However, the use of paid advertising can be very costly, and a measurement for success should be implemented early in the advertising campaign to gauge effectiveness. Measurements can include increased locate ticket volume or increased number of first-time callers to an 811 center. Additionally, creative placement of the message can ease the expense of paid advertising and enhance its effectiveness. Examples include transit system signs, sponsorship of news and weather reports on radio and television, industry trade exhibits and events, and print messages in trade publications.

References:

- Various 811 centers, including AL, CO, CT, GA, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, WV and WI
- Current facility owner practices, including various oil pipeline companies such as Marathon-Ashland Pipeline Company, Northwest Pipeline Company, and Equilon Pipeline Company

8-7: Free Media^{33/}



Practice Statement: An effective damage prevention education program utilizes all available free media.

Practice Description: When identified and used correctly, free media can be highly effective to communicate the Dig Safely message at minimal cost. For organizations with limited budgets, use of free media should be emphasized.

Press Releases: This tool is the preferred method to communicate “newsworthy” information about your damage prevention program to newspapers, trade publications and radio stations. Examples of occasions/events that are appropriate for press releases include the following:

- Call center milestones (millionth call, record month, record day)
- Year in review (call volume statistics, damage reduction/increases)
- Election of new board members
- Announcement of excavator safety program schedule
- Announcement of a new utility member
- Changes to the state/local damage prevention law
- Seasonal “call before you dig” reminders

A basic press release, containing the damage prevention message and fundamental program information, is on file for distribution to newspapers and other periodicals that often run special sections on topics such as home improvements, safety around the home and damage prevention actions related to severe weather. See Appendix C for a sample press release.

Not-for-Profit Public Service Announcements (PSAs): Television and radio stations, as well as billboard companies, often are willing to donate airtime or space for public service announcements (PSAs) to not-for-profit organizations. To qualify, the organizations must have a safety-related message that benefits the general public.

Member Facility Owners/Operators: The member facility owners/operators of the damage prevention system are, in effect, another source of free media for the Dig Safely message:

- Major facility owners/operators who purchase paid advertising on television, radio and billboards can require that free Dig Safely PSAs be included in any media buy they make.
- Cable TV members should be provided copies of any Dig Safely commercial and encouraged to run it as a PSA on their system. (Many cable members have created their own messages for this purpose!)
- All member facility owners/operators should be offered vehicle bumper stickers and posters to place on their locating and service vehicles promoting the “Call Before You Dig” phone numbers.

State/Local Government: State and local governments can be yet another source of free media for your damage prevention education program. The following are successful examples of their use:

- Use of proclamations by state and local governments to support “National Safe Digging Month.” (see Appendix C for a sample press release)
- Inclusion of safe-digging messages on state tollway/highway electronic message boards
- Damage prevention messages in community newsletters of member municipal facility operators

References:

- Various 811 centers, including AL, AZ, CO, CT, GA, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, TX, WV and WI
- Various 811 center member companies, such as Media-One, GTE, TCI Cable Co., Ameritech and others
- Proclamations from various state and local governments
- Press release from Ohio Utilities Protection Service announcing Ohio’s Safe Digging Month (see Appendix C)

8-8: Giveaways



Practice Statement: An effective damage prevention education program uses promotional giveaway items to increase damage prevention awareness.

Practice Description: Effective damage prevention education programs use giveaways to reach targeted audiences. Examples include note pads, pens, Rolodex® cards, mouse pads, ignition protectors, clipboards and magnets. Items used should reflect the unique needs and interests of the target audiences and the regions served. For example, sports towels work in many areas and with many audiences. However, beach towels are probably only effective in states or areas near beaches. Giveaways can be distributed via awareness and safety meetings, targeted mailings, sponsored events, trade shows and other methods. In all cases, items should be usable both for work and recreation.

References:

- Various 811 centers, including AL, AZ, CO, CT, GA, ID, IL, IA, KY, MS, MO, NM, NY (City), NC, OK, OH, OR, TX, WV and WI

8-9: Establishing Strategic Relationships



Practice Statement: An effective damage prevention education program establishes strategic relationships.

Practice Description: Strategic relationships can be defined as “Making Friends Before You Need Them.” This means having working relationships in place to leverage common resources. Successful damage prevention education programs establish strategic relationships with governmental agencies, emergency responders, associations of all types, media outlets, grassroots organizations and others. These relationships involve partnering to further damage prevention education efforts. One example of such strategic relationships includes partnering with the state bureau of utilities, 811 centers, OCSI members, the Equipment Manufacturers Institute (EMI) and original equipment manufacturers to install “North American Equipment Decals” on the dashboards of new excavating equipment. Another example is the One Call Systems Study (OCSS) for which this report is written. The OCSS represents the establishment of a strategic relationship among various one call systems stakeholders to further damage prevention education and awareness.

References:

- Various 811 centers, including AL, AZ, CO, CT, GA, ID, IL, IA, KY, MS, MO, NY (City), NC, OK, OH, OR, TX, WV and WI
- Illinois Commerce Commission
- Existing strategic relationships, such as APWA/AGC and API/NTDPC

8-10: Measuring Public Education Success



Practice Statement: An effective damage prevention education program includes structured annual or biennial (every two years) measurement(s) to gauge the success of the overall program.

Practice Description: Damage prevention education program effectiveness can be gauged in several ways. Consider the following examples:

- Use of a direct-mail or telephone survey to effectively determine how 811 center and/or member facility customers are hearing and recalling the damage prevention message.
- Use of Arbitron Areas of Dominant Influence (ADI) boundaries to measure increases in 811 center call volume and/or member facility owners/operators’ one call messages is also an effective measurement. For a given area, these can be compared against the money and resources used in that area for further indications of program effectiveness.
- The collection and tracking of individual or collective facility owners/operators’ damage information from year to year is another outstanding method of measuring success, providing that other internal factors at a given facility owner/operator remain constant.

References:

- Various 811 centers, including CT, GA, IL, IA, KY, MS, MO, NC, OK, OH and WI
- API Data Collection Initiative
- INGAA Foundation Pipeline Safety Awareness Material Focus Group Research Report
- “Presentation of Findings: OPS/DAMQAT Underground Facility Damage Prevention Study” (nationwide survey)
- “Presentation of Findings: DAMQAT Pilot Evaluation Study” (regional survey)
- Great Lakes Common Carrier Committee Six-State Survey

- Virginia State Corporation Commission survey on why damages occur
- PHMSA 9 Elements (PIPES ACT)

8-11: Cross Bore Determination and Mitigation^{69/}



Practice Statement: A facility owner/operator has in place a robust, proactive mitigation program to identify and mitigate cross bores where its facilities may intrude upon another owner/operator’s facility. The facility owner/operator program promotes safe mitigation of cross bores. A facility owner/operator provides a communications network as a conduit for third parties to report potential cross bores.



Practice Description: A facility owner/operator implements a program to identify and mitigate instances where its facility may intrude upon another facility owner/operator’s facility.

When a foreign object such as a conduit, cable or pipe is suspected to be within a non-pressurized underground facility, or when the operation of that facility is impaired, a report of a “potential cross bore” is placed to a centralized point of contact (communications network). The communications network may be a service sponsored by the underground facility owner/operator or the 811 center. The communications network notifies or provides the facility owner/operator’s contact information for the reported location. These reports are treated as an “emergency” under the overriding state law.

After identifying potential cross bore(s), the facility owner/operator takes appropriate action using the latest technologies to inspect the facilities. Utilizing technologies such as camera inspection both pre- and post-construction is effective in preventing new cross bores and mitigating legacy cross bores.

References:

- This practice is currently in place in multiple states/locations, including Pennsylvania, Minnesota, Virginia, Wisconsin and Washington, D.C., as well as through the regular ticket process in other states. The practice is performed in several different ways to convey a potential cross bore report to the involved party, and to prevent injury to the drain-cleaning professional and/or the property owner.

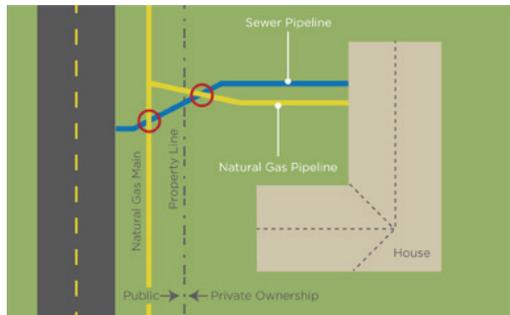

CHAPTER 9

Reporting and Evaluation



Best Practices Associated with Reporting Damage, Near Miss and Incident Data^{58/}

The following best practices related to reporting damage prevention data were reviewed by the CGA's Data Reporting & Evaluation Committee (DR&EC). Under each particular best practice is a partial list of examples identified during the creation of that best practice. Understanding this is a partial list, it should be recognized that other options may be available.

From a national data perspective, CGA stakeholders recognize the CGA DIRT tool as the most beneficial source currently available for nationwide data regarding damages, near misses and incident data.

9-1: All Stakeholders Report Information



Practice Statement: Facility owners/operators, locators, excavators or stakeholders with an interest in underground damage prevention report qualified information on events^{45/} that could have, or did, lead to a damaged underground facility.

References:

- API/Association of Oil Pipelines (AOPL) Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Florida Sunshine State One Call
- Massachusetts Department of Telecommunications and Energy
- New Hampshire Public Utilities Commission
- Pennsafe Bureau, Department of Labor and Industry
- Tennessee One Call System, Inc.
- Tierdael Construction Company — General Contractors
- U.S. Department of Transportation, Office of Pipeline Safety
- Virginia State Corporation Commission

9-2: Standardized Information Is Reported by All Stakeholders^{58/}



Practice Statement: The requested data is standardized and consists of essential information that can be analyzed to determine what events could, or did, lead to a damaged facility. This means that collected data includes damage information, downtime and near misses. All stakeholders submit the same damage, near miss and downtime data via simple answers and checkboxes. (Refer to Appendix C for example form.)

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Florida Sunshine State One Call
- Massachusetts Department of Telecommunications and Energy
- New Hampshire Public Utilities Commission
- Pennsafe Bureau, Department of Labor and Industry

- Tennessee One Call System, Inc.
- Tierdael Construction Company — General Contractors
- U.S. Department of Transportation, Office of Pipeline Safety
- Virginia State Corporation Commission

9-3: Identify the Noncompliant Stakeholder



Practice Statement: It is important to identify the noncompliant stakeholder (facility owner/operator, excavator, locator or 811 notification center) so that this group can be targeted with education and training. It may not be necessary to pinpoint the names and addresses of the offenders for the purpose of improving the damage prevention program.

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Florida Sunshine State One Call
- Massachusetts Department of Telecommunications and Energy
- New Hampshire Public Utilities Commission
- Pennsafe Bureau, Department of Labor and Industry
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-4: Person Reporting Provides Detailed Information



Practice Statement: If all of the requested data is not available, the person reporting the information provides the most complete information possible.

References:

- Consolidated Edison Company of New York, Inc.

9-5: Requested Information May Change



Practice Statement: Requested information changes as additional or different data is deemed necessary for the evaluation process. The report is revised, as needed, to adapt to the changes in the state's statutes, the evolution of industry technology and the awareness of root causes.

References:

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Massachusetts Department of Telecommunications and Energy
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-6: A Standardized Form Is Adopted



Practice Statement: A standardized form that includes the mandatory DIRT fields is adopted and distributed to all facility owners/operators, locators, excavators and other appropriate stakeholders. (Refer to Appendix C for example form)^{58/}

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.

- Massachusetts Department of Telecommunications and Energy
- NC811 DIRT Lite Form
- PA PDD (PA Damage Database)
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- United States Department of Transportation, Office of Pipeline Safety
- Virginia State Corporation Commission

9-7: The Form Is Simple



Practice Statement: Data is reported using a simple, standardized form. By limiting the number of hand-written responses, the information is easy to complete. Checkboxes or other simple answering techniques help the person reporting the information and make the evaluation process easier. (Refer to Appendix C for a example form)^{58/}

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Florida Sunshine State One Call
- Massachusetts Department of Telecommunications and Energy
- NC811 DIRT Lite Form
- PA PDD (PA Damage Database)
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- U.S. Department of Transportation, Office of Pipeline Safety
- Virginia State Corporation Commission

9-8: Training Is Provided



Practice Statement: Training and education on how and when to complete the form are made available.

References:

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.

9-9: Flexibility on Completing and Returning Form Is Provided



Practice Statement: Flexible options are provided for both completing and returning the form. This may include providing self-addressed and webpage forms, and enabling completed forms to be faxed or reported by telephone.

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Florida Sunshine State One Call
- New Hampshire Public Utilities Commission
- Pennsafe Bureau, Department of Labor and Industry
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-10: Vacant^{57/}

9-11: Stakeholders Complete the Same Form



Practice Statement: If possible, facility owners/operators, excavators, locators and anyone else involved in the damage prevention process complete the same form.

References:

- Virginia State Corporation Commission

9-12: An Organization Is Identified to Receive the Information



Practice Statement: A centralized and independent organization is identified to receive and process completed forms. DIRT is currently recognized as the national repository for housing damage data. All stakeholders submit damage, near miss and downtime data via simple answers and checkboxes. (Refer to Appendix C for example form.)^{58/}

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Florida Sunshine State One Call
- New Hampshire Public Utilities Commission
- Pennsafe Bureau, Department of Labor and Industry
- Tennessee One Call System, Inc.
- U.S. Department of Transportation, Office of Pipeline Safety
- Virginia State Corporation Commission

9-13: The Organization Is Able to Interface With All Stakeholders



Practice Statement: The organization collecting the information is able to interface with all groups to promote completion and return of completed forms.

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Massachusetts Department of Telecommunications and Energy
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.

Best Practices Associated with Evaluating Damage Prevention Data

The following best practices are related to evaluating damage prevention data and are developed by the Reporting and Evaluation Task Team. Under each best practice is a list of resources that were used as examples during the Task Team's discussions and may not be inclusive of all stakeholders that utilize the best practice.

9-14: An Organization Evaluates the Data



Practice Statement: A centralized and independent organization, such as the Data Reporting and Evaluation Committee, is identified to evaluate the completed forms and publish the data.^{58/}

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.

9-15: The Organization Has Representation from All Stakeholders



Practice Statement: An organization such as the Data Reporting and Evaluation Committee, with representation from all interested stakeholders, assists in the evaluation process.^{58/}

References:

- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-16: Data Is Used to Improve Damage Prevention Efforts



Practice Statement: The reported data is used to assess and improve underground damage prevention efforts.

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Massachusetts Department of Telecommunications and Energy
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-17: Data Is Used to Promote Underground Damage Awareness^{58/}



Practice Statement: The reported data is not used to penalize or punish; rather, it is used to promote underground damage awareness through recommended training and education.

References:

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Tennessee One Call System, Inc.

9-18: Data Is Summarized by Key Components

Practice Statement: The reported data is summarized by key components.

References:

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- Virginia State Corporation Commission

9-19: Root Causes Are Identified

Practice Statement: Root causes of events are identified.^{58/}

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- New Hampshire Public Utilities Commission
- Massachusetts Department of Telecommunications and Energy
- Virginia State Corporation Commission

9-20: Results Are Quantified Against a Standardized Risk Factor

Practice Statement: Results are quantified against a standardized risk factor. The risk factor considers a stakeholder's exposure to potential damage. This risk factor may be based on factors such as the number of miles of line installed or the number of 811 center notification tickets. For example, a risk factor may compare how many underground damages occurred in a certain time period versus the total number of notification tickets issued.

References:

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- National Transportation Safety Board Safety Study: Protecting Public Safety through Excavation Damage Prevention (NTSB/SS-97-01)

9-21: Performance Levels and Trends Are Assessed

Practice Statement: Performance levels and trends are assessed against those of other organizations.

References:

- API/AOPL Voluntary Accident Tracking Initiative
- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.

CHAPTER 10

Miscellaneous

 811 Center  Facility Owner  Excavator  Locator  Project Owner  Designer

10-1: Homeland Security



Practice Statement: Many of the recommended practices contained within the CGA's Best Practices Manual require the sharing of critical infrastructure information. This sharing is an important aspect of ensuring that parties involved with the identification of, the excavation around, and the general protection of underground facilities have adequate information to protect underground infrastructures. However, in the interest of Homeland Security, all parties must ensure that such information is shared only with individuals who truly require this critical information.

To this end, parties who employ or contract with individuals who may have access to such information should ensure that those individuals or contractors have the appropriate credentials to prevent the information from being accessed by individuals or groups that may intend to damage, alter or destroy the infrastructure in question.^{5/}

References:

- Existing state laws, including South Carolina and North Carolina

LEFT BLANK INTENTIONALLY

APPENDIX A

Glossary of Terms and Definitions

For the purpose of the Common Ground Study, a common set of definitions is used. These definitions were arrived at through a consensus process similar to the methodology used to identify the best practices.

811 Center: A communications center that administers a system through which excavators request buried facilities to be marked by owners/operators. Centers in the United States are referred to as “811 centers” due to their use of the 811 three-digit phone number. Similar centers with a variety of names exist internationally.^{75f}

Abandoned Line or Facility: Any underground or submerged line or facility no longer in use.

Alternative Dispute Resolution (ADR): Any process or procedure other than litigation that is agreed to by the disputing parties as the means for resolving a dispute, and is binding or non-binding pursuant to the agreement by the disputing parties. ADR includes, but is not limited to, advisory boards, arbitration, mini-trials, mediation, partnering and standing neutrals.

Alternative Project Delivery Methods: Infrastructure projects can be delivered through various alternative methods, including, but not limited to:

- 1: Design-Bid-Build (DBB): Traditional method where the project owner contracts separately with a designer/architect for the design phase, then with a construction contractor for the construction phase.
- 2: Design-Build (DB): A single entity is responsible for both the design and construction phases, streamlining the process and potentially reducing project duration.
- 3: Public-Private Partnership (PPP or P3): Involves collaboration between a public agency and a private sector entity to finance, design, construct, operate, and maintain infrastructure projects.
- 4: Construction Management at Risk (CMAR): The construction manager works with the project owner and designer during the design phase and then assumes responsibility for delivering the project within a guaranteed maximum price.
- 5: Build-Operate-Transfer (BOT): A private entity finances, builds, and operates a facility for a specified period before transferring ownership to the public sector.
- 6: Design-Build-Operate-Maintain (DBOM): Similar to BOT, but the private entity also operates and maintains the facility after construction.
- 7: Progressive Design-Build (PDB): PDB uses a qualifications-based or best value selection, followed by a process whereby the owner then “progresses” towards a contract price with the team (thus the term “Progressive”).

Each method has its own advantages and challenges, and the choice often depends on project requirements, risk allocation preferences, and funding mechanisms.^{102f}

As-built Drawing: A detailed depiction of facilities as installed in the field.

Attribute: Characteristic that helps describe the data.

Backfill: To fill the void created by excavating.

Business Day (or Working Day): Any day of the week except Saturday and Sunday and state/provincial and federal legal holidays.

Cathodic Protection: The process of arresting corrosion on a buried or submerged structure by electrically reversing the natural chemical reaction.

This includes, but is not limited to, installation of a sacrificial anode bed, use of a rectifier-based system, or any combination of these or other similar systems. Wiring is installed between the buried or submerged structure and all anodes and rectifiers; wiring is also installed to test stations that are used to measure the effectiveness of the cathodic protection system.

Compliance: Adherence to the statute and its regulations.

Cross Bore: An intrusion of an existing underground utility or underground structure by a second utility, resulting in direct contact between the transactions of the utilities that compromises the integrity of either the utility or underground structure.^{69/}

Damage: Any impact or exposure that results in the need to repair an underground facility due to a weakening or the partial or complete destruction of the facility, including, but not limited to, the protective coating, lateral support, cathodic protection, or housing for the line, device or facility.

Damage Reporting: The immediate reporting to an 811 center and the facility owner/operator of any damage caused or discovered in the course of excavation or demolition work; to immediately alert the occupants of premises as to any emergency that such person may create or discover at or near such premises; to contact emergency responders, if necessary, as quickly as practical.

Demolition Work: The partial or complete destruction by any means of a structure served by, or adjacent to, an underground line or facility.

Designer: Any architect, engineer or other person who prepares or issues a drawing or blueprint for a construction or other project that requires excavation or demolition work.

Digital Imagery: A computer-compatible version of land-related information including, for example, topography, physical features, road/street networks and buried facility networks obtained from a variety of sources including, for example, aerial photographs, satellite photographs, road maps, survey plans and buried facility records.^{31/}

Downtime: Lost time reported by a stakeholder on the Damage Information Reporting Tool (DIRT) field form for an excavation project due to failure of one or more stakeholders to comply with applicable damage prevention regulations.^{51/}

Electronic Positive Response: Communication by telephone, fax, email or internet from a facility owner/operator to an excavator providing the status of an owner/operator's statutorily required response to a notice of intent to excavate.^{42/}

Electronic White Lining (EWL): The process in which an excavator identifies where proposed excavation will occur by drawing a polygon shape on a GIS map; that shape is delivered electronically by the 811 center to its member facility operators.^{80/}

Emergency: A sudden or unforeseen occurrence involving a clear and imminent danger to life, health or property; the interruption of essential utility services; or the blockage of transportation facilities that requires immediate action.

Emergency Notice: A communication to the 811 center to alert the involved underground facility owners/operators of the need to excavate as a result of a sudden or unforeseen occurrence or national emergency involving a clear and imminent danger to life, health, environment or property (including the interruption of essential utility services or the blockage of transportation facilities) that requires immediate excavation.

Emergency Response: A facility owner/operator's response to an emergency notice.

Event: The occurrence of facility damage, near miss or downtime.

Excavate or Excavation: Any operation using non-mechanized or mechanized equipment, demolition or explosives in the movement of earth, rock or other material below existing grade.^{50/}

Excavator: Any person proposing to or engaging in excavation or demolition work for himself or for another person.

Extraordinary Circumstances: Circumstances other than normal operating conditions which exist and may make it impractical or impossible for a facility owner/operator or their contract locator to comply with state or provincial damage prevention laws. Such extraordinary circumstances may include, but shall not be limited to, hurricanes, tornadoes, floods, ice and snow, and other acts of God.^{138/}

Facility: An underground or submerged conductor, pipe, or structure used to provide electric or communications service (including, but not limited to, traffic control loops and similar underground or submerged devices); or an underground or submerged pipe used in carrying, providing, or gathering (typically between the wellhead and transmission line) gas, oil or oil product, sewage, storm drainage, steam, water, or other substance, and appurtenances thereto.^{26/137/}

Facility Owner/Operator: Any utility, municipality, authority, political subdivision, or other person or entity who owns, operates, or controls the operation of an underground life/facility.^{137/}

Geographic Information System (GIS): An organized collection of computer hardware, software and geographic data used to capture, store, update, maintain, analyze and display all forms of geographically referenced information.

Geospatial Data: Data that identifies the geographic location and characteristics of natural or constructed features and boundaries on the earth.

Global Positioning System (GPS): A system consisting of 25 satellites used to provide precise position, velocity and time information to users anywhere on Earth. Location information can be received using a GPS receiver. The GPS receiver helps determine locations on the earth's surface by collecting signals from three or more satellites through a process called triangulation. Simple and inexpensive hand-held receivers provide an accuracy of ± 100 meters of a true position. More sophisticated receivers that use additional technologies or that post-process the original GPS data can provide sub-meter accuracy.

Grade: The surface of the earth (i.e., ground level) upon which a structure is built or prepared.

Grounding Systems: A system of one or more ground conductors or ground rods providing a low-resistance path-to-earth ground potential through a mechanical connection to structures, conductors and equipment.

Joint Trench: A trench containing two or more facilities that are buried together by design or agreement.^{52/}

Land Base: Mapped data that depicts features of the surface of the earth and is tied to real-world geographic coordinates, such as latitude and longitude.

Large/Complex Project: A single project, or a series of repetitive, small, short-term projects that are related in scope, that impact facilities over a long period of time or a large area.^{30/}

Latitude (Lat): Distance measured north or south of the equator.

Line: See "Geographic Information System (GIS)."

Locate: To indicate the existence of a line or facility by establishing a mark through the use of stakes, paint, flagging, whiskers or some other customary manner that approximately determines the location of that line or facility.^{44/}

Locate Request: A communication between an excavator and 811 center personnel in which a request for locating underground facilities is processed.

Locator: A person whose job is to locate lines or facilities.^{47/}

Longitude (Long): Distance measured east or west from a reference meridian (Greenwich).

Marking Standards: The methods by which a facility owner/operator indicates its line or facility in accordance with the APWA guidelines. (See Appendix B, "Uniform Color Code and Marking Guidelines.")

Member Database: Structured collection of data defined for a particular use, user, system or program; it may be sequential, network, hierarchical, relational or semantic.

Membership: Persons who participate in an 811 center because they have a statutory responsibility to protect lines or facilities, or because they have an interest in the protection of lines or facilities.^{137/}

Minor or Routine Maintenance of Transportation Facilities: The adding of granular material to unpaved roads, road shoulders, airport runways, airport taxiways and railroad roadbeds; removal and application of patches to the surface of paved roads, runways and taxiways; cleaning and sealing road, airport and canal lock facility cracks or joints; replacing railroad ties and related appliances, excluding road crossings; adjusting ballast on top of railroad roadbed; cleaning of paved drainage inlets and paved ditches or pipes.

Near Miss: An event where damage (as defined on page 91) did not occur, but a clear potential for damage was identified.^{43/}

Notice: The timely communication by the excavator/designer to the 811 center that alerts the involved underground facility owners/operators of the intent to excavate.

Notification Period: The time beginning when notice is given and ending when the work may begin.

One Call Center: See “811 Center.”

Orthophoto: An aerial photograph of a site that has been differentially rectified to correct the distortion caused by the terrain and attitude (tip, tilt and yaw) of the camera. A multicolored, distortion-free, photographic image.

Person: Any individual or legal entity, public or private.

Planning: An activity at the beginning of a project where information is gathered and decisions are made regarding the route or location of a proposed excavation based on constraints, including the locations of existing facilities, anticipated conflicts and the relative costs of relocating existing facilities, or more expensive construction for the proposed facility.

Plat: A map or representation on paper of a piece of land subdivided into lots, with streets, alleys, etc., usually drawn to a scale.

Positive Response: Communication with the excavator prior to excavation to ensure that all contacted (typically via the 811 centers) owners/operators have located their underground facilities and have appropriately marked any potential conflicts with the areas of planned excavation.

Pothole (a.k.a., test hole): Exposure of a facility by safe excavation practices to ascertain the precise horizontal and vertical position of underground lines or facilities. Accepted safe excavation practices vary by state/local jurisdiction, but the preferred techniques include hand digging with extreme caution and/or vacuum excavation. (See Best Practice 5-32).^{86/}

Pre-marking or Positive Site Identification: The marking of the proposed excavation site/work area consistent with APWA guidelines.

Private Service Line: A buried facility/line wholly owned and operated on private property by an entity or individual who is not in the business of providing a product or service via that buried facility/line.^{71/}

Project Owner: The person financially responsible for the undertaking of a project that involves excavation or demolition.^{27/}

Public: The general population or community at large.^{28/}

Railroad Operating Corridor: The property that is essential to a railroad company to enable it to discharge its function and duties as a common carrier by rail. It includes the roadbed, right of way, tracks, bridges, stations and such like property.^{29/}

Root Cause: The primary reason an event occurred.^{48/}

Subsurface Utility Engineering (SUE): An engineering process for accurately identifying the quality of underground utility information needed for excavation plans, and for acquiring and managing that level of information during the development of a project.

Test Hole: See definition for "Pothole." ^{86/}

Ticket Number: A unique identification number assigned by the 811 center to each locate request. ^{49/}

Tolerance Zone: The space in which a line or facility is located and in which special care is to be taken.

Vacuum Excavation: A means of soil extraction through vacuum; water or air jet devices are commonly used for breaking the ground. ^{38/}

Waterway: Any body of water that meets one or more of the following criteria:

- Is subject to the ebb and flow of the tide
- Is used or has been used in the past to transport interstate or foreign commerce
- Any body of water under which at least 100 feet of a single facility is submerged permanently and not as a result of flooding or similar conditions where water is expected to recede
- See Best Practice 4-20: A ^{136/}

LEFT BLANK INTENTIONALLY

APPENDIX B

Uniform Color Code and Marking Guidelines

The information contained in this appendix is intended to supplement information for existing practices found within CGA Best Practices.^{8/}

BEST PRACTICES CHAPTER 4 — LOCATING AND MARKING

Practice Statement 4-3: Color Code: A uniform color code and set of marking symbols is adopted nationwide.

Uniform Color Code^{9/}

The following APWA uniform color code (ANSI Z535.1) shall be adopted as the uniform color code for marking excavation sites and underground facilities in conflict with an excavation. This recommendation is not intended to preempt any existing state requirement that specifies other colors.

White	Proposed Excavation
Pink	Temporary Survey Markings
Red	Electric Power Lines, Cables, Conduit, and Lighting Cables
Yellow	Gas, Oil, Steam, Petroleum, or Gaseous Materials
Orange	Communication, Alarm or Signal Lines, Cables, or Conduit
Blue	Potable Water
Purple	Reclaimed Water, Irrigation, and Slurry Lines
Green	Sewers and Drain Lines

References:


- APWA Uniform Color Code
- Existing operating practices from various states' 811 centers
- Existing 811 laws from various states
- ANSI Standard Z535.1 Safety Color Code

BEST PRACTICES CHAPTER 5 — EXCAVATION

Practice Statement 5-19: Excavation Tolerance Zone: The excavator observes a tolerance zone that is comprised of the width of the facility plus 18 in. on either side of the outside edge of the underground facility on a horizontal plane. This practice is not intended to preempt any existing state/provincial requirements that currently specify a tolerance zone of more than 18 in.

Tolerance Zone^{40/}

The following examples are of tolerance zones for a 1 in. and 12 in. line:

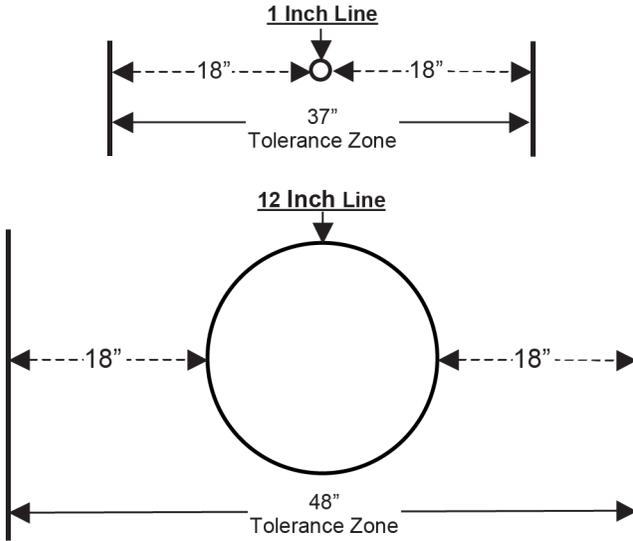


BEST PRACTICES CHAPTER 5 — EXCAVATION

Practice Statement 5-2: White Lining^{67/}: When the excavation site cannot be clearly and adequately identified on the locate ticket, the excavator designates the route and/or area to be excavated using white pre-marking, either onsite or electronically (when available through the 811 center), prior to or during the request for the locate ticket.


Guidelines for Excavation Delineation^{9/}

The following marking illustrations are examples of how excavators may choose to mark their area of proposed excavation. The use of white marking products (e.g., paint, flags, stakes, whiskers or a combination of these) may be used to identify the excavation site.

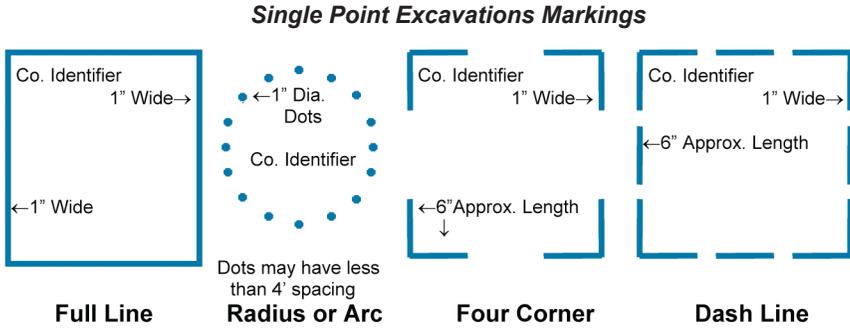


Delineate in white^{62/} the proposed area of excavation using a continuous line, dots marking the radius or arcs, dashes marking the four corners of the project, or dashes outlining the excavation project. Limit the size of each dash to approximately 6 in. to 12 in. long and 1 in. wide with interval spacing approximately 4 ft. to 50 ft. apart. Reduce the separation of excavation marks to a length that can reasonably be seen by the operator's locators when the terrain at an excavation site warrants. Dots of approximately 1 in. diameter typically are used to define arcs or radii and may be placed at closer intervals in lieu of dashes.

Single Stake Marking Center Point of Excavation Site

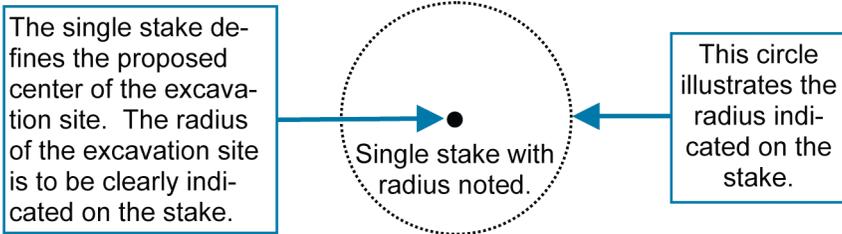

When an excavation site is contained within a 50 ft. maximum radius or less, it can be delineated with a single stake that is positioned at the proposed center of the excavation. If the excavator chooses this type of delineation, they must convey that they have delineated the excavation site with a single stake at the center of the excavation and include the radius of the site in the notification to the 811 center. This single stake is white in color and displays the excavator's company identifier (name, abbreviations or initials) and the radius of the excavation site in black letters on the stake or with a notice attached to the stake.

Trenching, Boring or Other Continuous-Type Excavations

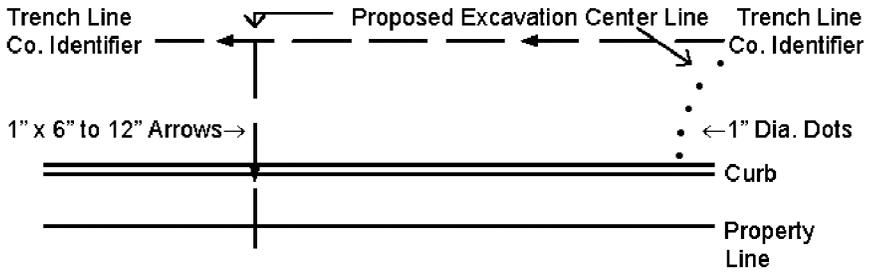

Continuous Excavation Marking


Mark in white^{62/} the proposed centerline of planned excavation using 6 in. to 12 in. x 1 in. arrows approximately 4 ft. to 50 ft. apart to show direction of excavation. Reduce the separation of excavation marks to a length that can reasonably be seen by the operator’s locators when the terrain at an excavation site warrants. Mark lateral excavations with occasional arrows showing excavation direction from centerline with marks at curb or property line if crossed. Dots may be used for curves and closer interval marking.

Stake, Flag or Whisker Excavation Markers



Delineate the proposed area of excavation using stakes, flags or whiskers instead of spray paint to mark radius or arcs, the four corners of the project, or when outlining the excavation project. Limit the interval spacing to approximately 4 ft. to 50 ft. Reduce the separation of excavation marks to a length that can reasonably be seen by the operator’s locators when the terrain at an excavation site warrants. Stakes, flags or whiskers provided to illustrate arcs or radii may be placed at closer intervals to define the arc or radius. Stakes, flags or whiskers are white in color and display the excavator’s company identifier (name, abbreviations or initials).


H) to indicate there is only one facility:

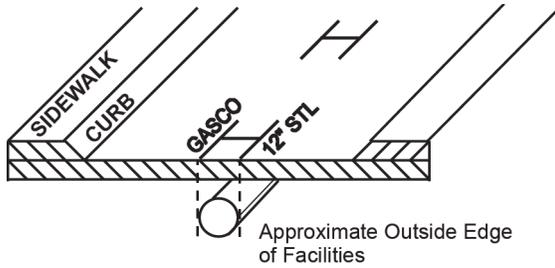

These examples indicate an operator's 12 in. facility. When a facility can be located or toned separately from other facilities of the same type, it is marked as a single facility.^{41/}


- b. **Multiple Facility Marking:** Used to mark multiple facilities of the same type (e.g., electric), where the separation does not allow for a separate tone for each facility, but the number and width of the facilities is known. Marks are placed over the approximate center of the facilities and indicate the number and width of the facilities.

Example: four plastic facilities that are 4 in. in diameter (4/4" PLA)

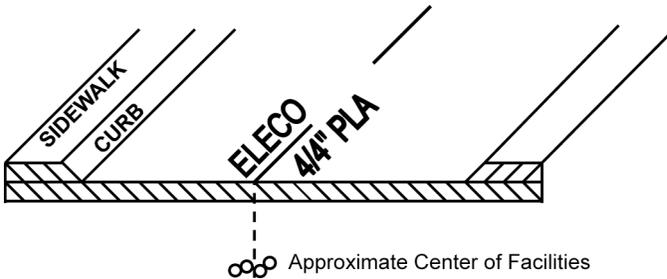


- c. **Conduit Marking:** Used for any locatable facility being carried inside conduits or ducts. The marks indicating the outer extremities denote the actual located edges of the facilities being represented.

Example: four plastic conduits that are 4 in. in diameter (4/4" PLA), and the marks are 16 in. apart, indicating the actual left and right edges of the facilities

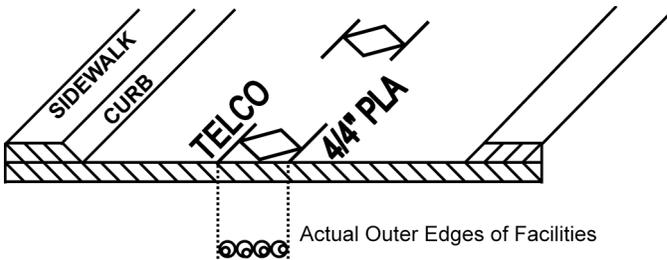


- d. **Corridor Marking:** Used to mark multiple facilities of the same type (e.g., electric), bundled or intertwined in the same trench, where the total number of facilities is not readily known (operator has no record on file for the number of facilities). Marks are placed over the approximate center of the facilities and indicate the width of the corridor. The width of the corridor is the distance between the actual located outside edges of the combined facilities.

Example: a 12 in. corridor (12" CDR)

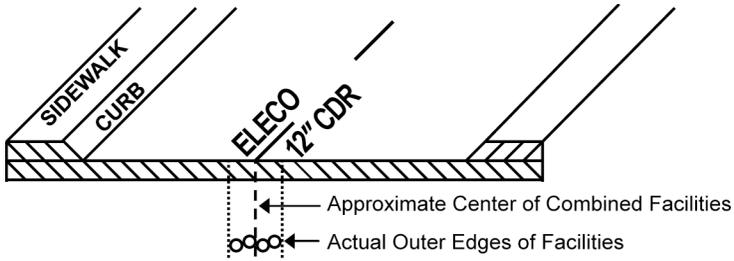


- Changes in direction and lateral connections are clearly indicated at the point where the change in direction or connection occurs, with an arrow indicating the path of the facility. A radius is indicated with marks describing the arc. When providing offset markings (paint or stakes), show the direction of the facility and distance to the facility from the markings.


Example: radius

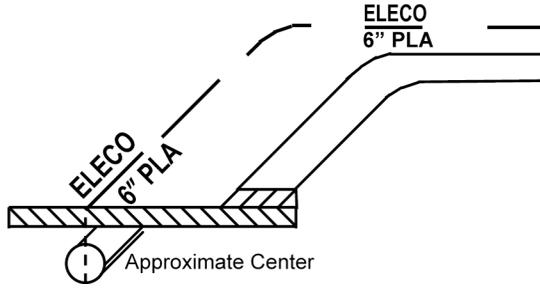


Example: lateral connection

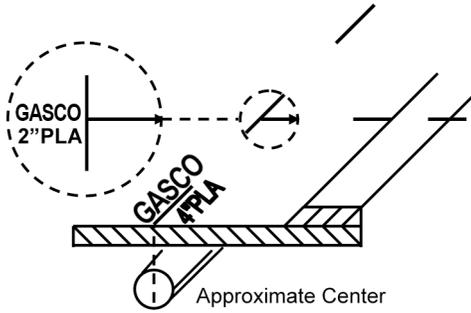

Example: painted offset (off)

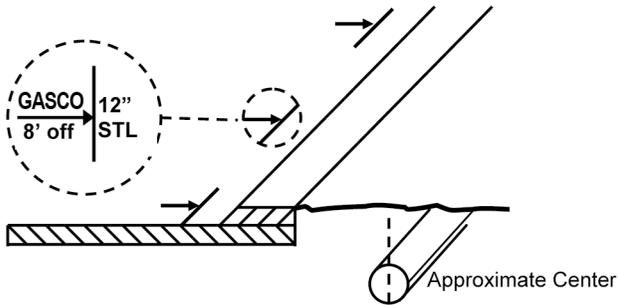

Example: staked offset (off)

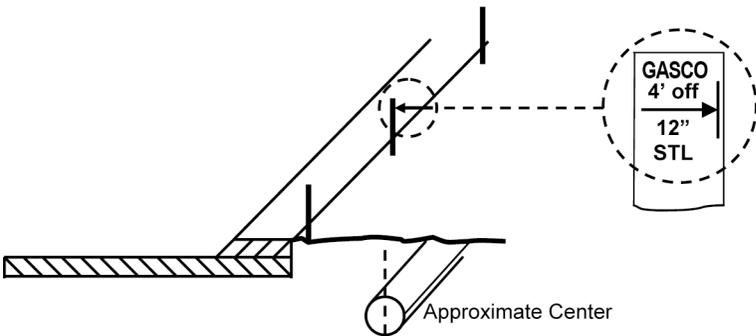

- An operator's identifier (name, abbreviation or initials) is placed at the beginning and at the end of the proposed work. In addition, subsequent operators using the same color mark their company identifier at all points where their facility crosses another operator's facility using the same color. Reduce the separation of excavation marks to a length that can reasonably be seen by the operator's locators when the terrain at an excavation site warrants.

Examples:

CITYCO ELECO TELCO

- Information regarding the size and composition of the facility is marked at an appropriate frequency.

Examples: the number of ducts in a multi-duct structure, width of a pipeline, and whether it is steel, plastic, cable, etc.

TELCO GASCO WATERCO
9/4" CAB 4" PLA 12" STL


- Facilities installed in a casing are identified as such.

Examples: 6 in. plastic in 12 in. steel and fiber optic in 4 in. steel

GASCO TELCO
6" PLA/12" STL FO (4" STL)

- Structures such as vaults, inlets and lift stations that are physically larger than obvious surface indications are marked so as to define the parameters of the structure.

Example:

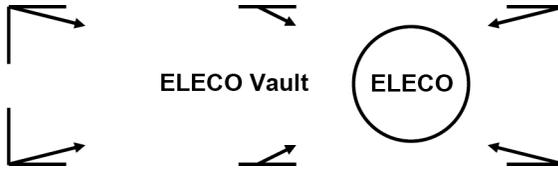

- Termination points or dead ends are indicated as such.

Example:



- When there is "No Conflict" with the excavation, complete one or more of the following:

- Operators of a single type of facility (e.g., TELCO) mark the area "NO" followed by the appropriate company identifier in the matching APWA color code for that facility.

Example: NO TELCO

- Operators of multiple facilities mark the area "NO" followed by the appropriate company identifier in the matching APWA color code for that facility with a slash and the abbreviation for the type of facility for which there is "No Conflict."

Example: NO GASCO/G/D illustrates that GASCO has no gas distribution facilities at this excavation site. The following abbreviations are used when appropriate: /G/D (gas distribution); /G/T (gas transmission); /E/D (electric distribution); /E/T (electric transmission).

- Place a clear plastic (translucent) flag that states "No Conflict" in lettering matching the APWA color code of the facility that is not in conflict. Include on the flag the operator's identifier, phone number, a place to write the


locate ticket number and date. Operators of multiple facilities indicate on the flag which facilities are in “No Conflict” with the excavation (see the previous example).

- If it can be determined through maps or records that the proposed excavation is obviously not in conflict with their facility, the locator or operator of the facility may notify the excavator of “No Conflict” by phone, fax or email, or through the 811 center, where electronic positive response is used. Operators of multiple facilities indicate a “No Conflict” for each facility (see the previous examples).
- Place “No Conflict” markings or flags in a location that can be observed by the excavator and/or notify the excavator by phone, fax or email that there is “No Conflict” with your facilities. When the excavation is delineated by the use of white markings, place “No Conflict” markings or flags in or as near as practicable to the delineated area.

Caution: Allow adequate space for all facility mark-outs.

“No Conflict” indicates that the operator verifying the “No Conflict” has no facilities within the scope of the delineation; or when there is no delineation, there are no facilities within the work area as described on the locate ticket.

Example:

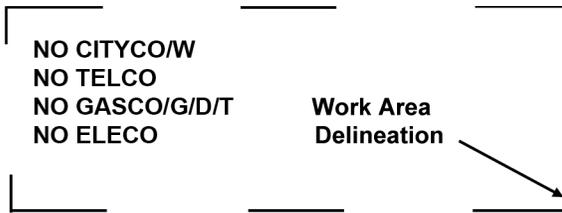

Color Code Identifiers

White	Proposed Excavation
Pink	Temporary Survey Markings
Red	Electric Power Lines, Cables, Conduit, and Lighting Cables
Yellow	Gas, Oil, Steam, Petroleum, or Gaseous Materials
Orange	Communication, Alarm or Signal Lines, Cables, or Conduit
Blue	Potable Water
Purple	Reclaimed Water, Irrigation, and Slurry Lines
Green	Sewers and Drain Lines

Common Abbreviations

Facility Identifier

CH	Chemical
E	Electric
FO	Fiber Optic
G	Gas
LPG	Liquefied Petroleum Gas
PP	Petroleum Products
RR	Railroad Signal
S	Sewer
SD	Storm Drain
SS	Storm Sewer
SL	Street Lighting
STM	Steam
SP	Slurry System
TEL	Telephone
TS	Traffic Signal
TV	Television
W	Water
W	Reclaimed Water "Purple"

Underground Construction Descriptions

C	Conduit
CDR	Corridor
D	Distribution Facility
DB	Direct Buried
DE	Dead End
JT	Joint Trench
HP	High Pressure
HH	Hand Hole
MH	Manhole
PB	Pull Box
R	Radius
STR	Structure (vaults, junction boxes, inlets, lift stations)
T	Transmission Facility

Infrastructure Material

ABS	Acrylonitrile - Butadiene - Styrene
ACP	Asbestos Cement Pipe
CI	Cast Iron
CMC	Cement Mortar Coated
CML	Cement Mortar Lined
CPP	Corrugated Plastic Pipe
CMP	Corrugated Metal Pipe
CU	Copper
CWD	Creosote Wood Duct
HDPE	High Density Polyethylene
MTD	Multiple Tile Duct
PLA	Plastic (conduit or pipe)
RCB	Reinforced Concrete Box
RCP	Reinforced Concrete Pipe
RF	Reinforced Fiberglass
SCCP	Steel Cylinder Concrete Pipe
STL	Steel
VCP	Vitrified Clay Pipe

Guide for Abbreviation Use

Follow these guidelines when placing abbreviations in the field:

- Place the Company Identifier at the top or at the left of the abbreviations.
- Place the abbreviations in the following order: Company Identifier / Facility Identifier / Underground Construction Descriptions / Infrastructure Material

Example: TELCO/TEL/FO/PLA indicates that TELCO has a telecommunication fiber optic line in a single plastic conduit. The use of the abbreviation /TEL is not necessary, because the orange marking would indicate that the facility was a communication line; but its use is optional.

- To omit one or more of the abbreviation types, use the order described above but omit the slash and abbreviation that does not apply.

Example: to omit /TEL), the result would be TELCO/FO/PLA.

Guidelines for Underground Electronic Utility Marker Technology^{74/}

Underground electronic utility markers incorporate unique frequencies and/or data transfer capabilities to identify an underground asset. In general, radio frequency identification (RFID) has been in use for a few decades and incorporates unique frequencies for each type of utility; this allows locators and operators to identify specific types of underground utilities. Data-transfer RFID allows users to write to and read information from the marker. Advantages of utility-specific frequency RFID markers include greater depth of detection, no need to read data to identify a utility type, and tradition of use. Advantages of data-transfer RFID markers include utility agnosticism (does not require different frequencies to communicate utility type) and ability to write and read specific underground utility information from the marker.

Underground electronic utility markers fall into two primary use case categories: point marking and path marking. Both device types generate an electromagnetic radio frequency to provide accurate location information. Point markers are installed along the vertical axis to identify the specific location of an underground facility feature, component or utility type. Path markers are installed along the horizontal axis along a buried underground facility and provide a running line direction and location of an underground utility. Examples of point markers include: ultra-high frequency (UHF) RFID subsurface tags, high frequency (HF) subsurface markers, UHF RFID magnets, active UHF RFID subsurface tags, marker balls, disk markers, near surface markers, full range markers, mini markers, box markers, tap tee markers, duct markers, and RFID tags. Path markers include intrinsically locatable plastic pipe, UHF RFID tape and rope, and HF RFID tape and rope.

Facility owners/operators consider several factors associated with the installation, location and data integration of electronic markers, including the following:

Installation Factors

- Signal drift, burial depth and power loss over time due to changing environmental conditions
- Signal loss that occurs with distance traveled
- Electronic markers’ operating specifications to maximize underground facility and marker lifetime
- Ease of integration with other systems

According to VDOT’s paper, Electronic RFID Marking and GPS Based Utility As-Built Mapping System, additional potential spacing protocols for electronic point maker placement for new construction are:

- Every 25 ft. along the facility path
- At significant horizontal and vertical changes in direction
- At critical utility crossings, tees and service connection
- On appurtenances that are important to the utility owner

Location Factors

The quality of the locating frequency may deteriorate if the underground utility marker is adjacent to a plurality of underground facilities with underground utility markers operating at a similar frequency. The following potentially applicable point marker locating frequencies, according to VDOT’s paper (Electronic RFID Marking and GPS Based Utility As-Built Mapping System), can be used to avoid signal interference and identify and locate a specific utility type. The verification frequency associated with the RFID tag can vary.

Commonly-Used Frequencies for Various Underground Electronic Utility Markers

Underground Facility	Point Frequencies	Path Frequencies	US UHF RFID
Power	169.8 kHz	34.9kHz	902-928 MHz
Water	145.7 kHz	73.5kHz	902-928 MHz
Wastewater	121.6 kHz	41.4kHz	902-928 MHz
Telecommunication	101.4 kHz	48.8kHz	902-928 MHz
Gas	83 kHz	53.9kHz	902-928 MHz
Cable TV and Communications	77 kHz	48.8 kHz	902-928 MHz
General Purpose/Reclaimed Water	66.35 kHz	44.9 kHz	902-928 MHz

Data Integration Factors

Additional factors are related to the storage and labeling of data tagged to an underground utility marker via RFID technology, including:

- Information to be stored with the unique identifier
- Metadata template definition and creation to promote data collection consistency and underground utility marker operation across varying technology solutions
 - Sample data elements to collect may include: asset type, asset material, asset class, asset owner, burial depth, latitude/longitude, EM manufacturer and emergency contact information.
- Underground utility marker with RFID tagging integration into routine QLA investigations (subsurface utility engineering quality level) to label the location and burial distance of the exposed pipe

APPENDIX C

Sample Forms, Reports and Releases

During the Common Ground Study, the Reporting and Evaluation Task Team drafted a sample report form (originally referred to as figure 9-1) to demonstrate what may be reported when collecting damage prevention information. The team created this sample form (illustrated on the following page) using the best practices from 811 center, regulatory agency, facility, locator, excavator and industry group report forms. The form was created to enable data collection from all stakeholders involved in the damage prevention process, including facility owners/operators, excavators and locators.

Appendix C Sample Form

The 9-1 form was the basis for the development of the CGA's Damage Information Reporting Tool (DIRT) launched in December 2003. The Data Reporting & Evaluation Committee approved minor modifications to the original 9-1 form when creating DIRT. These modifications were later approved by the CGA Best Practices Committee. The approved DIRT form has been included in Appendix C. To review the electronic version and tool, visit <https://form.cga-dirt.com>.

References:

The following references were used as examples during the Task Team's discussions and the development of the composite 9-1 reporting form. These sources do not include all stakeholders that may report any of the same information shown on the sample form.

- Connecticut Department of Public Utility Control/Call Before You Dig, Inc.
- Consolidated Edison Company of New York, Inc.
- Florida Sunshine State One Call
- Massachusetts Department of Telecommunications and Energy
- National Transportation Safety Board Safety Study: Protecting Public Safety Through Excavation Damage Prevention (NTSB/SS-97-01)
- New Hampshire Public Utilities Commission
- Tennessee One Call System, Inc.
- Tierdael Construction Company — General Contractors
- Virginia State Corporation Commission

Sample Form for Reporting Data

PART E – NOTIFICATION AND LOCATING

*Was the 811/One Call Center notified of intent to excavate? Yes No **Ticket Number:**

*If yes, type of locator: Facility Owner Contract Locator

If no, is excavation activity and/or excavator type exempt from notification? Yes No

Was work area white-lined? Yes No Unknown

PART G – EXCAVATOR DOWNTIME

Did excavator incur down time? Yes No

If yes, how much time? < 1 hr 1 - <2 hrs 2 - <3 hrs 3+ hrs Unknown **Exact duration in hours:**

Estimated cost of down time? \$0 \$1-1000 \$1,001-5,000 \$5,001-25,000 \$25,001-50,000 >\$50,000 Unknown

Exact estimated cost:

PART H – INTERRUPTION AND RESTORATION

*Did the damage cause an interruption in service? Yes No Unknown

If yes, duration of interruption < 1 hr 1 - <6 hrs 6 - <12 hrs 12 - <24 hrs 24 - <48 hrs 48+ hrs Unknown

Exact duration in hours:

Approximately how many customers were affected? 0 1 2-10 11-50 51+ Unknown **Exact #:**

Estimated cost of damage/repair/restoration: \$0 \$1 - 1,000 \$1,001- 5,000 \$5,001 - 25,000 \$25,001 - 50,000 > \$50,000 Unknown **Exact estimated cost:**

***PART I – ROOT CAUSE** *Select only one!*

<p>Notification Issue</p> <ul style="list-style-type: none"> <input type="checkbox"/> No notification made to One Call Center/811 <input type="checkbox"/> Excavator dug outside area described on ticket <input type="checkbox"/> Excavator dug prior to valid start date/time <input type="checkbox"/> Excavator dug after valid ticket expired <input type="checkbox"/> Excavator provided incorrect notification information <p>Excavation Issue</p> <ul style="list-style-type: none"> <input type="checkbox"/> Excavator dug prior to verifying marks by test-hole (pot-hole) <input type="checkbox"/> Excavator failed to maintain clearance after verifying marks <input type="checkbox"/> Excavator failed to protect/shore/support facilities <input type="checkbox"/> Improper backfilling practices <input type="checkbox"/> Marks faded or not maintained <input type="checkbox"/> Improper excavation practice not listed above 	<p>Locating Issue</p> <p><i>Facility not marked due to:</i></p> <ul style="list-style-type: none"> <input type="checkbox"/> Abandoned facility <input type="checkbox"/> Incorrect facility records/maps <input type="checkbox"/> Locator error <input type="checkbox"/> No response from operator/contract locator <input type="checkbox"/> Incomplete marks at damage location <input type="checkbox"/> Tracer wire issue <input type="checkbox"/> Unlocatable Facility <p><i>Facility marked inaccurately due to:</i></p> <ul style="list-style-type: none"> <input type="checkbox"/> Abandoned facility <input type="checkbox"/> Incorrect facility records/maps <input type="checkbox"/> Locator error <input type="checkbox"/> Tracer wire issue <p>Miscellaneous Root Causes</p> <ul style="list-style-type: none"> <input type="checkbox"/> One Call Center Error <input type="checkbox"/> Deteriorated facility <input type="checkbox"/> Previous damage <input type="checkbox"/> Root Cause not listed (<i>comment required</i>)
--	--

PART J – ADDITIONAL COMMENTS

PAGE 2

Starting with 2018 data, all submissions should use the new field form outlined above. Please visit <https://form.cga-dirt.com> for additional details and to access the updated field form.

BEST PRACTICES CHAPTER 8 — PUBLIC EDUCATION AND AWARENESS

Practice Statement 8-7: Free Media^{33/}: An effective damage prevention education program utilizes all available free media.

Sample Press Release

For Immediate Release

GOV. STRICKLAND PROCLAIMS APRIL AS SAFE DIGGING MONTH IN OHIO

Ohio Utilities Protection Service reminds local residents to call before all digging projects

Youngstown, Ohio (April 1, 2009) — Gov. Ted Strickland issued a proclamation announcing his support for National Safe Digging Month in April. The proclamation reminds Ohio do-it-yourself homeowners to call the Ohio Utilities Protection Service (O.U.P.S.) before starting any outdoor digging projects.

April marks the start of spring digging season, so O.U.P.S. and Gov. Strickland are encouraging homeowners to call O.U.P.S. before they dig to prevent injuries, property damage and inconvenient outages. Failure to call before digging results in Americans unintentionally hitting underground utility lines more than 200,000 times annually, which can lead to injury, penalties, repair costs, and inconvenient outages.

When calling 800-362-2764 or 8-1-1, homeowners are connected to O.U.P.S., which notifies the appropriate utility companies of the intent to dig. Professional locators are sent to the requested digging site to mark the approximate locations of underground lines with flags or spray paint. Once lines have been marked, digging can begin around marked lines.

“We strongly encourage individuals and companies to call O.U.P.S. before they begin digging,” said Abby Dornon, Public Relations and Communications Coordinator for the Youngstown-based center. “By marking underground lines, homeowners are eliminating the risk of striking a line, ultimately avoiding injury and inconvenient outages.”

Striking a single line can cause injury, repair costs, fines and inconvenient outages. Every digging project no matter how large or small necessitates a call to 800-362-2764 or 8-1-1. Installing a mailbox, putting in a fence, building a deck and laying a patio are all examples of digging projects that need a call to O.U.P.S. before starting.

Visit www.oups.org for more information about the call-before-you-dig process.

About the Ohio Utilities Protection Service

The Ohio Utilities Protection Service (O.U.P.S.), located in Youngstown, Ohio, is a non-profit corporation established to serve as a notification center that takes information from persons engaging in excavation activities and distributes this information to its utility members.

The Ohio Utilities Protection Service’s mission is to provide a quality one call process to protect the public, protect the underground infrastructure and protect the environment. Serving the entire state, O.U.P.S. processes more than one million calls annually.

It is the law in Ohio (sections 3781.25 to 3781.32 of the revised code) to contact a one call center before digging.

APPENDIX D

Additional References and Endnotes

Additional References

The references contained in Appendix D are intended to be supplemental references for existing and/or new practices found within the CGA Best Practices.

Trenchless Excavation

Chapter 2: Practice Statement 2-13

Chapter 4: Practice Statement 4-19

Chapter 5: Practice Statement 5-29

References

American Gas Association (AGA), "Directional Drilling Damage Prevention Guidelines for the Natural Gas Industry," Technical Note, December 30, 2004.

American Society of Civil Engineers, ASCE Manuals and Reports on Engineering Practice No. 89, "Pipeline Crossings," 1996.

Bennett, R.D., S.T. Ariaratnam, and C. Como, "Horizontal Directional Drilling Good Practices Guidelines," HDD Consortium, Washington, DC, ISBN 1-928984-13-4, 2001.

California Department of Transportation, CALTRANS, "CALTRANS Encroachment Permits — Guidelines and Specifications for HDD Installations," July 14, 2003.

Directional Crossing Contractors Association (DCCA), "Guidelines for Successful Directional Crossing Survey Standards," Dallas, TX, 1999.

Directional Crossing Contractors Association (DCCA), "Horizontal Drilling Safe Operations Guidelines," Dallas, TX, 1995.

Gas Research Institute, "Final Report — Guideline for the Application of Guided Horizontal Drilling to Install Gas Distribution Piping," GRI-96-0368, September 1996.

National Transportation Safety Board, "Safety Study: Protecting Public Safety Through Excavation Damage Prevention," Washington, DC, December 1999.

National Utility Contractors Association (NUCA), "Trenchless Construction Methods and Soil Compatibility Manual," 3rd Edition, Washington, DC.

National Utility Locating Contractors Association (NULCA), "Excavation Practices & Procedures for Damage Prevention," Spooner, WI, 1996.

Endnotes

When endnotes begin with a date, this is the date that the amendment or addition was approved by CGA's Board of Directors.

1. National Transportation Safety Board, 1995. Proceedings of the Excavation Damage Prevention Workshop; 1994 September 8-9; Washington, DC, Report of Proceedings NTSB/RP-95/01 (pp.177-178), Washington, DC.
2. National Utility Locating Contractors Association, 2002. Locator Training Standards and Practices, Spooner, WI
3. 11/30/2001 Amendment approved by the CGA Board via TR-2001-02A
4. 09/27/2002 Amendment approved by the CGA Board via TR-2001-02B
5. 04/08/2003 Addition approved by the Best Practices Committee
6. 09/25/2003 Amendment approved by the CGA Board via TR-2001-04
7. 03/26/2004 Amendment approved by the CGA Board via TR-2003-02
8. 09/24/2004 Information contained in this appendix approved by the CGA Board

9. 09/24/2004 Amendment approved by the CGA Board via TR-2001-05
10. 03/04/2005 Amendment approved by the CGA Board via TR-2004-02
11. 03/04/2005 Amendment approved by the CGA Board via TR-2004-03
12. 04/15/2005 Amendment approved by the CGA Board via TR-2004-04A
13. 09/16/2005 Amendment approved by the CGA Board via TR-2002-03
14. 09/16/2005 Amendment approved by the CGA Board via TR-2004-04B
15. 09/08/2006 Amendment approved by CGA Board via TR-2002-04
16. 09/08/2006 Amendment approved by the CGA Board via TR-2005-02
17. 11/16/2006 Amendment approved by CGA Board via TR-2006-02
18. 08/24/2007 Modification to statement approved by the CGA Board via TR2007-01
19. 08/24/2007 Modification to statement approved by the CGA Board via TR2007-02
20. 08/24/2007 Modification to description approved by the CGA Board via TR2007-03
21. 11/15/2007 Amendment approved by the CGA Board via TR-2007-04
22. 08/08/2008 Amendment approved by CGA Board via TR-2007-05
23. 08/08/2008 Amendment approved by the CGA Board via TR-2007-06
24. 11/14/2008 Amendment approved by the CGA Board via TR-2005-05
25. 12/12/2008 Amendment approved by the CGA Board via TR-2006-03
26. 05/15/2009 Amendment approved by the CGA Board via TR-2008-01
27. 10/16/2009 Addition approved by the CGA Board via TR-2009-01
28. 10/16/2009 Addition approved by the CGA Board via TR-2009-04
29. 10/16/2009 Addition approved by the CGA Board via TR-2009-05
30. 10/16/2009 Addition approved by the CGA Board via TR-2009-07
31. 10/16/2009 Amendment approved by the CGA Board via TR-2009-08
32. 12/04/2009 Addition approved by the CGA Board via TR-2009-17
33. 12/04/2009 Amendment approved by the CGA Board via TR-2009-20
34. 03/03/2010 Amendment approved by the CGA Board via TR-2008-02
35. 07/16/2010 Amendment approved by the CGA Board via TR-2008-03
36. 07/16/2010 Amendment approved by the CGA Board via TR-2009-16
37. 07/16/2010 Final wording approved by the CGA Board via TR-2009-16
38. 09/10/2010 Addition approved by the CGA Board via TR-2009-09
39. 09/10/2010 Amendment approved by the CGA Board via TR-2009-09
40. 09/10/2010 Amendment approved by the CGA Board via TR-2010-01A
41. 09/10/2010 Amendment approved by the CGA Board via TR-2010-01B
42. 06/17/2011 Addition approved by the CGA Board via TR-2009-12
43. 08/26/2011 Addition approved by the CGA Board via TR-2010-05
44. 12/01/2011 Amendment approved by the CGA Board via TR-2010-04
45. 08/10/2012 Amendment approved by CGA Board via TR-2010-02
46. 08/10/2012 Addition approved by CGA Board via TR-2011-02
47. 08/10/2012 Addition approved by the CGA Board via TR-2011-06
48. 08/10/2012 Addition approved by the CGA Board via TR-2011-07
49. 08/10/2012 Addition approved by the CGA Board via TR-2011-08
50. 08/10/2012 Amendment approved by the CGA Board via TR-2011-09
51. 12/13/2012 Addition approved by the CGA Board via TR-2011-03
52. 12/13/2012 Addition approved by the CGA Board via TR-2011-05

53. 12/13/2012 Addition approved by CGA Board via TR-2012-05
54. 10/24/2013 Addition approved by CGA Board via TR-2011-01
55. 12/05/2013 Amendment approved by the CGA Board via TR-2009-14
56. 12/05/2013 Amendment approved by the CGA Board via TR-2013-02
57. 06/19/2014 Practice removal approved by the CGA Board via TR-2010-02
58. 06/19/2014 Wording approved by CGA Board via TR-2010-02
59. 06/19/2014 Wording approved by CGA Board via TR-2011-11
60. 12/11/2014 Wording approved by CGA Board via TR-2012-01
61. 11/04/2015 Amendment approved by Best Practices Committee via TR-2013-03
62. 11/04/2015 Approved by Best Practices Committee via TR-2015-03
63. 07/22/2016 Approved by CGA Board via TR-2015-01
64. 12/13/2016 Approved by CGA Board via TR-2014-01
65. 12/13/2016 Approved by CGA Board via TR-2015-02
66. 12/13/2017 Approved by CGA Board via TR-2015-03
67. 12/13/2017 Approved by CGA Board via TR-2016-01
68. 07/27/2018 Approved by CGA Board via TR 2017-02
69. 03/26/2019 Approved by CGA Board via TR 2014-02
70. 07/24/2019 Approved by CGA Board via TR 2013-01
71. 01/16/2020 Approved by Best Practices Committee via TR-2018-01
72. 04/12/2021 Approved by CGA Board via TR 2019-02
73. 04/12/2021 Approved by CGA Board via TR 2019-02
74. 04.12.2021 Approved by CGA Board via TR 2019-02
75. 04/06/2022 Approved by CGA Board via TR 2021-02
76. 04/06/2022 Approved by CGA Board via TR 2021-02
77. 04/06/2022 Approved by CGA Board via TR 2021-02
78. 04/06/2022 Approved by CGA Board via TR 2021-02
79. 07/28/2022 Approved by CGA Board via TR 2021-01
80. 10/20/2022 Approved by CGA Board via TR 2021-01
81. 10/20/2022 Approved by CGA Board via TR 2021-02
82. 10/20/2022 Approved by CGA Board via TR 2021-02
83. 10/20/2022 Approved by CGA Board via TR 2022-04
84. 10/20/2022 Approved by CGA Board via TR 2022-05
85. 12/06/2022 Approved by CGA Board via TR 2021-02
86. 12/06/2022 Approved by CGA Board via TR 2022-01
87. 12/06/2022 Approved by CGA Board via TR 2022-01
88. 12/06/2022 Approved by CGA Board via TR 2022-01
89. 12/06/2022 Approved by CGA Board via TR 2022-01
90. 12/06/2022 Approved by CGA Board via TR 2022-01
91. 12/04/2023 Amendment approved by CGA Board via TR 2023-02
92. 12/04/2023 Amendment approved by CGA Board via TR 2022-06
93. 12/04/2023 Amendment approved by CGA Board via TR 2022-06
94. 12/04/2023 Amendment approved by CGA Board via TR 2022-06
95. 12/04/2023 Amendment approved by CGA Board via TR 2023-01
96. 12/04/2023 Amendment approved by CGA Board via TR 2023-01
97. 12/04/2023 Amendment approved by CGA Board via TR 2023-01
98. 12/04/2023 Approved by CGA Board via TR 2023-03

99. 12/04/2023 Amendment approved by CGA Board via TR 2023-05
100. 12/05/2024 Amendment approved by CGA Board via TR 2023-04
101. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
102. 12/05/2024 Addition approved by CGA Board via TR 2023-01
103. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
104. 12/05/2024 Practice removal approved by CGA Board via TR 2021-01
105. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
106. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
107. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
108. 12/05/2024 Practice removal approved by CGA Board via TR 2021-01
109. 12/05/2024 Practice removal approved by CGA Board via TR 2021-01
110. 12/05/2024 Amendment approved by CGA Board via TR 2021-01
111. 12/05/2024 Practice removal approved by CGA Board via TR 2021-01
112. 12/05/2024 Addition approved by CGA Board via TR 2023-01
113. 12/05/2025 Amendment approved by CGA Board via TR 2024-03
114. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
115. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
116. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
117. 12/05/2025 Practice removal approved by CGA Board via TR 2021-02
118. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
119. 12/05/2025 Practice removal approved by CGA Board via TR 2021-02
120. 12/05/2025 Practice removal approved by CGA Board via TR 2021-02
121. 12/05/2025 Practice removal approved by CGA Board via TR 2021-02
122. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
123. 12/05/2025 Amendment approved by CGA Board via TR 2021-02
124. 7/29/2025 Amendment approved by CGA Board via TR 2025-02
125. 12/05/2025 Amendment approved by CGA Board via TR 2023-05
126. 12/05/2025 Amendment approved by CGA Board via TR 2024-01
127. 12/05/2025 Amendment approved by CGA Board via TR 2023-05
128. 12/05/2025 Addition approved by CGA Board via TR 2024-04
136. 12/05/2025 Addition approved by CGA Board via TR 2024-01
137. 12/05/2025 Amendment approved by CGA Board via TR 2025-02
138. 12/05/2025 Addition approved by CGA Board via TR 2025-01
139. 12/05/2025 Amendment approved by CGA Board via TR 2023-05

APPENDIX E

CGA Member Organizations

List Current as of Jan. 9, 2026

1 Stop Utility & Construction Services LLC
1155 Infrastructure Solutions, LLC
1888 Industrial Services
2M General Engineering
3 Peaks Underground Construction, LLC
3D Partners LLC
3M
4 Warriors Hydro Excavation, LLC
4G Excavation LLC
4M Analytics
4th Generation Tree
5 C Holdings, Inc.
679692 BC LTD DBA On Call Service Center
811 Assist
A Plus Tree LLC
A Plus Utility Locating
A. J. Excavation, Inc.
A-1 Advantage Asphalt
AAAsphalting LLC
AAA Tree Service LLC
Aaron Enterprises, Inc.
ABC Liovin Drilling Inc
Abercrombie Pipeline Services, LLC
Able Maintenance, Inc.
ABSL Construction
ACC Construction, Inc.
Accelerated Construction & Metal, LLC
Access General Contracting, Inc.
Access Limited Construction
ACCO Engineered Systems, Inc.
Accurate Corrosion Control, Inc.
Action Asphalt Maintenance Inc.
Action Environmental
ACTS Now Inc.
ACV Environmental
Adelphia Gateway, LLC
Advance Asphalt, Inc.
Advanced Chemical Transport LLC dba ACTenviro
Advanced Hydrovac Inc
Advanced Lighting Services, Inc.
Advanced Line Systems
Advanced Spade Company
Advanced Utilities
AEGIS Insurance Service, Inc.
AES Industrial
Ahlborn Fence & Steel, Inc.
Ahtna Government Services Corporation
Aiken & Fairbanks Inc. dba Fairbanks Paving Co.
Air Products and Chemicals, Inc.
AirX Utility Surveyors, Inc
AJ Ventures, Inc.
A-Jay Excavating, Inc.
Alabama 811
ALB Inc.
Albion Environmental, Inc.
Alisto, Inc.
All American Paving
All Commercial Fence
Allegheny Contracting, LLC
Alliance Environmental Services, Inc.
Alliant Energy
Allied Corrosion Industries, Inc
Allison Sierra Inc.
Alpha Pacific Engineering & Contracting, Inc.
Alpha Power Group
Alta Archaeological Consulting LLC
ALTA Concrete, Inc.
Alta Fence Company
Alternative Structural Technologies Inc
Alvah Group, Inc.
AMAROK, LLC
Ameren Illinois
American Asphalt Repair & Resurfacing Company, Inc.
American Boring Company Inc
American Construction and Supply, Inc.
American Fuel & Petrochemical Manufacturers
American Gas Association
American Incorporated
American Integrated Services, Inc.
American Petroleum Institute
American Public Gas Association
American Public Works Association
Ample Electric, Inc.,
AMPPP Construction Inc.
AMS Construction Inc
Anderson Burton Construction
Anderson Underground
ANE Services Inc
Angkor Engineering, Inc.
Anrak Corporation
Antonio Hidalgo's Tree Service
Anvil Builders Inc.
Anvil Power
Apeiron Utility Construction
Apex Environmental & Engineering Inc.
Apex Federal Engineering Inc.
Apex Pipeline Services, Inc.
Appellation Construction Services, LLC.
Applied Construction Solutions, INC
Applied Earthworks, Inc.
APS Environmental
Aquatic Designing Inc dba North Coast Fabricators
ARB Inc.
ArborWorks, LLC
Arcadis
Arctic Arrow Power Systems Inc.
Aristeo Construction
Arizona 811
Arizona Pipeline Company
Ark Ventures
Arkansas 811
Arkansas Public Service Commission
Armour Fence
Arrow Drillers Inc DBA Arrow Construction

ASAP Paving Inc.
Asphalt Technology Inc
Asplundh Construction, LLC
Associated General Contractors of America
Associated Traffic Safety Inc.
Association of Equipment Manufacturers
Asta Construction Co., Inc.
AT&T
Atlas Foundation Co., LLC
Atlas Trenchless, LLC
Atmos Energy Corporation
Austin's Concrete & Asphalt Cutting
Avina Equipment Rental Incorporated
Avista Corporation
Avtech Construction Inc
Aztrack Construction
AzulWorks Inc
B & B Plumbing & Construction, Inc.
B & H Construction, LLC
B & M Ashman, Inc.
B&B Hughes Construction, Inc.
B&G Pipeline Company
B. Jackson Construction & Engineering Inc.
Badger Infrastructure Solutions dba Badger Daylighting Corp
Ballard Marine Construction LLC
Baltimore Gas and Electric Company
Bancroft Construction Services, LLC
Bargas Environmental Consulting, LLC
Barnard Pipeline Inc
Barr Engineering Co.
Barrow's Landscaping
Barton Malow Company
Basin Enterprises
Bass Engineering Company
Bay Area Geotechnical Group
Bay Area Hydrovac
Bay Area Paving
Bay Cities Asphalt, Inc.
BDS Enterprises LLC
Bear Electrical Solutions, LLC
Bedrock Engineering, Inc.
Bedrock LLC dba Ground Solutions
Beeghly Tree, LLC
BEI Construction, Inc
Benchmark Subsurface Utility Services
Benchmark Utility Services
Bennett Construction, Inc.
Benson & Son Electric, Inc.
Benton-Georgia, LLC
Bermex
Bess TestLab, Inc.
Beta Engineering, LLC
Beyond Underground
BH Holmes Construction Co.
BH Inc
BHE GT&S
Bill Nelson General Engineering Construction Inc.
Bill Petty's Backhoe Service, Inc.
Bjork Construction CO. INC.
BKF Engineers
Black & Veatch Corporation
Black Hills Energy
Black Widow Energy Inc
Blackburn Mfg. Co.
Blackeagle Energy Services
Blaine Tech Services, Inc.
Blair, Church & Flynn Consulting Engineers
Blake Pipeline Inc.
Blood Hound, LLC
Blue Iron Foundations and Shoring, LLC
Blue Sky Construction LLC
Blue Stakes of Utah 811
BluRoc, LLC
Boardwalk Pipelines, LP
BoltWest LLC
BOND Civil & Utility Construction, Inc.
Bonilla Equipment, Inc.
Bordges Timber Inc.
BOSS Solutions
Boundary Fence and Supply Co.
Bowman Asphalt Inc.
BP Pipelines North America
Bradley Tanks Inc.
Bradshaw Construction
Bradshaw Group, Inc.
Brand X Hydrovac Services, Inc.
Bray Construction Services
BRIXCO Construction, Inc.
Brookhart Electric, Inc.
Brotherton Pipeline, Inc.
Bruce Howard Contracting, Inc
Brucon Inc.
Brunk Excavating INC.
BT Construction, Inc.
Buchanan Contracting, Inc
Buckeye Partners, LP
Buckeye Pipeline Construction, Inc.
Bullert Industrial Electric, Inc.
Burke Moore Law Group, LLP
Burns & McDonnell Western Enterprise, Inc.
C & R Fence Contractors Inc
C&C Utility, Inc.
C&W Construction Specialties Inc.
C. Overaa & Co
C. W. Lance LLC
C.F. Archibald Paving, Inc.
C.J. Hughes Construction Company Inc.
C2R Engineering, Inc.
Cable Protect North America Inc
CAC Industries, Inc.
CACI Communications, LLC
Cal Empire Engineering, Inc.
Cal Pacific Constructors Inc
Cal Valley Construction, Inc.
California Auger Boring
California Boring, Inc
California Cut & Core, Inc.
California Locating Services, Inc
California Reforestation, Inc.
Call Before You Dig, Inc.
Callahan Paving Corp.
Cal-West Concrete Cutting, Inc.
Campos EPC, LLC
Canadian Common Ground Alliance
Cannon Construction, LLC

Cannon Constructors, LLC
 Canyon Dirt Works LLC
 Carl Bolander and Sons
 Carly Howell DBA DC Construction
 Carolina Power and Signalization, Inc.
 Carone & Company, Inc.
 Carri Construction, Inc.
 Cascade Drilling LP
 CB2 Builders, Inc.
 CBI Power
 CC Power
 Cedar Creek Corporation
 Cencal Directional Drilling, Inc.
 CENCAL Services Inc.
 Cenergy, LLC
 Centerline Energy Construction LLC
 CenterPoint Energy
 Central Coast Land Services, Inc.
 Central Michigan Contracting, Inc.
 Central Sierra Enterprise Inc.
 Central Valley Engineering & Asphalt, Inc.
 Centrica Business Solutions Services, Inc.
 CGS Energy
 CH2M HILL Engineers, Inc., a wholly owned subsidiary of Jacobs Engineering Group Inc.
 Chain Link Fence and Supply, Inc.
 Champion Cleaning Specialists, Inc.
 Charps LLC
 Cheniere Pipeline
 Chesapeake Utilities Corporation
 Chet Morrison Contractors, LLC
 Chiapperino & Sons Inc dba All County Asphalt Maintenance
 Chinchon Electric
 CHS Inc.
 Chucks Septic Tank dba CST Utilities
 Circle M Construction Co Inc
 Citizens Energy Group
 City of Arvada
 City of Chicago - 811 Chicago
 City of Corpus Christi Gas Department
 City of Ellensburg Gas Division
 City of Fountain
 City of Kings Mountain
 City of Las Cruces
 City of Lexington
 City of Long Beach - Long Beach Utilities
 City of Mesa
 City of Ocala Water Resources
 City of Shelby
 City of Tallahassee, Electric and Gas Utility
 Civil Substations Inc.
 Civtel, Inc.
 CJ Drilling, Inc.
 CJ Torres Construction Inc. DBA Breakthrough Ground-works
 Claims Management Resources
 Clarke-Mobile Counties Gas District
 Clarksville Gas & Water Department
 Clean Harbors Environmental Services
 ClearPath Utility Solutions, LLC
 Clearwater Landscape Services, Inc
 Clell Construction, LLC
 CMV Landscape & Equipment Co.
 Coastal Fiber, LLC
 Coastal Paving & Excavating Inc.
 Cogstone Resource Management
 Cole Contracting Inc.
 Colibri Ecological Consulting, LLC
 Colonial Pipeline
 Colonnelli Brothers, Inc.
 Colorado 811
 Colorado Springs Utilities
 Columbia Electric, Inc.
 Comcast
 Commercial Contracting Corporation
 Communication Construction & Engineering, Inc.
 Community Tree Service, LLC
 Compass Energy Services, LLC
 Complete Mechanical Services, LLC.
 Complete Underground LLC
 Conaway Geomatics
 Condon-Johnson & Associates, Inc.
 ConeTec Investigations Ltd
 Confluence Technical Services, Inc.
 Connor Concrete Cutting and Coring
 Consolidated Edison of New York
 Constru One Inc
 Construction Testing Services
 Consumers Energy
 Contra Costa Water District
 Cooper Energy Services Inc
 Copperhead Industries
 Cordoba Corporation
 Core & Main
 Core Construction Builders and Associates, Inc
 Core States Construction Services
 Corner Bit Excavation
 Cornerstone Environmental Contractors, Inc.
 Cornforth Consultants, Inc.
 Corrosion Service Company Limited
 Corpro
 CoServ
 Cotton, Shires and Associates, Inc.
 Countrymark Refining & Logistics, LLC
 Cox & Cox Construction Inc.
 CPN Pipeline Company
 Crimson Pipeline, L.P.
 Crown Castle
 Crusader Fence Company LLC
 Crux Diving Inc
 Crux Subsurface, Inc.
 Cuevas Fencing Co
 Culver Company
 Cupertino Electric Inc.
 Cut 'N Core, Inc
 CW Wright Construction LLC
 Cyclone Services LLC
 D&M Utility Services of CA
 D&S Backhoe Service Inc
 D&S Construction Inc
 D&T Power LLC
 D.A. Lampe Construction
 D.W. Young Construction Company Inc.
 Dakota Gasification Company
 Dakota Matting & Environmental Solutions LLC

- Dale W. Carter Fencing
 Daleo Inc
 Damage Prevention Academy
 Damage Prevention Solutions, LLC
 Danville Utilities
 Daphne Utilities
 Dars Cox Construction Inc.
 Das-Co of Idaho
 Dashiell Dacon Corporation
 Dave Desatoff Backhoe Service, Inc
 Davey Resource Group, Inc.
 Davey Tree Surgery Company
 Davids Hydro Vac Inc.
 Davis H. Elliot Construction Company Inc.
 DCC Demolition Services
 DCOMM
 DDS Companies - Energy Services
 Dean Equipment, Inc
 Dee's Plumbing, Inc
 Delmarva811
 Delta Grinding Company, Inc.
 Diamond's Management Group, Inc.
 Dick Howell's Hole Drilling Service, Inc.
 Dig Alert Done Right LLC / dba Hydro Pros
 Dig Safe System, Inc
 DigContrax
 Diggers Hotline, Inc.
 Digital Control Inc
 DigMasters LLC
 DigSense
 Directional Drilling Wrkz Inc
 Directional Plus, LLC
 Directional Services LLC
 Dirt Dynasty Inc
 Discovery Hydrovac, LLC
 Distribution Contractors Association
 Ditch Witch Division
 Div. of Occupational and Professional Licenses (Idaho Dam. Prev. Board)
 Diversified Project Services International, Inc.
 Diversified UG Utilities, Inc.
 Diversified Underground Inc.
 Diversified Utility Services LLC
 Diversified Utility Services, Inc.
 Dixon Marine Services, Inc.
 DLE, LLC
 D-Line Constructors, Inc.
 Dominion Energy - Electric
 Dominion Energy - Gas
 Don Pridmore & Son Construction, Inc.
 Don Wartko Construction, Inc.
 Donahoo Inc.
 D'Onofrio General Contractors
 Doty Bros Equipment Co.
 Double C of the Piedmont Inc
 Doug Veerkamp General Engineering Inc
 Drake HDD LLC
 Drill Tech Drilling & Shoring, Inc.
 Drilltech
 DSM Concrete, Inc.
 DTE Energy - Gas
 Dudek
 Duke Energy - Customer Delivery
 Duke Energy/Piedmont Natural Gas
 Dukes Root Control Inc
 Duran & Venables, Inc
 Durham Construction Company, Inc.
 d'Vinci Interactive
 DW Plumbing, Inc
 E. Stanek Electric
 E.C.I. Building Corp.
 E.E. Gilbert Construction Inc
 Eagle Excavation, Inc.
 Eagle River Utility Solutions LLC
 Earthcom Inc.
 Earthworm Drilling
 Eastern Municipal Water District
 EBC Enterprises, Inc
 EBE Electric, LLC
 Eberhart Construction Company Inc.
 EC Source Services
 Edison Power Constructors, Inc.
 Eel Drilling LLC
 EGW Utility Solutions
 E-J Electric T&D LLC
 E-J Energy, LLC.
 El Capitan Environmental Services
 Elecnor Belco Electric, Inc.
 ElectricCom
 Eleven Engineering, Inc.
 Elenco
 Elite Constructors, Inc.
 Elite Landscape Construction, Inc.
 Elite Underground, Inc.
 Ellingson Companies
 Ellis Fence Co., Inc.
 ELM Companies
 ELQ Industries, Inc.
 Elsinore Valley Municipal Water District
 Empire Earthworks LLC
 EN Engineering, LLC
 Enbridge Energy Company, Inc.
 EnCompass Pipeline LLC
 Energy Delivery Partners, Inc.
 Energy Transfer
 Enertech
 ENGEO Incorporated
 Engineered Tower Solutions
 Engineering & Construction Innovations
 Engineering/Remediation Resources Group, Inc.
 English Directional Drilling, LLC.
 EnLink Midstream
 Ensign United States Drilling (California) Inc.
 Entact, LLC
 Entergy
 Enterprise Products
 Environmental Construction, Inc.
 Environmental Waste Minimization, Inc.
 Envision Fiber, LLC
 Eocene Environmental Group
 EPIC Insurance Brokers & Consultants
 Eppler
 Equix, Inc.
 ER Utility Construction LLC
 ERM
 Esquivel Grading & Paving, Inc.

CGA Member Organizations

Essential Utilities, Inc.
ETIC
Evans & De Shazo, Inc
Evans Construction
Evcharge4u INC
Evers and Sons Inc.
EX EL Pipeline Services LLC
Exaro Technologies Corporation
Excel Underground, LLC
Expand Energy
Expanse Electrical Company
Explorer Pipeline Company
Express Sewer & Drain, Inc
ExxonMobil Pipeline Company
Faith Electric, LLC
Family Tree Service, Inc
Far Western Anthropological
Farwest Corrosion Control Company
Ferreira Construction Co., Inc.
Ferreira Power West LLC
Fiber Conduit Solutions
Fiber Tech Underground LLC
FiberLight
FiberSense
FiberTel, LLC
Fidelis Green, Inc.
Fine Line Sawing & Drilling, Inc
Fire and Flood Emergency Services USA, Inc.
Flagshooter Inc
Flare Construction LLC
Flash Burn Enterprises Inc
Fletcher's Plumbing and Contracting, Inc.
Flint Hills Resources
Flory Line Construction LLC
Flyscan Systems
Foco Inc. dba Dependable Sewer Services
Foothill Electric Inc.
Foremost Pipeline Construction Co.
FortisBC Energy Inc.
Foundation Constructors, Inc.
Foundation Energy Services LLC
Foundation Power, Inc.
Foundation Soil Stabilization, Inc.
Fowlkes Pipeline Inc.
Franchelli Enterprise Inc.
Franklin Construction
Freschi Construction, Inc.
G&R Excavating co dba Whitt's Welding and Pipeline
GAC Enterprises
Gallup Pipeline and Compliance Services, LLC.
Ganim Company
Gary Bass Construction, Inc (GBCI)
Gas Field Specialists, Inc.
Gas Transmission Systems, Inc.
Gateway Fiber
GCJ Inc.
GE Vernova
GECMS, Inc dba Giron Construction, Inc.
GEI Consultants, Inc.
General Construction
Genesis Energy, L.P.
Geocentric Drilling Inc
GeoPoint, Inc.

Georgia 811
GeoServ, Inc.
Geo-Solutions, Inc.
Geosyntec Consultants, Inc.
GFL Environmental Services USA, Inc
GFT Infrastructure, Inc.
Ghilotti Bros., Inc.
Ghita Underground Engineering Inc.
Gianfia Corp.
GL Richter, Inc.
Global Energy Partners, LLC
Global Mountain Solutions USA, LLC
Global Tower Service, Inc
Global Underground Corp.
Goebel Construction Inc
Golden Bay Fence plus Iron Works, Inc.
Golden State Municipal Construction, LLC.
Goodfellow Bros CA LLC
Google Fiber
Gopher State One Call
GPRS
GR Sundberg, Inc.
Grady Crawford Construction Co., Inc of Baton Rouge
Granite Construction Company
Granite Northwest Grading and Paving, Inc
Gravity Oilfield Services, LLC
Gray AES
Graycor Industrial Constructors Inc.
Great Southwestern Construction, Inc.
Green Options Electric
Green Water and Power LLC
Greenville Utilities Commission
Greer Commission of Public Works
Greg Shandel Construction Inc.
Gregg Drilling, LLC
Gregory Drilling Inc.
GRID Alternatives
Grid Power LLC
GridHawk LLC
Ground Level Construction, Inc.
GSW Construction Inc.
Guardian Plumbing & Heating, Inc.
Gulf Shore Construction Services, Inc. dba GS Exploration
H&B Drilling and Sons
H.I.S. Pipeline, LLC
H.M. Miller Construction
H2 Enterprises
Habitat Construction LLC
Hal Hays Construction Inc.
Haley & Aldrich, Inc.
Hampton Tedder Electric Co.
Hanging H Companies LLC
Hangtown Electric, Inc.
Hansen Brothers Enterprises
Hardcore Construction Inc.
Heavy Load Construction
Heavy Road & Rail, Inc.
Helios Rising, Inc.
Henderson Municipal Gas
Henkels & McCoy - East Region
Henkels & McCoy West LLC
HHS Construction LLC

Hi Range Electric
 Hickman Utility, Inc.
 High Performance Pipelines Hydrovac Excavation Inc
 High Voltage Energy Inc.
 Hillhouse Construction Company
 Hitachi Energy USA Inc.
 Hiwasse Plumbing & Excavation LLC
 Holloman Corporation
 Holly Energy Partners (dba, HF Sinclair Midstream)
 Honeywell
 Hooper Corporation
 Hoosier Vac LLC
 Hooven & Co., Inc.
 Hot Line Construction
 HPS Mechanical, Inc.
 Humes Utilities Underground, Inc.
 Hutchins Inc.
 Hydro Excavators
 Hydrodig Canada Inc.
 Hydrodig Denver LLC
 Hydroexcavators LLC
 HydroMAX LLC
 Hydrovac Excavating Inc
 Iba Drilling Company Inc
 ICF Jones & Stokes, Inc.
 ICON Environmental Services, Inc.
 Idaho Public Utilities Commission
 Impulse Radar
 Indiana 811
 Industrial Constructors Managers Inc.
 Industrial Field Services, Inc.
 Info-Excavation
 Infrasource
 InfraSource Services LLC
 Infratech Corporation
 InfraTerra, Inc
 Innerline Engineering Inc.
 Innovative Environmental Technologies, Inc.
 INSERV, Inc.
 Integrity General Engineering Contractors, Inc.
 Integrity Solutions Field Services
 Intermountain Electric, Inc.
 International Line Builders, Inc.
 Intren West
 Inyon Corrosion Services, LLC
 Iowa One Call
 Irby Construction
 Irish Electric Corp
 Iron Horse Energy Services, Inc.
 Irth Solutions
 ITG Communications
 J & E Backhoe Service Inc
 J K S Construction Backhoe Service
 J&D Excavation, Inc.
 J&H UTILITIES LLC
 J. & H. Drilling Co., Inc. dba M R Drilling
 J. F. Kiely Construction Co. of PA
 J. Ranck Electric
 J.J. Barney Construction, Inc.
 J.P. Backhoe Services Inc
 Jackson Demolition Service, Inc
 Jaeger Vacuum Excavation LLC
 JAW Inc.
 JB Bostick Company
 JBR Pipeline LLC
 JB's High Voltage, Inc
 J-C General Engineering, Inc.
 JC Palomar Construction, Inc.
 JC Roman Construction
 Jeneric Enterprises, Inc. dba Strole's Tri-Service
 Jeremy Desatoff Backhoe Service
 Jerry's Trenching Service
 JH Kelly, LLC
 JHA Remediation LLC
 J-Ken Pipe & Steel, LLC
 JMF Underground Inc
 Job Site Services, Inc.
 Johns Group LLC
 Joseph Construction and Consulting Inc dba Joseph Engineering
 Joseph J. Albanese, Inc.
 JR Nation Electric Inc.
 JRGO dba Integrity Assessment Group
 JSI
 JT2 Engineering and Construction
 JTK Rental & Construction LLC
 JULIE, Inc.
 JW Restoration Concepts, Inc
 K & W Underground
 K&K Inc.
 K.W. Emerson, Inc.
 K2 Industrial Services Inc.
 Kaltz Excavating Co., Inc.
 Kansas 811
 Kantex Industries
 Katch Environmental Inc
 Kent Power
 Kentucky 811
 Kentucky Public Service Commission
 Kerex Engineering Inc.
 Kern Precision Excavation
 Kern River Gas Transmission
 Kemen Construction
 Kinder Morgan
 Kindness General Contractors, Inc.
 Kinetic Industry
 Kinsley Construction
 KLE, Inc
 Kleinfelder
 Klines Plumbing
 KMI Road Maintenance LLC
 Knoxville Utilities Board
 Koch & Koch, Inc.
 Kodiak Services Ltd
 Kokosing Inc.
 KorTerra, Inc.
 Krazan & Associates Inc.
 Kroeker, Inc.
 Krylon Products Group
 KV Structures, Inc.
 KVP Energy Services
 Lake Apopka Natural Gas District
 Lake Superior Consulting
 Langan Engineering and Environmental Services, Inc.
 LaunchPoint Software Systems, Inc.
 LeapFrog Plumbing & Home Improvement

CGA Member Organizations

LeCom LLC
Lee Electrical Construction
Lee Wilson Electric Company, Inc.
Legacy Hydrovac
Legacy Remediation, Inc.
Legends Hydrovac
Legion LLC
Lehigh County Authority
Leica Geosystem
Lentz Construction General Engineering Contractor Inc
Leo Construction Company
Lettis Consultants International, Inc.
Lewis and Tibbitts, Inc.
LG&E Energy
Liberty Utilities
Lindco Inc.
Linde Corporation
Line Mule Engineering
LineQuest, LLC
Line-Scape
Liquid Energy Pipeline Association
LITE ON THE LAND, INC
Live Oak Power LLC
Live Oak Utility Infrastructure, LLC
LiveEO GmbH
LJ Inc
LJA Engineering, Inc.
LJA Surveying, Inc.
LOC International LLC
Locating Dynamics
Lohman Helicopter, LLC
LoJac, LLC
Lombardo Diamond Core Drilling Co., Inc.
Longitude 123, Inc.
Los Tres Topos LLC (dba Blue Foxx Pipeline)
Louisiana 811
LT Directional Boring
Lund Construction Company
LyondellBasell
M & K Jetting & Televising
M & L Construction
M Sawcutting, Inc dba Accurate Sawcutting
M&T Enterprises
M. M. Miller Brothers Excavating, INC.
M.A. McClish Excavating, Inc.
M.J. Electric
M.L. Chartier Excavating Inc
M.U.E. Inc
M/C Power, Inc. dba WoodWalkers Electrical Contracting, Inc.
Machado & Sons Construction Inc.
MAG Landscaping Inc (aka Miguel A Garcia Landscaping)
Mainline Underground Inc.
Major Construction Group Inc.
Malcolm Drilling
Malley Well Drilling Inc.
Mana EC
Maples Plumbing and Heating Inc
Marathon Pipe Line LLC
Maricopa County Department of Transportation
MARK Construction Inc
Mark Thomas & Company, Inc.
Maryland Underground Facilities Damage Prevention Authority
Mashburn Transportation Services
Massive Services LLC
MasTec Utility Service
Master Electric Inc.
Materials Testing Inc. dba KC Engineering Company
MBS Engineering, Inc
MC Cable Connections INC
McCormick Biological Inc.
MCE Corporation
McGuire and Hester
McKim & Creed, Inc.
McVac Environmental Services, Inc.
MDU Resources
Meade
Mears Broadband
Mears Group Inc. - Mears Pipeline Integrity
Mears Group Inc.- Central
Mears Group, Inc- Mears Pipeline
Mears Group, Inc.
MEC Construction, LLC
Meche Construction
Merced Fence Co.
Merganser Inc.
MESA Products, Inc dba MESA Services
Metro Pavers Inc.
Metro Water Recovery
Metronet
Metropolitan Electrical Construction, Inc.
Metropolitan Utilities District
Meyer Contracting Inc.
MFM Contracting Corp.
MGE Underground, Inc
MHK Construction Inc.
Michael LaFave Construction
Michels Corporation
Michels Pacific Energy, Inc.
Michels Pipeline Inc.
Michels Power Inc.
Michels Underground Cable, Inc.
Michels Utility Services, Inc.
Mid-American Group
Middle Tennessee Natural Gas Utility District
Middleton Mechanical LLC
Midland Demolition
Mid-Ohio Pipeline Company, Inc.
Midstate Communication Contractors Inc.
Midwest Contractors and Consultants Inc
Midwest Easement Services, LLC; dba Midwest Services Group, LLC
Midwest Electrical Construction LLC
Midwest Trenchless Services, LLC
Mike's Landscaping
Milbar Hydro-Test, Inc
Milenium Inc
Miller Equipment Company, Inc.
Miller Pipeline, LLC
Millstone Weber
Miranda's Landscape
MISS DIG System, Inc
Mission Constructors
Mississippi 811, Inc.

- Missouri 811
- MK Hydrovac Inc. dba Blac-Frac Tanks
- MMR Constructors, Inc.
- MOC, Inc.
- Moe's Plumbing
- Monarch Pipeline & Hydrovac, Inc.
- Montana Construction, Inc.
- Monterey Mechanical Company
- Monument Construction Inc. DBA Techcon
- Moran Environmental Recovery
- Mora's Equipment & Construction
- Motiva Enterprises
- Motor City Electric Utilities
- Mountain Engineering
- Mountain F. Enterprises, Inc.
- MP Environmental Services, Inc
- MP Technologies - North
- Mulholland Energy Services LLC
- Munsch Excavation Inc.
- Mushrush Utility Contracting, Inc.
- N&S Construction, Inc. dba S&N Communications, Inc.
- NACC Construction, LLC
- National Fuel Gas
- National Grid
- National Waste Management Companies
- Ncal Builders Incorporation
- Nebraska 811
- Neil's Controlled Blasting, LP
- Nevada County Fence, Inc
- Nevada Regional Common Ground Alliance
- New Jersey Natural Gas
- New Mexico Gas Company
- New Mexico One Call
- New River Electric Corp
- New Tech Construction Inc.
- New York 811, Inc.
- New York Paving Inc
- Newcomb Tree Experts Inc
- Newkirk Electric
- Next Generation Construction & Environmental, LLC
- Next Level Excavating LLC
- Nick Champi Enterprises, Inc.
- Niels Fugal Sons Company
- Nish-Ko, Inc.
- NiSource
- Njirich & Sons, Inc
- NMR Pipeline LLC
- Nold's Equipment Inc
- Nomad Ecology LLC
- Nor Cal Pipeline Services
- Norfield Development Partners
- North America Telecommunications Damage Prevention Council
- North Cal Paving
- North Carolina 811, Inc.
- North Woods Excavating, Inc.
- Northern Clearing Inc.
- Northern Industrial Construction Inc.
- Northern Lights Locating
- Northern Natural Gas
- Northline Utilities LLC
- Northstar Energy Services, Inc.
- Northwest Gas
- Northwestern Ohio Pipeline Const. Inc.
- NPL East LLC
- NPL Great Lakes LLC
- NPL Mid-America LLC
- NPL West LLC
- NRC Environmental Services Inc
- NUCA
- NULCA
- NuLine Utility Services, LLC
- NW Natural
- O.C. Jones & Sons, Inc.
- Oak Pine Construction LLC
- OCS Industries, Inc.
- OCS of Virginia Inc.
- Odin Environmental Solutions LLC
- OEC
- Ohio Utilities Protection Service dba OHIO811
- Okaloosa Gas District
- Oklahoma One-Call System, Inc.
- Olameter Corp
- Old West Energy Services Inc, (DBA Petro-Pier)
- Olsen Excavation & Grading
- OMS Consulting Services
- On The Spot Utility Resources, LLC
- One Call Concepts, Inc.
- ONE Gas Inc.
- One-Call of Wyoming, Inc.
- ONEOK
- Opp Construction
- Orange & Rockland Utilities Inc
- Orange Corrosion Services Inc DBA OC&C Construction
- Oregon Utility Notification Center
- Osmose Utilities Services, Inc.
- Otis Minnesota Services
- Outback Contractors Inc.
- Outsource Utility Contractor Corp.
- Owens Maurer Construction Inc
- Owl Creek Energy Services Inc.
- Owsley Electric Inc
- P&G Power Corp
- P. Pohorence & Son Landscaping, Inc.
- PAB Contracting Corp
- Pacific Boring, Inc.
- Pacific Coast General Engineering, Inc.
- Pacific Gas and Electric Company
- Pacific Legacy, Inc.
- Pacific Petroleum California Inc
- Pacific Plumbing & Sewer Services, Inc.
- Papich Construction Co, Inc.
- Par Pacific Holdings, Inc.
- PAR Western Line Contractors, LLC
- Paradigm
- Paramount Construction & Masonry, Inc.
- Paramount Underground LLC
- PARC Environmental
- Parker-Stockstill Construction Inc
- Parmeter General Engineers & Services, Inc.
- Parsons Environment and Infrastructure Group
- Patriot General Engineering, Inc.
- Patriot Industries, LLC
- Paulson Excavating Inc
- Pavement Recycling Systems Inc.
- Paynes Enterprise, Inc.

CGA Member Organizations

PB Electric Inc.
PCL Industrial Services, Inc.
PDB Grid Works, Inc.
Peak Utility Infrastructure
PECO Energy Company
PelicanCorp OneCall, Inc.
Pembina Pipeline Corporation
Penhall Company
Pennsylvania 811
Peoples Gas
Perera Construction & Design, Inc.
Performance Mechanical, Inc.
Perreca Electric Company Inc.
Perrin Construction, Inc
Persson Inc dba California Paving Company
Petrillo Contracting Inc
Petrus Backhoe Service Inc
Phase 3 Communications, Inc.
Phillips & Jordan Inc.
Phillips 66 Pipeline LLC
Phillips Infrastructure Holdings
Pickens Underground Utilities Service, Inc
Piedmont Western Utility Services, Inc.
Pike - Dominion VA, NC and SC Work Groups
Pike Gas- Dominion Carolinas Work Group
Pike Gas- Peoples Gas Florida Work Group
Pinnacle Construction & Directional Boring, Inc
Pinnacle Pipeline Inspection Inc
Pinnacle Power Services Inc.
Pipe Strong LLC
Pipe View America
Pipehorn Locating Technology
Pipeline Video Inspection, LLC dba AIMS Companies
Pitcher Services LLC
Pix4D
PJ Steel Supply, Inc.
Plains All American Pipeline, L.P.
Plant Construction Company, L.P.
Platinum Contracting Services
PL-Enerserv, LLC
PLP
Point One Navigation, Inc
PointMan by Prostar
Pond & Company, Inc.
Ponder Environmental Services Inc
Portland General Electric
Posillico Civil Inc.
Posillico Environmental, Inc.
Positive Energy LLC
Potelco, Inc.
Powell Clinch Utility District
Power and Communication Contractors Association
Power Engineering Construction Company
Power Grade, Inc.
Power One, LLC.
Power Vac of Michigan
Power X Inc.
PowerGrid Distribution Services, LLC
PowerSecure Inc.
Praxis Land Surveying, Inc.
Precise Concrete Sawing Inc.
Precision Directional Boring, Inc.
Precision Directional Drilling
Precision Excavating and Drilling Inc
Precision Meter Repair, INC
Precision Pipeline Solutions, LLC (NY)
Precision Pipeline, LLC (WI)
Preiss Companies
Premier Engineering & Construction
Premium Utility Contractor Inc.
Preston Pipelines Infrastructure
Price Gregory International
Prime Electric
Prime Petro Services
Prime Resource Services
Prime Utility Services
Primoris Distribution Services (PDS)
Primoris Pipeline Inc
Pro Energy Services Group, LLC
Pro Pipeline
Production Engineering and Construction
Professional Electrical Construction Services
Profile Drilling & Consulting
Progressive Excavating & Grading, Inc
ProGro Environmental, LLC
Project Resources Group
Proline Underground Services
Promark-Telecon Inc.
Prunuske Chatham Inc.
Prusa Construction, LLC
Psomas
Public Service Electric & Gas Company
Puget Sound Energy
PUSH Incorporated
Q & D Construction
Q3 Contracting
QTS Group LLC
Quade, Inc.
Quality Ag, Inc.
Quam Construction Co., Inc.
R and R Pipeline Construction & Repair
R&R Pipeline Inc
R&S Erection of Monterey Bay, Inc.
R&S Erection of Richmond, Inc.
R&S Erection of San Mateo
R&S Erection Of Santa Clara County Inc.
R&S Erection of Southern Alameda County Inc.
R&S Erection, Inc Centralized Accounts
R&S Overhead Garage Door, Inc
R. Roese Contracting Co., Inc.
R.B. Satkowiak's City Sewer Cleaners Inc.
R.L. Coolsaet
R-2 Contractors, Inc
Rader Excavating Inc
Radiodetection
Ram-Con Corp.
Ranch Fence Inc
Rauhorn Electric, Inc.
Ravan Inc. dba Tru-Tek Drilling
Raymond Excavating Company
RC Electric Inc.
RCD Concrete Inc.
RCI General Engineering
Red Hawk Services Inc.
Redding Tree Growers Corporation
Redeker Excavating, LLC


- Redline Underground LLC
- Reduct
- REM Directional, Inc.
- Remarkable Constructions LLC
- Remedial Transportation Services
- Renteria Backhoe Service LLC
- Reycon Construction Solutions LP
- Reyff Electric Inc.
- Riddell General Contracting Inc.
- Riggs Distler Co.
- Ring Power Equipment
- Ring-O-Matic
- Rising Edge Technologies (California), LLC
- River City Construction, Inc.
- River City Excavation, Inc.
- Riviera Utilities
- RL Morris And Sons Construction
- RLA Utilities
- Roadway Construction Inc
- Roanoke Gas Company
- Robert Colburn Electric, Inc.
- Roberts Mechanical & Electrical, Inc. dba Roberts Service and Construction
- Robey Utility Services
- Rock Creek Construction, Inc.
- Rockpoint Gas Storage Canada, Ltd.
- Rocky Canyon Utility & Construction, Inc.
- Rodriguez Construction, LLC
- Roebbelen Contracting, Inc
- Roemer Utility Services, LLC
- Roose Pipeline Company
- Rosendin Electric, Inc.
- RSEI (Rodriguez SWPPP & Environmental Inspections)
- Ruiz Directional Drilling
- Ruiz Underground Electric
- RusCo LLC
- Rust-Oleum Corporation
- RX Lodge, Inc.
- S E Pipe Line Construction Co.
- S&S Directional Boring, Ltd
- S&S Energy Services LLC
- S/L Services, Inc.
- S2SERM, LLC
- SabCon Underground, LLC
- Safe2core, Inc.
- Safe-Ex
- SafeLine Private Locating
- Salyer Plumbing Inc
- SAM Surveying and Mapping LLC
- SAMCO
- San Diego Gas & Electric
- Sander Resources
- Sanitary Construction Company
- Santamaria Concrete Inc.
- Saorsa Construction Ohio, Inc.
- Saylers Creek Construction LLC
- Scenic Landscape Services
- Schetter Electric LLC
- Schmid Pipeline Construction, Inc.
- Screening Eagle Technologies
- SDI Services
- Seegert Construction
- SeeScan, Inc.
- Sellenriek Construction
- Sellenriek Energy, LLC.
- SEMCO Energy Gas Company
- Sequoia Ecological Consulting, Inc.
- Service Electric Company
- Service One, Inc
- Sevenson Environmental Services, Inc.
- Sewer Equipment
- SF&S Inc.
- Sharp's Backhoe Service, Inc.
- Shell Pipeline Company LP
- Shental/Glofiber
- Shiloh Paving & Excavating, Inc.
- Shimmick
- SHN
- Sierra Cascade Aggregate & Asphalt Products Inc.
- Sierra Integrated Services Inc.
- Sierra Mountain Construction, Inc.
- Sierra National Construction, Inc.
- Siller Construction Co.
- Silverado Contractors
- Silverline Pacific
- Sinclair General Engineering Construction, Inc.
- SiteWise, LLC
- SJL Construction, Inc
- SJS & SONS LLC
- Skapa Tech
- Skoda Contracting
- Slate Geotechnical Consultants, Inc.
- Sloan Security Group llc
- Smart Infrastructure Solutions, LLC
- SmartAuger, Inc.
- SmartTIX
- Smith Excavating, LLC
- Snelson Companies, Inc
- Snow Canyon Construction Services LLC
- SOCOM Underground
- Sodexo at San Ramon Valley Conference Center
- Sogelink Group
- Solinas Technologies Inc.
- South Bow Infra Holdings LTD.
- South Carolina 811
- South Dakota 811
- South Jersey Gas Company
- Southeast Connections, LLC
- Southeast Gas
- Southeastern Archaeological Research, LLC
- Southeastern Pipeline & Environmental Services LLC
- Southern California Edison
- Southern California Gas Company
- Southern Company
- Southern Contracting Company
- Southern Cross, LLC
- Southern Pipeline Construction Co., Inc.
- Southern Star Central Gas Pipeline, Inc
- Southwest Distributors LLC
- Southwest Gas Corporation
- Spade Integrity
- Sparkfund
- SPE Group
- SPEC Services, Inc.
- Spire
- Spriggs Excavation, Inc.

CGA Member Organizations

Sprouse Communications Inc
SSEC Inc.
Stack Bros. Mechanical Contractors, Inc.
Stake Center Locating
Staking University
Stanley Pipeline Inc
Stantec Consulting Services Inc
State of California, Office of Energy Infrastructure Safety
Static Line, LLC
Stealth Construction
Stealth Services Inc
Steel-Crete
Step-Mar Contracting Corp.
Stevens Excavating
Stewart & Tate, Inc.
Stockton Fence & Material Co., Inc.
Storm Fall Tree LLC
Stqó:ya Construction
Studebaker Electric Inc.
Sturgeon Electric California, LLC
Sturgeon Electric Company
Submar, LLC
Summit Line Construction
Summit Plumbing and Mechanical, Inc.
Summit Utilities
Summit Utility Services LLC
Sun Electric, Inc.
Sunbelt Rentals
Sunflare Home Services
Sunrise Bobcat & Hauling Service, Inc.
Sunshine 811
Superior Hydrovac
Superior Pipeline Services
Superior Traffic and Restoration Services LLC
Superior Underground LLC
Support Operations Services
Surface Solutions, LLC
Swaim Biological, Inc
Swan Companies, Inc.
Swanson Drilling LLC
SWCA Environmental Consultants
Syblon Reid General Engineering Contractors
T&D Services, Inc.
Taber Drilling
Taber LLC
Tait Environmental Service, Inc
Tallgrass Energy
Tamerrel Excavation, Inc.
Taplin Group
Targa Resources, Inc.
Tashjian Towers Corporation
TC Energy
TCB Industrial Inc
Team Construction LLC
Team Elmers
Team Fishel
Technology, Engineering & Construction Inc., dba Accutite
TECO Peoples Gas
Teichert Line Services
Teichert Pipelines, Inc
Teichert Waterwork Services
Telstar Instruments
Tempest Enterprises, Inc.
Tempo Communications
Tennessee 811
Terra Contracting
Terra Pacific Group, Inc.
Terra West Construction
Terracare Associates, LLC
Terracon Consultants, Inc.
Terraphase Engineering
Terry Construction Inc
Tetra Tech, Inc.
Texas 811
Texas ReExcavation DBA T-Rex Services
Thayer Power and Communication Line Construction Co., LLC
The City of Colorado Springs
The Dutra Group
The Hallen Construction Co., Inc.
The HDD Company, Inc.
The Hydaker-Wheatlake Company
The Vallejo Company
ThreeSixtySolutions
Tierra Contracting
Titanic Underground Contractors Corp.
Tjader and Highstrom Utility Services, LLC
T-Mobile
TMR Underground Inc
TNT Industrial Contractors Inc
Tony's Landscaping and Maintenance
TransMontaigne Operating Company L.P.
Transwest
Traylor Bros., Inc.
TRC
TRC Construction, Inc.
TRI Industries
Trickle Creek Excavation, Inc.
Trident Environmental and Engineering Inc.
Trident Solutions
Trihydro Corporation
Trimble, Inc.
Tri-Messine Construction Co., Inc.
Trio Vision LLC
Triple B Underground Services, Inc.
Triton Construction Inc.
Triton Construction Services, Inc.
Triumph Construction
Troy Construction, LLC
Trujillos Equipment Inc.
TRUVAC
TSA Drilling, Inc. (DBA: PeneCore Drilling, Inc.)
TSU/Tree Service Unlimited Inc
Tulsa Inspection Resources, LLC
Turkey Creek HDD, Inc
Turner Construction
Turner Excavating Inc
Turn-Key Construction Services Inc.
UDig NY
UGI Utilities, Inc.
ULCS, LLC
Underground Construction Company
Underground Electric Construction Company, LLC
Underground Magnetics
Underground Pipeline Services

- Underground Service Alert - Southern California
- Underground Specialists LLC
- Unified Field Services Corporation
- Union Engineering Company, Inc
- Union Pipeline Inc.
- United Environmental Corporation
- Uniti Fiber
- Universal Site Services, Inc.
- Universal Surveying and Mapping
- Universal Underground Utility General Contracting LLC
- University of Arkansas
- Unlimited Construction 2 LLC
- UnWired, LLC
- Urata & Sons Concrete, LLC
- Urbint
- US Hydrovac Inc.
- US Trackworks, LLC
- USA Civil
- USA North 811
- USIC LLC
- USIC, LLC
- Utilify Inc
- UtiliQuest, LLC
- UtiliSource, LLC
- Utility Construction Services, Inc
- Utility Line Services, Inc
- UTTO
- V & W Drilling, Inc.
- V. Lopez Jr & Sons G.E.C.,Inc.
- VA811
- Valero Energy Corp.
- Val's Construction
- Van Thuyne-Downs Inc
- VCI Construction, LLC
- Vector Force Development, LLC
- Vector Services
- Vegetation Solutions, Inc.
- Ventura Directional Drilling, Inc
- Verde Electric Corp.
- Verita Telecommunications Corporation
- Verizon Business
- Vermeer Corporation
- Veteran Drilling
- Veteran Pipeline Construction
- Veteran Power Inc.
- Veterans Utility Services, LLC
- Video Inspection Specialists
- Viking Drillers, Inc.
- Vince Sigal Electric, Inc.
- Vindustries LLC
- Vintage Paving Company Inc.
- VIP Powerline Corp.
- Virginia State Corporation Commission
- Vision Utilities
- Vivax - Metrotech Corporation
- VMAX Electric Inc
- Volker Stevin Contracting
- VPSS1 Inc.
- Vulcan Construction and Maintenance, Inc.
- Vulcan Utility Signs
- VW Connect
- W. A. Rasic Construction Co., Inc.
- W. Bradley Electric, LLC.
- W.C. Drilling, Inc., dba West Coast Drilling
- W.C. Maloney
- W.C. Sanders Construction Inc.
- W.E. Curling Pipeline Inc
- W.E. Hayden Lease Service, Inc.
- W.K. McLellan Company
- Wahlund Construction, Inc.
- Walberg, Inc
- Walsh Construction II
- Washington 811 (Utilities Underground Location Center)
- Washington Gas
- Waste Recovery Systems
- Wavemode
- Weaver's Inc.
- Weiss Property Management
- West Michigan Underground Solutions
- West Valley Construction
- West Virginia 811
- Western Cherokee Wireless
- Western Cleanup Corporation
- Western Construction Inc.
- Western Midstream Partners, LP
- Western Properties D.B.A InContext
- Western States Contracting Inc (Nevada)
- Western Utility LLC
- Westfield Gas & Electric
- Westinghouse Electric Company
- WestLAND Group, Inc.
- Westward Fence, LLC
- Whitaker Construction Company Inc.
- Whit's-Turn Tree Care
- Wild Electric, Inc.
- Williams
- Wilson Construction Co.
- WIPF Construction LLC
- Wire Brothers Inc.
- Wolverine Pipe Line Company
- Wright Tree Service of the West, Inc.
- WRS Environmental Services, Inc. dba Champion Environmental Services
- WSB LLC
- WSP USA Inc.
- Wynnco Boring
- XCEL Energy Services
- Xtreme Powerline Construction Inc
- Yellow Jacket Drilling
- Yonkers Contracting Company, Inc.
- York County Natural Gas Authority
- Youngdahl Consulting Group Inc.
- Young's Environmental Cleanup, Inc.
- Z and H Associates, Inc.
- Zayo Group
- Zefiro Corporation
- ZTEX Construction, Inc.

List Current as of Jan. 9, 2026





Delivering Energy. Improving Lives.



Pipeline and Hazardous Materials Safety Administration



Platinum Members

Gold Members

Silver Members